



INDEX

8	Elica Connect
9	Product Features
16	Focus on Nikolatesla
44	Nikolatesla System Installation
158	GOOD TO KNOW
158	Odour filters
162	Remote motors
165	Accessories – Carbon Filters kit
166	Accessories – Chimney kits
167	Accessories – Shelf kits

NIKOLATESLA 18



NIKOLATESLA
ALPHA
40



NIKOLATESLA
ONE
39



NIKOLATESLA
FIT
28



NIKOLATESLA
ONE HP
38



NIKOLATESLA
FIT 3Z
33



NIKOLATESLA
PRIME S
– PRIME PLUS S
37



NIKOLATESLA
FIT XL
32



NIKOLATESLA
SWITCH
24



NIKOLATESLA
FLAME
41



NIKOLATESLA
SWITCH GLOW
22



NIKOLATESLA
LIBRA
34



NIKOLATESLA
UNPLUGGED
18

ARCH & LIGHTAIR 52



IKONA MAXXI
PURE
52
ELICA **AIR PURE**




YIN
57



NUANCE
56

WALL 58



ACUTA
91



AQUAVITAE2
87



BLOOM
69



ADÉLE2
77



ASCENT
70



BLOOM LUX
67



ALPHA
86



ASCENT
URBAN
71



CRUISE
88



APLOMB
61



BIO
81



DOLCE
82

WALL



GALAXY
80



PLAT
65



TAMAYA 2.0
88



HAIKU
73



REEF A
89



THIN
75



HAIKU 32
74



RULES
58



TONDA
90



IO AIR
85



SHY
84



TRIBE A
89



MAJESTIC
NO DRIP
72



STONE
90



METEORITE
83



SUPER PLAT
62
ELICA CONNECT

ISLAND 92



ADÉLÉ2 ISLAND
100



HAIKU
ISLAND 32
99



TRIBE A ISLAND
102



BIO ISLAND
95



METEORITE
ISLAND
101



TUBE PRO
ISLAND
103




GALAXY
ISLAND
101



REEF A ISLAND
102



HAIKU ISLAND
98



THIN ISLAND
92

CEILING 104



CLOUD SEVEN
115



HILIGHT-X
106



LULLABY
114
ELICA CONNECT



HILIGHT GLASS
109



ILLUSION PLUS
110
ELICA CONNECT



SKYDOME PLUS
104
ELICA CONNECT

DOWNDRAFT 116



GETUP
119
ELICA CONNECT




PANDORA
116

SUSPENDED 120



EASY UX
124



JUNO
127



SHINING
129



DIVA
133



JUNO URBAN
125



WAVE UX
128



IKONA LIGHT
123



PIX
132



INTERSTELLAR
120



PEARL
130

BUILT-IN 134



BOXIN
ADVANCE
143



ERA STD
150



LANE
138



BOXIN
DRY
140



ERA LUX
149



LEVER
155



BOXIN
HE
144



ERA HE
148



SKLOCK-S
154



BOXIN
LUX
145



FOLD
147



SLEEK 2.0
137



CT35 PRO
151



FOLD S
146



SLEEK
ADVANCE
136



ELITE 14
153



INTEGRATA
157



ELITE 35
152



KREA
156

ELICA CONNECT



THE ELICA CONNECT RANGE, DESIGNED TO MAKE LIFE EASIER

Elica has created a range of connected products controlled by a smartphone app or via a voice assistant to simplify the control of your extractor hood. Your voice assistant allows you to switch the hood extraction on and off, to select the speed and to adjust the intensity and tone of the light.

Elica Connect is a simple and intuitive app that can be downloaded in a matter of seconds. As well as enabling the remote operation of your hood – power, light brightness and warmth - you can view the filter status , access the maintenance guide and much more.

Airmatic

Hidden Advance, Boxin Advance, Skydome Plus and Illusion Plus are innovative hoods that Elica has equipped with smart sensors that make the appliance fully automatic, so capable of cleaning the air at any time of the day, not only while cooking.

The special sensor, located inside the hood, monitors air quality and detecting both the type of cooking and vapour quantity, as well as the presence of any pollutants. This information is used to automatically adjust the power of extraction and once the air quality is brought back to an ideal level, the hood switches off.

This technology provides the best user-friendliness, energy efficiency and low noise levels.

ELICA No Drip

Condensation is no longer a problem

When using an induction hob condensation is common as only the pan is heated so the surrounding air and surfaces remain cool. Excessive condensation can fall onto the hob or cookware and may damage the cabinets. Majestic No Drip, Boxin Dry, and Rules have been specifically developed to address this problem.



EXTRACTION



CONNECTIVITY

Elica leads the way in appliance connectivity. We can control our Wi-Fi enabled products with the Elica app or through voice control assistants. To turn it on or off, adjust the extraction speed or intensity and the colour of the light, simply click the App or ask Alexis. The Elica App can also monitor the status of the hood and notify you of any cleaning operations that are required or filters that need replacing.



BACK ASPIRATION

Hoods with this additional outlet offer greater installation flexibility. The aspiration function can be done by connecting the hood to ducting directly through the rear wall, avoiding the need for any visible ducting.



COMFORT SILENCE

With the widespread tendency to design kitchens as part of an open-plan living area, it has become increasingly important to be able to rely on hoods with greater power but which are also quieter, so they do not intrude on the surroundings. With Elica's Comfort Silence hoods, the sound level even at maximum extraction speed does not disturb or interfere with normal conversation.



SPECIAL MATERIAL

In the quest for beautiful and eye-catching products materials play a key role. Whether selected to make the product blend in or stand out they should always be durable and easy to maintain. They are fundamental in the process of innovation and Elica selects materials in which practicality and aesthetic impact are combined in a perfect balance. The wide selection of finishes available offers choice to suit every setting.



TOTAL INTEGRATION

The minimalist look is becoming increasingly popular in kitchens. The Total Integration products have been designed to be seamlessly integrated into the kitchen preserving the cleanest of lines.



SUPER EASY INSTALLATION

With the exclusive Elica Super Easy system, installation can be done in safety in just a few steps. After the hood is locked in place it can be finely adjusted so it is perfectly flush with the ceiling.



DELAY SWITCH OFF

A smart timer feature allows you to set the automatic switch-off of the product after a predetermined time. Delayed shutdown may be used in order to leave the hood on even after cooking, so to fully remove stubborn odours and residual humidity.



EASY MAINTENANCE

Keeping your hood clean not only ensures good hygiene in the kitchen but also a long life. Elica products are designed with materials and finishes for easy maintenance. All the components, such as the grease and odour filters, can be easily accessed and removed so they can be cleaned and if necessary replaced.

EXTRACTION



PERIMETER ASPIRATION

Hood extraction is efficiently distributed all along the perimeter of the appliance. The extraction zone is completely hidden by a panel, giving it a more elegant, modern, cleaner look.



HIGH PERFORMANCE
REGENERATABLE FILTER

The High Performance Regeneratable Filter has been developed by Elica for maximum performance. This filter guarantees a filtering efficiency of more than 80%, as compared to the market average of 60%. These filters can be regenerated in the same way as standard long life filters and also last for up to 3 years. These high performance filters are the ideal solution if you like cooking dishes which take a long time to cook..



REGENERATABLE FILTER

The traditional charcoal odour filters used when a hood is installed in recirculating mode must be replaced every 3 to 6 months. Elica has designed the innovative Regeneratable odour filter which can be regenerated and lasts up to three years. Just wash it with hot water and neutral soap or in the dishwasher at 65° and dry it in the oven at 100° for 10 minutes every 2 months and it will last for up to 3 years maintaining its original efficiency level of approximately 60%. To simplify maintenance operations and reduce environmental impact, Elica offers its Long Life Odour Filter, that can be washed and regenerated, making it last up to 3 years in comparison to traditional filters, which should be replaced every 3/6 months.



CERAMIC HP FILTER

Elica's latest filter for recirculating versions of NikolaTesla has been designed for the highest performance and the longest life. It's performance is maintained by simply regenerating in an oven and it lasts for up to 5 years making it the most environmentally friendly as well as cost effective filter available.

EXTRACTION



AIRMATIC

The Airmatic feature automatically treats your indoor air all day long. The sensor identifies air quality even after cooking, detecting unpleasant odours and vapors, as well as pollutants such as cleaning solvents, cigarette smoke and all volatile organic compounds (VOC). Using such information, the hood automatically regulates the extraction flow and once air quality has returned to an ideal level, it automatically switches off, thus avoiding any energy waste. This technology allows for the best balance between easy usability, energy savings and low noise levels.



AUTOCAPTURE

When it is important to focus only on cooking operations, you can activate this function. The aspiration system adjusts automatically to the number and power of the cooking zones you are using.



TUNE WHITE

The ability to choose the preferred shade of light always creates the right atmosphere. Our range starts from a very warm tone, 2400°K, to experience intimate and convivial moments, up to a cool daylight 5000°K, ideal during the preparation of food. With Tune White, you can also align the colour of the light from the hood with the rest of the lights in the room for uniform lighting.



DIM LIGHT

The level of illumination can be adjusted at any time to adapt to the time of day or to what's going on in the home. The dimmable LEDs always create the right atmosphere and reduce energy consumption..



MAINTENANCE ALARM

Products equipped with this feature have an indicator light that alerts the user when grease or odour filters are about to reach maximum saturation.



NO DRIP SYSTEM

The No Drip System addresses the problem of condensation when warm moist air comes in to contact with cold surfaces, especially when cooking on an induction hob. Products equipped with this system significantly reduce condensation and associated problems of it dripping onto the hob or food.



AIR PURIFICATION

ELICA AIR PURE



MULTIFUNCTION

Ikona Maxxi Pure incorporates a hood and air purifier. It has been designed to improve the quality of domestic air without needing to install additional devices or complex monitoring systems. The hood and purifier operate independently, without compromising either performance or usability. The “hood core” of Ikona Maxxi Pure efficiently eliminates cooking fumes and vapours. Alternatively, by activating the purifier, the air in the living area can be cleaned of allergens and pollutants helping create an atmosphere of well-being and tranquility throughout the day.



PURE SILENCE

Ikona Maxxi Pure is able to completely purify the air in a 30m² space in just 20 minutes. The air purifier is fitted with a special combined HEPA-carbon filter and can capture particles as small as 1 micron. It has two operating modes: “Boost” for intensive air cleaning, and “Super Silent”, perfect for silently purifying the room, working in the background.



COMBO PURE FILTER (HEPA-CARBON)

The special Combo Pure Filter, a combined HEPA and carbon filter, captures polluting agents, freeing the living area of unpleasant odours and allergens such as dust, animal hair, pollen, mould, and harmful residues produced by household detergents, paints and coverings. To maintain the efficiency of air purification, the filter must be replaced approximately once a year. Ikona Maxxi Pure will remind you to change it through an alert on the user interface to ensure the air you breaths is always healthy.

COOKING



STOP & GO

If you are interrupted whilst cooking, or you have to go into another room, or you just want a break, with just a single touch of the Stop&Go button you can switch off all the cooking zones and walk away with complete confidence and safety.



POWER LIMITATION

When you do not have a powerful enough electricity supply available you can set the Power Limitation during installation to limit the maximum power absorbed by your hob.



DUAL ZONE

The hob is equipped with two concentric zones, which can be used separately. Regardless of whether you use a small pot or large pan, your hob will always be at its best.



TEMPERATURE MANAGER

Your dishes will always be cooked at the perfect temperature when you use this function that lets you set the hob with 3 programmes (42, 72 or 92 degrees). The temperature settings have been optimised for both very delicate cooking (mousses, sauces, keeping dishes warm) as well as cooking at high power (boiling).



TIMER

Forget about cooking times by turning on the timer. Just set the minutes and start the countdown. At the end, the cooking zone will automatically switch off and a beeper will sound. You can set independent timers on more than one zone at the same time.



CHILD LOCK

The Child Lock function prevents the hob's cooking zones or extraction being turned on accidentally.



POT DETECTOR

With Pot Detector, the hob automatically detects the presence of the pot on the cooking area and provides heat only when it is correctly positioned

COOKING



BRIDGE ZONE

This function lets your merge 2 adjacent cooking zones, maintaining a uniform, constant temperature, even when using very large pans.



EXTRALARGE ZONE

Whether you are cooking for your entire family or some friends, our Extralarge Zone is just what you need. Cook using large pots and pans (up to 30 cm in diameter), or prepare special dishes faster, thanks to higher power levels in comparison to the average induction hob on the market.



MULTI FLEXI SPACE

With the Multi Flex Space design, you have more space available both in length and width when using large pots. You can slide the pans from one burner to another without lifting them.



MELTING MODE

The Melting Mode feature is the ideal solution for more delicate cooking, such as melting butter or chocolate, without ruining their texture or taste. The temperature is kept very low (below 50°) to assure that the ingredients fully melt, without the need to continuously mix them, and with no risk of ingredients sticking to the bottom of the pot.

COOKING



WARMING MODE

This feature was designed for low temperature cooking, ideal for heating liquids such as milk and broth, as well as creams and sauces without worrying about them over-heating. Furthermore, Warming Mode keeps prepared food warm, while other foods are still cooking.



SIMMERING MODE

This particular feature controls the power level of the cooking zone, allowing foods to simmer for long periods of time, preventing over-boiling and accidental liquid over-flow. At the same time, it prevents the hardening of foods or possible burning at the bottom of the pot, which is typical when preparing rice, soups and boiled vegetables.



FAST BOILING

This feature is perfect for foods that require faster cooking. Just one touch sets the cooking zone at maximum speed, for 10 minutes, bringing the contents of the pot to a boil 30% faster, in comparison to common induction hobs available on the market.



TASTY FRY

Whether cooking one or more portions, the hob always assures great tasting fried foods. The powerful induction system allows oil to reach an ideal frying temperature (180°) in half the time, in comparison to traditional hobs. In this way, food absorbs less oil, resulting in healthier dishes and the possibility of cooking more portions in less time.



PAUSE & RECALL

With Pause & Recall, you can switch off all the cooking areas with one single gesture and then, restart them with a simple press of a button at the same previously set power.



OPERATION AND MAIN ADVANTAGES

Quality of air has always been key to Elica's products, incorporating the very best technology in hobs for intelligent, high-performance, downdraft extraction of fumes and of odours.

HIGHEST EXTRACTION SPEED

All the NikolaTesla models have the highest extraction speed on the market at 5.1 m/s so they can capture all the fumes and odours as they start to rise for the best efficiency and performance available.



MORE SPACE FOR DRAWERS

The product has been designed to optimise the internal space of the cabinet. The adjustable outlet duct which sits flush at the rear of the cabinet makes room for deeper and more spacious drawers to store food or kitchen utensils.



SMART SENSORS AND THAT'S ALL YOU NEED TO KNOW

The innovative Airmatic function involves the use of smart sensors which are able to detect the quantity and quality of the fumes produced and to set the most suitable extraction power accordingly.

SELF-ADJUSTING EXTRACTION

With Autocapture, you can concentrate on your recipe and leave the hob to automatically adjust the extraction speed based on the number and power of the cooking zones being used.

FAST AND EASY TO CLEAN

The smooth, seamless surface of NikolaTesla is one of the innovative features of the new generation of Elica extraction hobs. The seamless ceramic glass is an elegant design detail that also makes short work of cleaning.



PRACTICAL MAINTENANCE

Beauty is combined with practicality when it comes to maintenance as well. The system, patented by Elica, allows the grease filters and the ceramic odour filters used by recirculating models to be removed from above. The large opening with its stylish cover means the spillage compartment can be washed easily and safely.

IMPROVED ODOUR FILTERING CAPABILITY

The recirculating models in the NikolaTesla range feature a ceramic filter with a very high odour purification efficacy of over 82% compared to a market average of 60%. It can be regenerated for up to 3 years simply by putting it in the oven at 200°C for 45 minutes every 2 to 3 months which makes it both environmentally friendly and very cost effective.

INTUITIVE AND USER-FRIENDLY INTERFACE

Elica extractor hobs feature a simple and intuitive interface to allow you to enjoy the pleasure of cooking every day. The touch control panel allows the cooking areas and hood to be controlled separately and, in standby mode, it becomes totally invisible. Controlling cooking has never been so easy and convenient.





NIKOLATESLA UNPLUGGED

DESIGN FABRIZIO CRISÀ



NIKOLATESLA UNPLUGGED

DESIGN FABRIZIO CRISÀ




BIGSEE
PRODUCT DESIGN
AWARD 2022
WINNER



90x53x21 cm
80,7x49,2 cm (cut)
Duct-out / Re-circulating
Black glass, Black glass + stainless steel





Conceived to create a natural and immediate relationship between the user and the product, NikolaTesla UNPLUGGED is controlled through perfectly weighted knobs which provide smooth, instantaneous and intuitive access to all its features. The great advantage of knobs is that they are equally responsive even when your hands are wet or greasy.

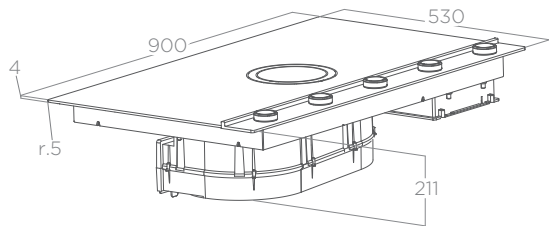

	EXTRACTOR	
	DUCT-OUT	RE-CIRCULATING
Controls	Electronic rotary control	Electronic rotary control
Speeds	9 + boost	9 + boost
Booster airflow	630 m³/h	550 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	33 - 66 dBA	39 - 72 dBA
Total power absorption	175 W	175 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included

	INDUCTION HOB	
Controls	Electronic rotary control	
Speeds	9 + boost	
Absorption	7,2 kW	
Power limitation	4,5 kW	
Voltage	220 - 240 V	
Cooking zones (Size-Power)	<div><div>220x184 mm - 2,1/3,7 kW</div><div>220x184 mm - 2,1/3,7 kW</div><div>220x184 mm - 2,1/3,7 kW</div><div>220x184 mm - 2,1/3,7 kW</div></div>	
Bridge zone	2	



ACCESSORIES		
Replacement Ceramic Filter		KIT0120952A
Nikolatesla filtering kit for base depth >70 cm		KIT0140820



MODELS		
NIKOLATESLA UNPLUGGED Black Duct-out		PRF0184546
NIKOLATESLA UNPLUGGED Black Re-circulating (*)		PRF0184019
NIKOLATESLA UNPLUGGED Black and stainless steel Duct-out		PRF0184547
NIKOLATESLA UNPLUGGED Black and stainless steel Re-circulating (*)		PRF0184545

(*) Model not subject to compulsory energy certification.




Thanks to our Elica patented solution, ceramic odour filters are easily removable from the top.




NIKOLATESLA SWITCH GLOW

DESIGN FABRIZIO CRISÀ

83x51,5x21 cm
80,7x49,2 cm (cut)
Duct-out / Re-circulating
Black glass

 Illuminated controls can be difficult to read in some lighting conditions so SWITCH GLOW incorporates the brightest white on black illumination for effortless navigation through settings and making adjustments a breeze even in very bright or dimly lit kitchens.

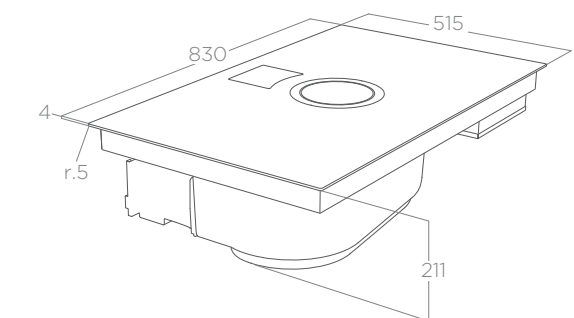

	EXTRACTOR	
	DUCT-OUT	RE-CIRCULATING
Controls	Slider touch control	Slider touch control
Speeds	9 + boost	9 + boost
Booster airflow	630 m³/h	550 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	33 - 66 dBA	39 - 72 dBA
Total power absorption	175 W	175 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included

	INDUCTION HOB	
Controls	Touch control direct slider	
Speeds	9 + boost	
Absorption	7,2 kW	
Power limitation	3,1 - 4,5 kW	
Voltage	220 - 240 V	
Cooking zones (Size-Power)	<div><div>1210x191 mm - 2,1/3 kW</div><div>2210x191 mm - 2,1/3 kW</div><div>3210x191 mm - 2,1/3 kW</div><div>4210x191 mm - 2,1/3 kW</div></div>	
Bridge zone	2	




ACCESSORIES	
Replacement Ceramic Filter	KIT0120952A
Nikolatesla filtering kit for base depth >70 cm	KIT0140820



MODELS	
NIKOLATESLA SWITCH GLOW Black Duct-out	PRF0183880
NIKOLATESLA SWITCH GLOW Black Re-circulating (*)	PRF0183878


(*) Model not subject to compulsory energy certification.

 Thanks to our Elica patented solution, ceramic odour filters are easily removable from the top.

NIKOLATESLA SWITCH

DESIGN FABRIZIO CRISÀ



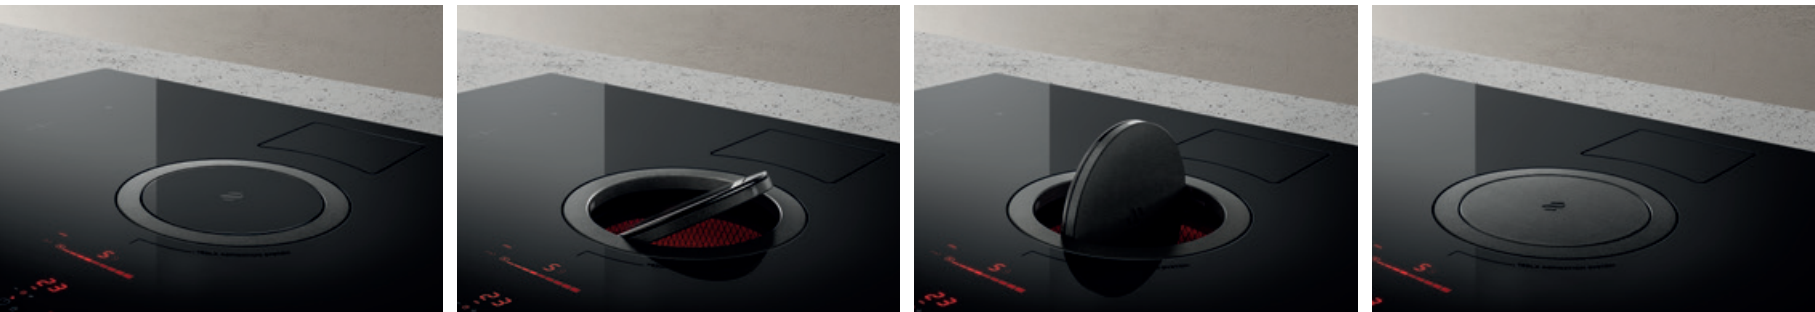


NIKOLATESLA SWITCH


DESIGN FABRIZIO CRISÀ

83x51,5x21 cm
80,7x49,2 cm (cut)
Duct-out / Re-circulating
Black glass, white glass "ICE GREY"

An elegant disk in black or white glass conceals the heart of the extraction unit - activate with a simple touch. The Direct Slider interface allows the various cooking and extraction areas to be controlled simply and intuitively.


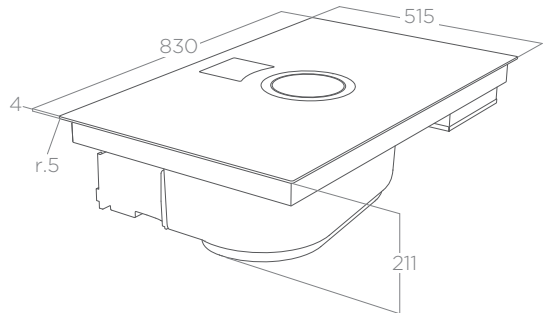


	EXTRACTOR	
	DUCT-OUT	RE-CIRCULATING
Controls	Slider touch control	Slider touch control
Speeds	9 + boost	9 + boost
Booster airflow	630 m³/h	550 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	33 - 66 dBA	39 - 72 dBA
Total power absorption	175 W	175 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included



ACCESSORIES	
Replacement Ceramic Filter	KIT0120952A
Nikolatesla filtering kit for base depth >70 cm	KIT0140820

INDUCTION HOB	
Controls	Touch control direct slider
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones (Size-Power)	1 210x191 mm - 2,1/3 kW 2 210x191 mm - 2,1/3 kW 3 210x191 mm - 2,1/3 kW 4 210x191 mm - 2,1/3 kW
Bridge zone	2

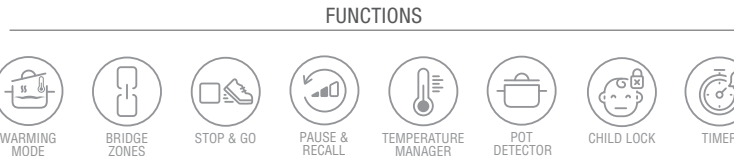

MODELS	
NIKOLATESLA SWITCH Black Duct-out	PRF0189241
NIKOLATESLA SWITCH Black Re-circulating (*)	PRF0189247
NIKOLATESLA SWITCH White Duct-out	PRF0146216A
NIKOLATESLA SWITCH White Re-circulating (*)	PRF0146213A

Thanks to our Elica patented solution, ceramic odour filters are easily removable from the top.

(*) Model not subject to compulsory energy certification.



NIKOLATESLA FIT

DESIGN FABRIZIO CRISÀ




NIKOLATESLA FIT

DESIGN FABRIZIO CRISÀ


60x51,5x25 cm 72x51,5x25 cm
56x49 cm (cut)
Duct-out / Re-circulating
Black glass




All the performance of an Elica NikolaTesla hob in 60cm and 72cm spaces.

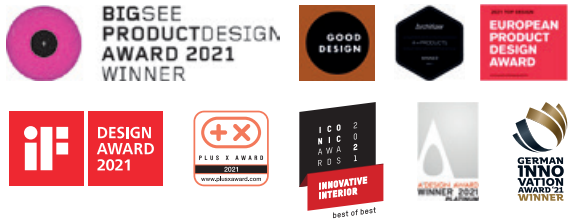

NIKOLATESLA FIT 72

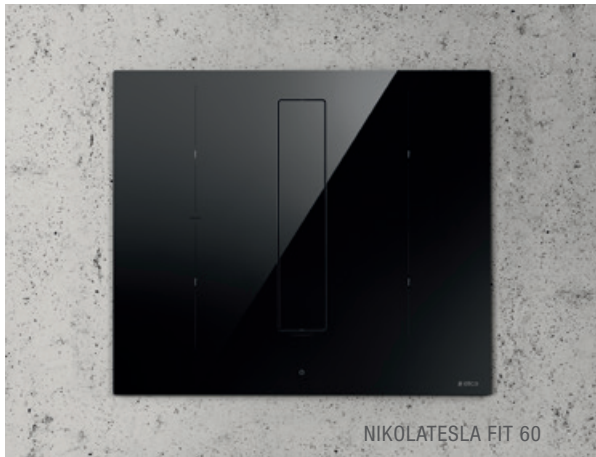

NIKOLATESLA FIT 60

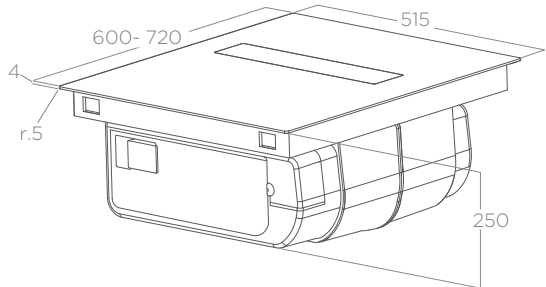

EXTRACTOR	
Controls	Slider touch control
Speeds	4 + boost
Booster airflow	620 m³/h
Suction speed	5,1 m/s
Noise level min-max	37 - 61 dBA
Total power absorption	160 W
Aluminium grease filter	Included

COMFORT SILENCE

AUTO CAPTURE

CERAMIC HP FILTER

SUPER EASY INSTALLATION

TOTAL INTEGRATION

EASY MAINTENANCE

DELAY SWITCH OFF

MAINTENANCE ALARM

222x89 mm

ENERGY CLASS (A+++/D)

ACCESSORIES	
Replacement Ceramic filter	KIT0167755
Filtering Kit Plinth In (1st Installation kit)	KIT0167756
Filtering Kit Plinth Out (1st Installation kit)	KIT0167757
Filtering Kit back outlet (1st Installation kit)	KIT0180522

INDUCTION HOB	
Controls	Slider touch control
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones (Size-Power)	1 210x191 mm - 2,1/3 kW 2 210x191 mm - 1,65/1,85 kW 3 Ø200 mm - 2,3/3 kW 4 Ø160 mm - 1,2/1,4 kW
Bridge zone	1 left

WARMING MODE

BRIDGE ZONES

STOP & GO

CHILD LOCK

TIMER

MODELS	
NIKOLATESLA FIT 60 Black	PRF0189181
NIKOLATESLA FIT 70 Black	PRF0189188

PATENTED Thanks to the ventilation system with Elica patented dual air entry, the product is especially compact and quiet.




NIKOLATESLA FIT XL

DESIGN FABRIZIO CRISÀ

83x51,5x25 cm
75x49 cm (cut)
Duct-out / Re-circulating
Black glass

The total installation flexibility and linear design of NikolaTesla FIT, is now available in the 80 cm size. The extractor is completely hidden and may be activated with just a simple touch.

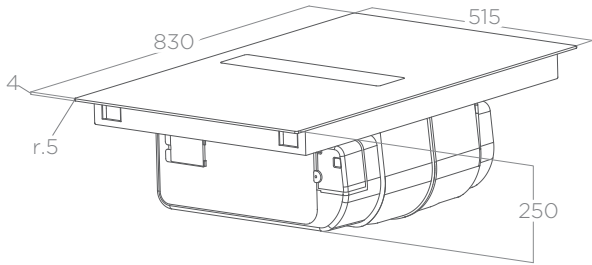


EXTRACTOR	
Controls	Slider touch control
Speeds	4 + boost
Booster airflow	620 m³/h
Suction speed	5,1 m/s
Noise level min-max	43 - 61 dBA
Total power absorption	160 W
Aluminium grease filter	Included



ACCESSORIES	
Replacement Ceramic filter	KIT0167755
Filtering Kit Plinth In (1st Installation kit)	KIT0167756
Filtering Kit Plinth Out (1st Installation kit)	KIT0167757
Filtering Kit back outlet (1st Installation kit)	KIT0180522

INDUCTION HOB	
Controls	Slider touch control
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones (Size-Power)	1 210x191 mm - 1,65/1,85 kW 2 210x191 mm - 2,1/3 kW 3 210x191 mm - 2,1/3 kW 4 210x191 mm - 1,65/1,85 kW
Bridge zone	2



MODELS	
NIKOLATESLA FIT XL Black	PRF0179476

PATENTED Thanks to the ventilation system with Elica patented dual air entry, the product is especially compact and quiet.




NIKOLATESLA FIT 3Z

DESIGN FABRIZIO CRISÀ

60x51,5x26 cm 72x51,5x26 cm
56x49 cm (cut)
Duct-out / Re-circulating
Black glass

First three zone extractor hob on the market. Whether cooking for family or friends, the large 30cm zone allows you to use very large cookware.

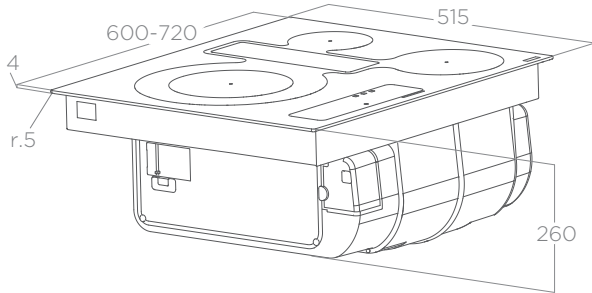


EXTRACTOR	
Controls	Slider touch control
Speeds	4 + boost
Booster airflow	600 m³/h
Suction speed	5,1 m/s
Noise level min-max	42 - 61 dBA
Total power absorption	160 W
Aluminium grease filter	Included



ACCESSORIES	
Replacement Ceramic filter	KIT0167755
Filtering Kit Plinth In (1st Installation kit)	KIT0167756
Filtering Kit Plinth Out (1st Installation kit)	KIT0167757
Filtering Kit back outlet (1st Installation kit)	KIT0180522

INDUCTION HOB	
Controls	Slider touch control
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones (Size-Power)	1 Ø300 mm - 2,5/3,6 kW Ø180 mm - 2,1/2,5 kW 2 Ø140 mm - 0,9/1,35 kW 3 Ø180 mm - 1,4/2,1 kW



MODELS	
NIKOLATESLA FIT 3Z 60 Black	PRF0184526
NIKOLATESLA FIT 3Z 70 Black	PRF0184551

PATENTED Thanks to the ventilation system with Elica patented dual air entry, the product is especially compact and quiet.



NIKOLATESLA LIBRA

DESIGN FABRIZIO CRISÀ




NIKOLATESLA LIBRA


DESIGN FABRIZIO CRISÀ

83x51,5x21 cm
80,7x49,2 cm (cut)
Duct-out / Re-circulating
Black glass + cast iron, white glass "ICE GREY" + cast iron

The only extractor hob with built-in scales.

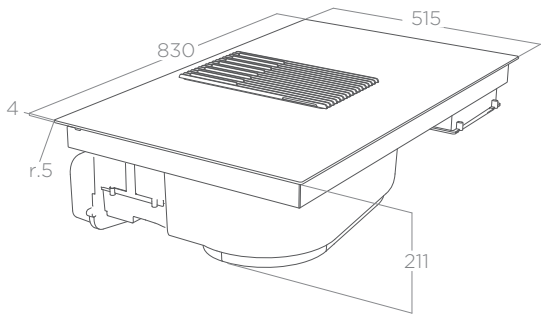


EXTRACTOR		
	DUCT-OUT	RE-CIRCULATING
Controls	Slider touch control	Slider touch control
Speeds	3 + 2 boost	3 + 2 boost
Booster airflow	610 m³/h	545 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	46 - 69 dBA	48 - 71 dBA
Total power absorption	250 W	250 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included



ACCESSORIES	
Replacement ceramic filter	KIT0120952A
Nikolatesla filtering kit for base depth >70 cm	KIT0140820

(*) Model not subject to compulsory energy certification.

INDUCTION HOB	
Controls	Slider touch control
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones	1 210x191 mm - 1,6/1,85 kW
(Size-Power)	2 210x191 mm - 2,1/3 kW
	3 210x191 mm - 2,1/3 kW
	4 210x191 mm - 1,6/1,85 kW
Bridge zone	2



FUNCTIONS



MODELS	
NIKOLATESLA LIBRA Black Duct-out	PRF0147744A
NIKOLATESLA LIBRA Black Re-circulating (*)	PRF0147745A
NIKOLATESLA LIBRA White Duct-out	PRF0147774A
NIKOLATESLA LIBRA White Re-circulating (*)	PRF0147775A

This product is equipped with two Elica patented solutions. The first is its ceramic odour filters that are easily removeable from the top. The second is an electronic scale, integrated into the extractor hob that makes best use of available space, adding even more functionality to cooking and extraction.




NIKOLATESLA PRIME S - PRIME PLUS S

DESIGN FABRIZIO CRISÀ


83x51,5x25 cm
75x49 cm (cut)
Duct-out / Re-circulating
Black glass + aluminium cast iron effect

The elegant and sturdy aluminum pan rests combine design requirements for efficient odour capture with a practical work surface.

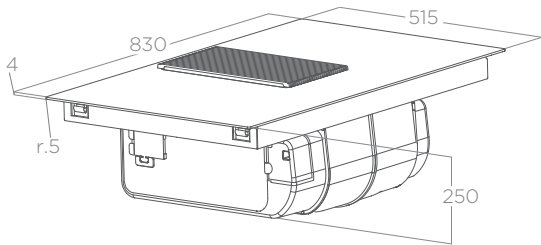


	EXTRACTOR	
	DUCT-OUT	RE-CIRCULATING
Controls	Slider touch control	Slider touch control
Speeds	4 + boost	4 + boost
Booster airflow	620 m³/h	535 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	44 - 63 dBA	49 - 69 dBA
Total power absorption	160 W	160 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included


INDUCTION HOB	
Controls	Slider touch control
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones	1 Ø160 mm - 1,2/1,4 kW
(Size-Power)	2 Ø200 mm - 2,3/3 kW
	3 Ø200 mm - 2,3/3 kW
	4 Ø160 mm - 1,2/1,4 kW
Bridge zones	1 (Prime Plus S)



FUNCTIONS



MODELS	
NIKOLATESLA PRIME S Black Duct-out	PRF0189225
NIKOLATESLA PRIME S Black Re-circulating (*)	PRF0189229
NIKOLATESLA PRIME PLUS S Black Duct-out	PRF0182325
NIKOLATESLA PRIME PLUS S Black Re-circulating (*)	PRF0186751

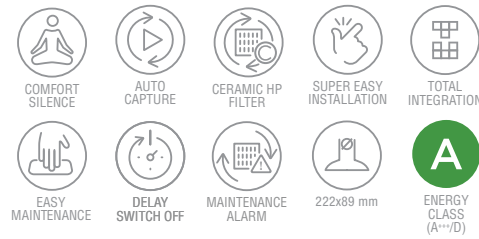

ACCESSORIES	
Replacement Ceramic Filter	KIT0167755

(*) Model not subject to compulsory energy certification.

Thanks to the ventilation system with Elica patented dual air entry, the product is especially compact and quiet.






NIKOLATESLA ONE HP

DESIGN FABRIZIO CRISÀ



83x51,5x21 cm
80,7x49,2 cm (cut)
Duct-out / Re-circulating
Black glass

The product, winner of the 25th ADI Compasso d'Oro award, combines cutting-edge downdraft technology with Elica's signature state-of-the-art design. The Direct Slider interface allows the various cooking and extraction areas to be controlled simply and intuitively.

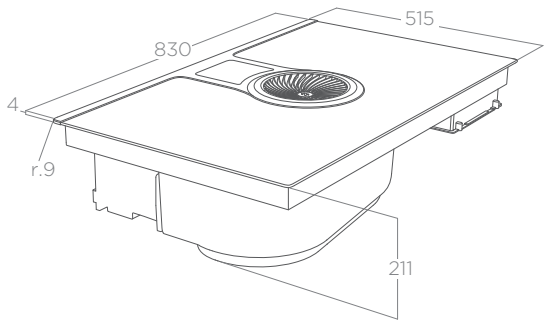

EXTRACTOR		
Controls	DUCT-OUT Slider touch control	RE-CIRCULATING Slider touch control
Speeds	9 + boost	9 + boost
Booster airflow	640 m³/h	545 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	34 - 66 dBA	40 - 72 dBA
Total power absorption	175 W	175 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included

INDUCTION HOB	
Controls	Touch control direct slider
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	4,5 kW
Voltage	220 - 240 V
Cooking zones (Size-Power)	1 220x184 mm - 2,1/3,7 kW 2 220x184 mm - 2,1/3,7 kW 3 220x184 mm - 2,1/3,7 kW 4 220x184 mm - 2,1/3,7 kW
Bridge zone	2



ACCESSORIES	
Replacement Ceramic Filter	KIT0120952A
Nikolatesla filtering kit for base depth >70 cm	KIT0140820



MODELS	
NIKOLATESLA HP Black Duct-out	PRF0120975B
NIKOLATESLA HP Black Re-circulating (*)	PRF0120976B

Thanks to our Elica patented solution, ceramic odour filters are easily removable from the top.

(*) Model not subject to compulsory energy certification.




NIKOLATESLA ONE

DESIGN FABRIZIO CRISÀ



83x51,5x21 cm
80,7x49,2 cm (cut)
Duct-out / Re-circulating
Black glass

The product, winner of the 25th ADI Compasso d'Oro award, combines cutting-edge downdraft technology with Elica's signature state-of-the-art design. The Direct Slider interface allows the various cooking and extraction areas to be controlled simply and intuitively.

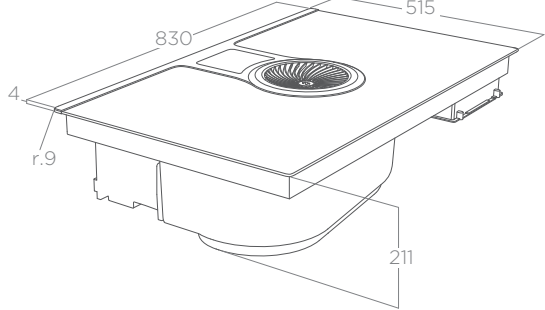


EXTRACTOR		
Controls	DUCT-OUT Touch control	RE-CIRCULATING Touch control
Speeds	9 + boost	9 + boost
Booster airflow	640 m³/h	545 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	34 - 66 dBA	40 - 72 dBA
Total power absorption	175 W	175 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included

INDUCTION HOB	
Controls	Touch control
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones (Size-Power)	1 210x191 mm - 1,6/1,85 kW 2 210x191 mm - 2,1/3 kW 3 Ø200 mm - 2,3/3 kW 4 Ø160 mm - 1,2/1,4 kW
Bridge zone	1 left



ACCESSORIES	
Replacement Ceramic Filter	KIT0120952A
Nikolatesla filtering kit for base depth >70 cm	KIT0140820

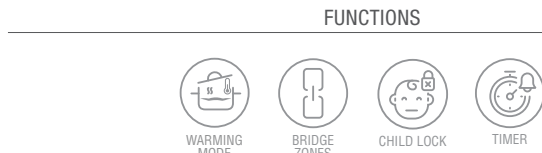

MODELS	
NIKOLATESLA Black Duct-out	PRF0120977A
NIKOLATESLA Black Re-circulating (*)	PRF0120978A

Thanks to our Elica patented solution, ceramic odour filters are easily removable from the top.

(*) Model not subject to compulsory energy certification.




NIKOLATESLA ALPHA

DESIGN FABRIZIO CRISÀ


78x51,5x25 cm
75x49 cm (cut)
Duct-out / Re-circulating
Black glass

The sleek look of the extractor hob with black aluminum details, beautifully adapts to any kitchen style.

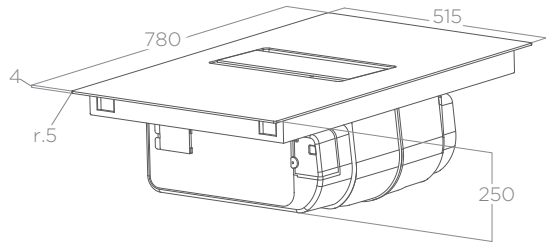

EXTRACTOR	
Controls	Slider touch control
Speeds	4 + boost
Booster airflow	580 m³/h
Suction speed	5,1 m/s
Noise level min-max	43 - 61 dBA
Total power absorption	160 W
Aluminium grease filter	Included

INDUCTION HOB	
Controls	Slider touch control
Speeds	9 + boost
Absorption	7,2 kW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones	1 Ø160 mm - 1,2/1,4 kW 2 Ø200 mm - 2,3/3 kW 3 Ø200 mm - 2,3/3 kW 4 Ø160 mm - 1,2/1,4 kW



ACCESSORIES	
Replacement Ceramic filter	KIT0167755
Filtering Kit Plinth In (1st Installation kit)	KIT0167756
Filtering Kit Plinth Out (1st Installation kit)	KIT0167757
Filtering Kit back outlet (1st Installation kit)	KIT0180522

FUNCTIONS	
WARMING MODE	STOP & GO
CHILD LOCK	TIMER
MODELS	
NIKOLATESLA ALPHA Black	PRF0183127

Thanks to the ventilation system with Elica patented dual air entry, the product is especially compact and quiet.




NIKOLATESLA FLAME

DESIGN FABRIZIO CRISÀ


88x51x21 cm
84x48,7cm (cut)
Duct-out / Re-circulating
Black glass + cast iron, grey glass + cast iron

The first gas extraction hob. The cast iron pan supports combine aesthetic appeal and functionality with the utmost safety. There is even a wok support available as an accessory.

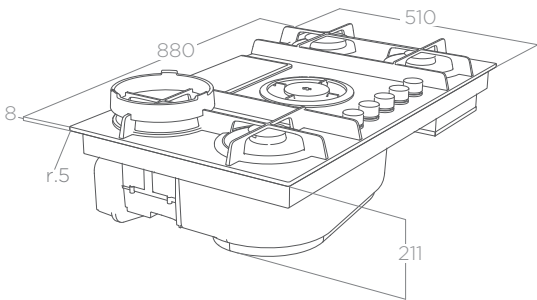

EXTRACTOR		
	DUCT-OUT	RE-CIRCULATING
Controls	Rotary	Rotary
Speeds	3 + 2 boost	3 + 2 boost
Booster airflow	600 m³/h	530 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	45 - 63 dBA	49 - 69 dBA
Total power absorption	250 W	250 W
Aluminium grease filter	Included	Included
Ceramic filter	*	Included

GAS HOB	
Controls	Rotary
Voltage	220 - 240 V
BURNER TYPE	
1st element	Semi rapid (1,75 kW)
2nd element	Dual special (3,5kW)
3rd element	Rapid (3 kW)
4th element	Semi rapid (1,75 kW)



FUNCTIONS	
DUAL ZONE	MULTI FLEXI SPACE

MODELS	
NIKOLATESLA FLAME Black Duct-out	PRF0147740A
NIKOLATESLA FLAME Black Re-circulating (*)	PRF0147741A
NIKOLATESLA FLAME Grey Duct-out	PRF0147742A
NIKOLATESLA FLAME Grey Re-circulating (*)	PRF0147743A



ACCESSORIES	
Replacement Ceramic Filter	KIT0120952A
Kit wok Flame	KIT0160040
Nikolatesla filtering kit for base depth >70 cm	KIT0140820

(*) Model not subject to compulsory energy certification.

This product is equipped with two Elica patented solutions. The first and most important patent makes it possible to cook in total safety, extracting vapours and odours from below, without compromising the efficiency of the gas burners. The second is its ceramic odour filters that are easily removeable from the top.



NIKOLATESLA FLAME

DESIGN FABRIZIO CRISÀ

All NikolaTesla extractor hobs allow for very flexible installation. In order to meet most installation needs, Elica has developed various installation solutions that will be explained in the following section. As a result, the structural characteristics of the appliance chosen will make installation operations easier.


NIKOLATESLA ALPHA - FIT - FIT XL - FIT 3Z - PRIME S - PRIME PLUS S

DUCT-OUT MODE - WHAT'S IN THE BOX

These NikolaTesla models guarantee great installation flexibility, in the duct-out version. The optional piping offered by Elica (sold separately) allows fumes to be conveyed towards an outlet found outside the home, thus ensuring high performance and very low noise levels.

FILTERING MODE

Elica has designed 3 different kits to convert the product to the re-circulating mode, to be used according to installation needs.

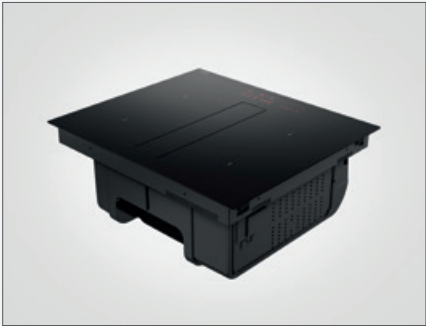


In the box



Example of installation



Installation "PLINTH IN"



Installation "PLINTH OUT"



Installation "BACK OUTLET"

KIT0167756 | RE-CIRCULATING INSTALLATION KIT UNDER PLINTH (MIN H6CM) "PLINTH IN"

If the product purchased is in duct-out mode, this kit will allow it to be installed in re-circulating mode. The filtered air will be conveyed into the cabinet base.

A chrome-plated trim profile is provided for any vent slot, made in the cabinet baseboard.




- Ceramic filters (2 pieces)
- 90° - 94 x 227 mm rectangular bend
- 500 x 94 x 227 mm rectangular pipe
- 90° rectangular bend from vert. 94 x 227 mm to horiz. 55 x 227 mm
- Under baseboard deflector
- Chrome-plated trim profile
- Adhesive Tape



KIT0167757 | RE-CIRCULATING INSTALLATION KIT OUT OF THE PLINTH (MIN H6CM) "PLINTH OUT"

By purchasing this kit, it is possible to convert and install the product in re-circulating mode, thus conveying purified air into, and then outside the baseboard, through a special funnel-shaped pipe with an aesthetic profile on its edge, finishing the vent hole.

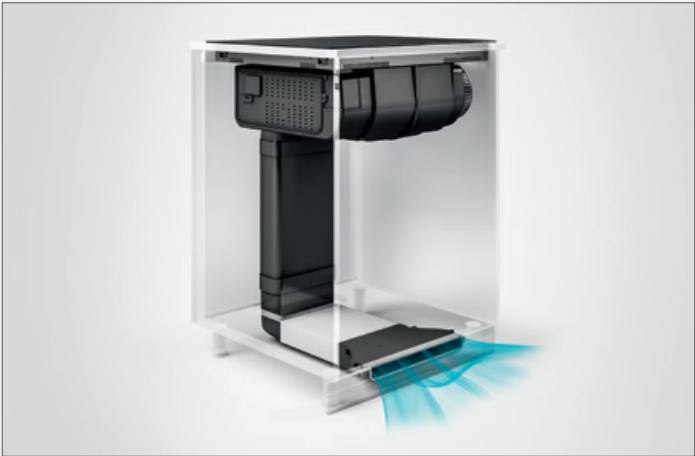

- Ceramic filters, 2 pieces
- 90° - 94 x 227 mm rectangular bend
- 500 x 94 x 227 mm rectangular pipe
- 90° rectangular bend from vert. 94 x 227 mm to horiz. 50 x 227 mm
- Outlet connection to be fitted outside the baseboard, provided with chrome-plated trim profile
- 218 x 55 x 300 mm rectangular pipe
- Outlet connection support
- Adhesive tape

KIT0180522 | RE-CIRCULATING INSTALLATION KIT "BACK OUTLET"

This kit allows the product to be converted into filtering mode. The air flow is conveyed backwards and left to flow, in the simplest possible way, into the interspace between the wall and the cabinet without the use of any additional pipes.



- Ceramic filters, 2 pieces
- Telescopic outlet connection
- Chrome-plated trim profile



NIKOLATESLA UNPLUGGED - SWITCH GLOW - SWITCH ONE HP - ONE - LIBRA - FLAME

This platform has also been designed to guarantee maximum installation flexibility by optimizing space inside the cabinet.

NikolaTesla models associated with this platform can be purchased both in duct-out and re-circulating version. In both cases, the product is supplied ‘ready’ for installation (in the basic versions). In case of different installation needs, bends and pipes are available to be purchased as accessories.

RE-CIRCULATING MODE - WHAT’S IN THE BOX

If the re-circulating version product code has been purchased, the packaging will contain everything needed to install NikolaTesla with a ducted outlet to the cabinet baseboard, including the exclusive chrome-plated trim profile to finish the baseboard cut, necessary for air outlet.



(*) Examples of re-circulating mode configuration

In the box (re-circulating mode PLINTH OUT) (*)



- Ceramic filters (3 pieces)
- Ceramic filter frame assembly
- 90° - 94 x 227 mm Rectangular bend
- 90° rectangular bend from vert. 94 x 227 mm to horiz. 50 x 227 mm
- 500 x 94 x 227 mm rectangular pipe
- 218 x 55 x 300 mm rectangular pipe
- Outlet connection to fit outside the baseboard, provided with chrome-plated trim profile
- 2 extension connections for >60 and >65 cabinet
- Outlet connection supports
- Adhesive tape

DUCT-OUT VERSION - WHAT’S IN THE BOX

In the box (duct-out version)



- Rear outlet connection
- 90° - 94 x 227 mm rectangular bend
- 15° connection (4 pieces)
- 500 x 94 x 227 mm rectangular pipe

If the duct-out version product code has been purchased , the packaging will contain all piping to install the product in this mode. Any necessary piping to connect to the air/fume outlet outside the house, shall be purchased as separate accessories.



(*) Example of duct-out mode configuration with lateral outlet



Configuration in duct-out mode with the air outlet in the rear wall, is also possible and the necessary piping shall be purchased as separate accessories.




(*) Example of duct-out mode configuration with rear outlet

(*) For NIKOLATESLA PRIME S the pipes contained in the packaging may differ from the image. Refer to the installation manual.

KIT0140820 | FILTERING MODE KIT FOR DEEP CABINETS

In the case of installation in kitchen cabinets deeper than standard ones, Elica provides a kit to move the piping as far backward as possible, in order to maximize drawer capacity.

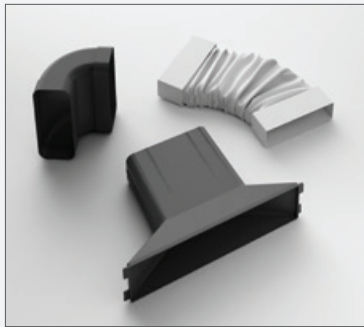

Available for models
NIKOLATESLA ONE/ONE HP/SWITCH GLOW/
SWITCH/UNPLUGGED/LIBRA/FLAME

- Extension connection for > 70 cm cabinet
- 90° - 94 x 227 mm rectangular bend
- 218 x 55 mm flexible connection


Examples of filtering mode configuration with deep cabinet




	AVAILABLE IN	PIPES IN THE PACKAGE	RE-CIRCULATING INSTALLATION KIT	PRODUCT H
NIKOLATESLA ALPHA	Duct-out / Re-circulating	no	PLINTH IN / PLINTH OUT / BACK OUTLET	25 cm
NIKOLATESLA FIT	Duct-out / Re-circulating	no	PLINTH IN / PLINTH OUT / BACK OUTLET	25 cm
NIKOLATESLA FIT XL	Duct-out / Re-circulating	no	PLINTH IN / PLINTH OUT / BACK OUTLET	25 cm
NIKOLATESLA FIT 3Z	Duct-out / Re-circulating	no	PLINTH IN / PLINTH OUT / BACK OUTLET	26 cm
NIKOLATESLA PRIME S - PRIME PLUS S	Duct-out	yes	---	25 cm
	Re-circulating	yes (PLINTH OUT)	---	
NIKOLATESLA UNPLUGGED	Duct-out	yes	---	21 cm
	Re-circulating	yes (PLINTH OUT)	---	
NIKOLATESLA SWITCH GLOW	Duct-out	yes	---	21 cm
	Re-circulating	yes (PLINTH OUT)	---	
NIKOLATESLA SWITCH	Duct-out	yes	---	21 cm
	Re-circulating	yes (PLINTH OUT)	---	
NIKOLATESLA ONE HP NIKOLATESLA ONE	Duct-out	yes	---	21 cm
	Re-circulating	yes (PLINTH OUT)	---	
NIKOLATESLA LIBRA	Duct-out	yes	---	21 cm
	Re-circulating	yes (PLINTH OUT)	---	
NIKOLATESLA FLAME	Duct-out	yes	---	21 cm
	Re-circulating	yes (PLINTH OUT)	---	



ACCESSORY PIPE FITTINGS FOR DUCT-OUT VERSION

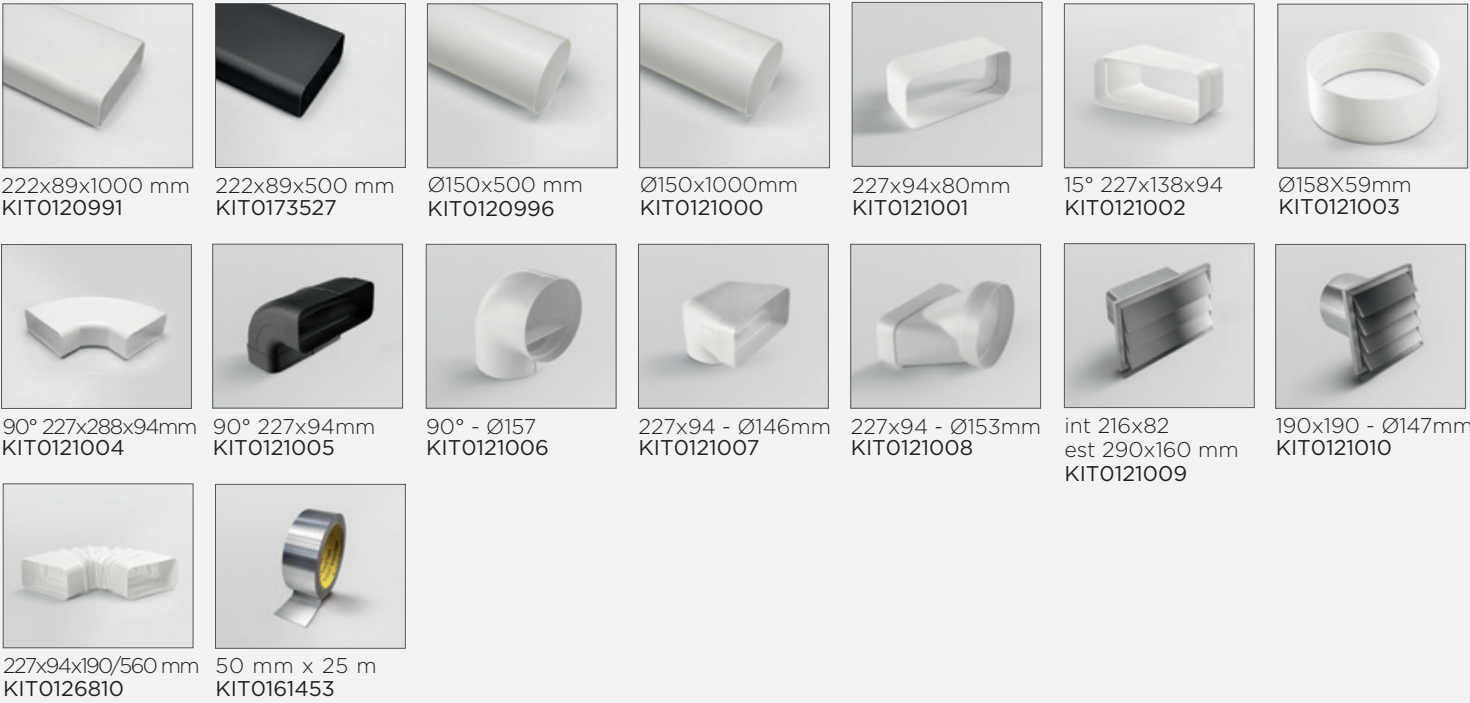


ACCESSORY PIPE FITTINGS FOR RE-CIRCULATING VERSION

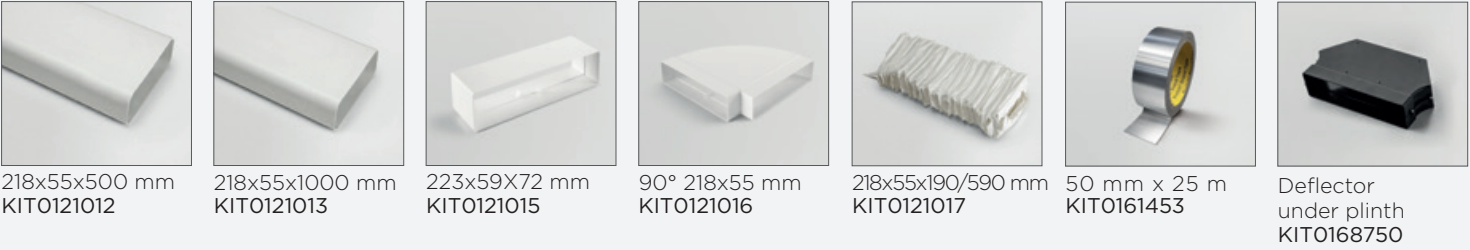

HP REGENERATABLE ANTI-ODOUR CERAMIC FILTER


The ceramic filter is a modular charcoal filter that can be thermally regenerated in the oven every 2/3 months at 200°for 45 minutes, up to max 5 years. It allows for very high odour absorption efficiency and very high mechanical strength.

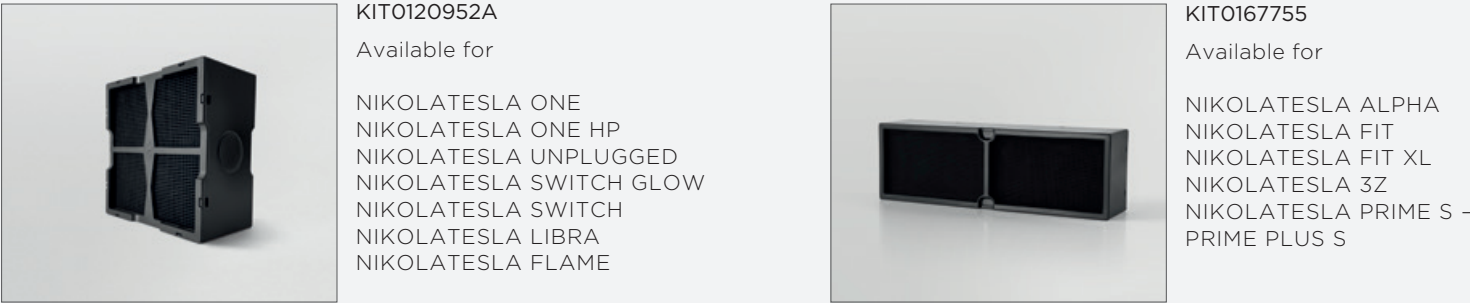


SYSTEM INSTALLATION

NIKOLATESLA ALPHA

Standard Installation

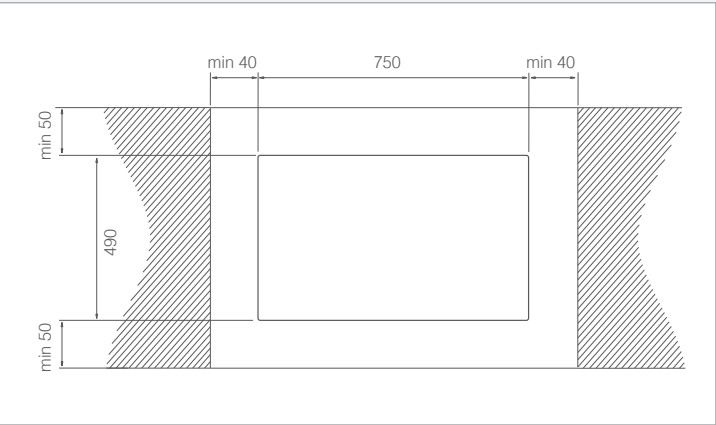


Flush Installation

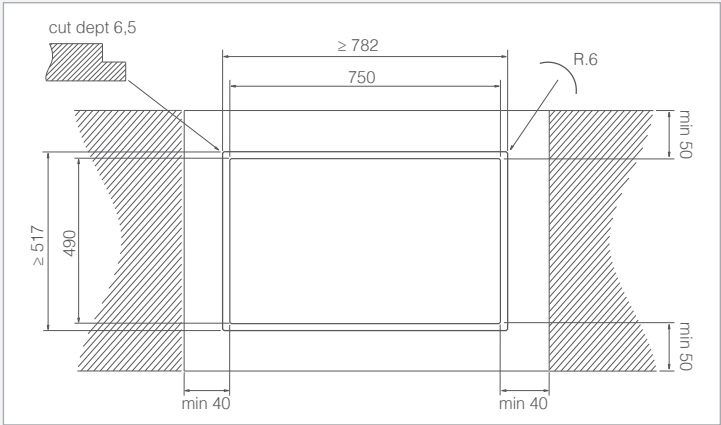


NIKOLATESLA FIT - FIT 3Z

Standard Installation

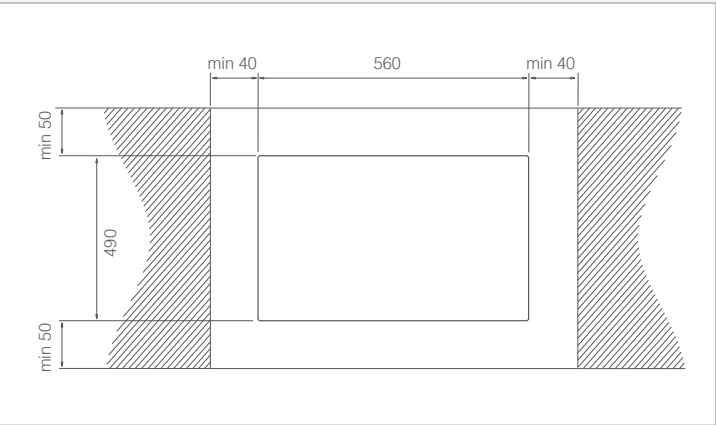


Flush Installation

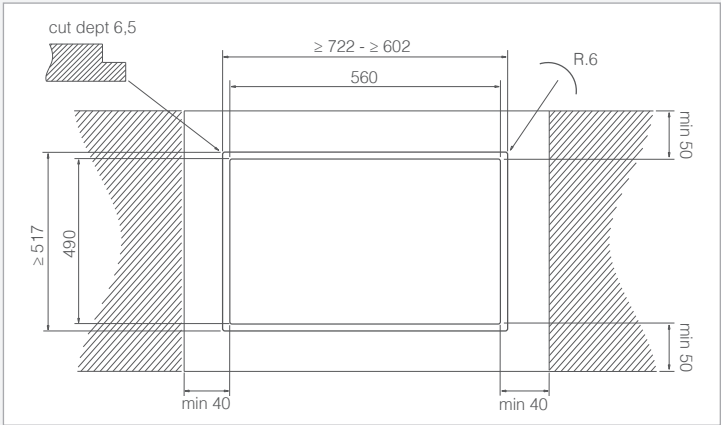


NIKOLATESLA FIT XL - PRIME S - PRIME PLUS S

Standard Installation

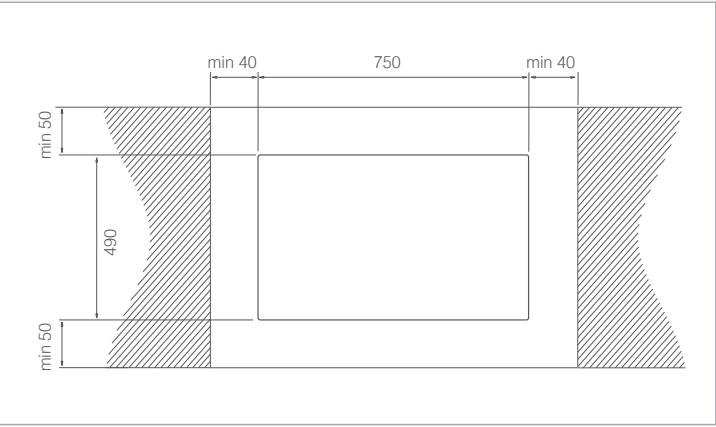


Flush Installation

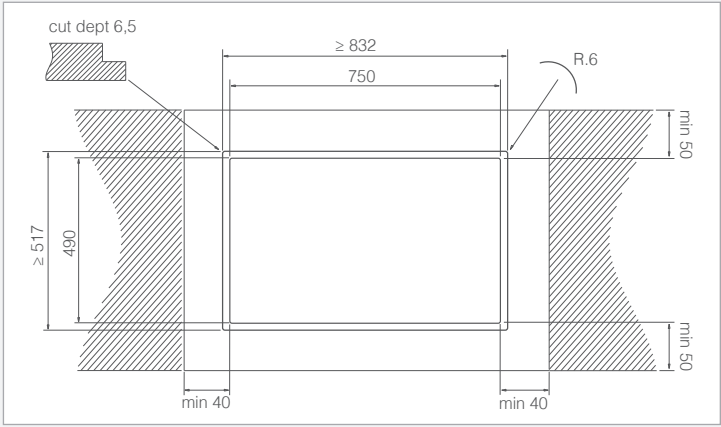


NIKOLATESLA FLAME

Standard Installation

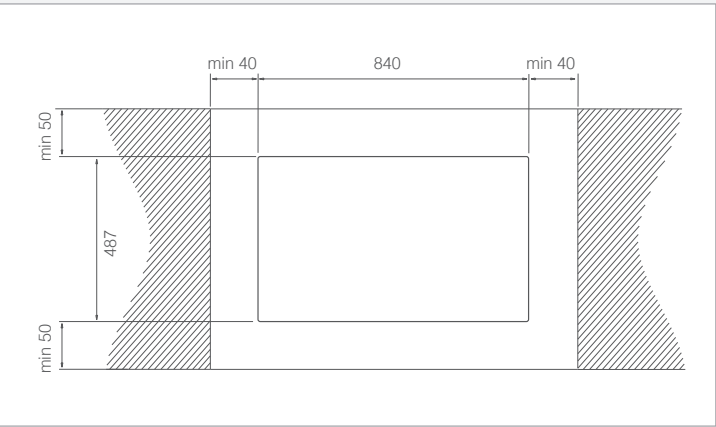


Flush Installation

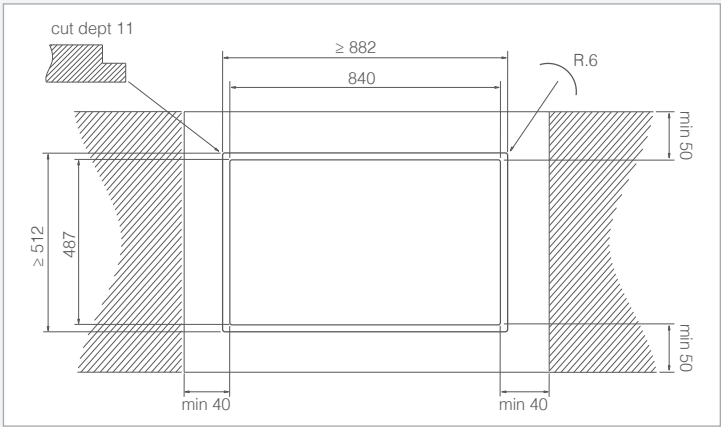


SYSTEM INSTALLATION

NIKOLATESLA ONE - ONE HP

Standard Installation

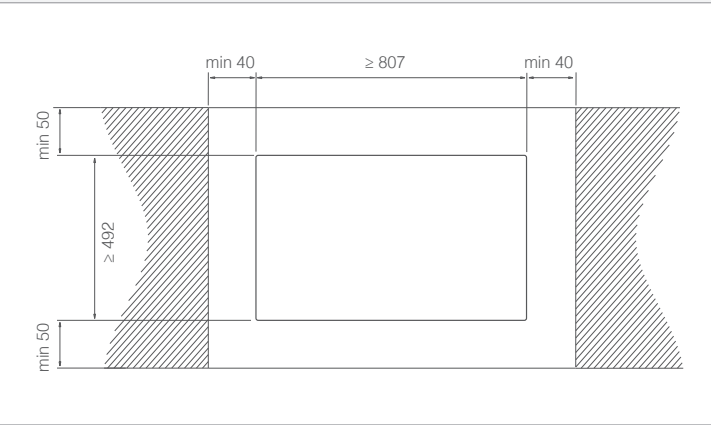


Flush Installation

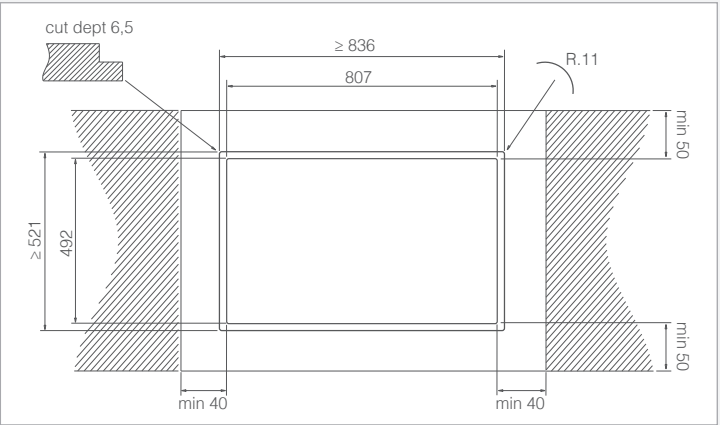


NIKOLATESLA SWITCH - SWITCH GLOW - LIBRA

Standard Installation

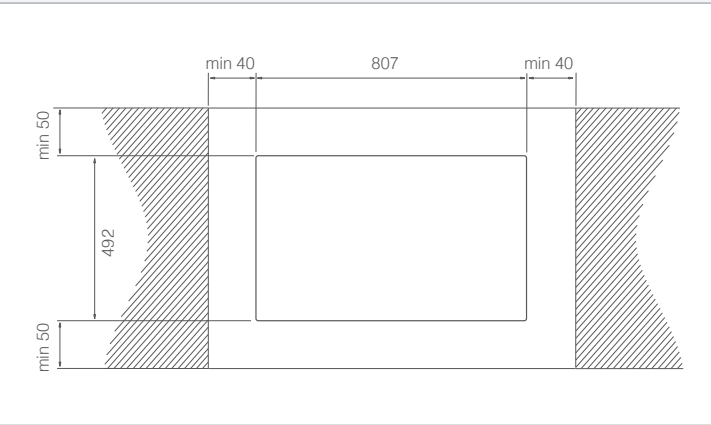


Flush Installation

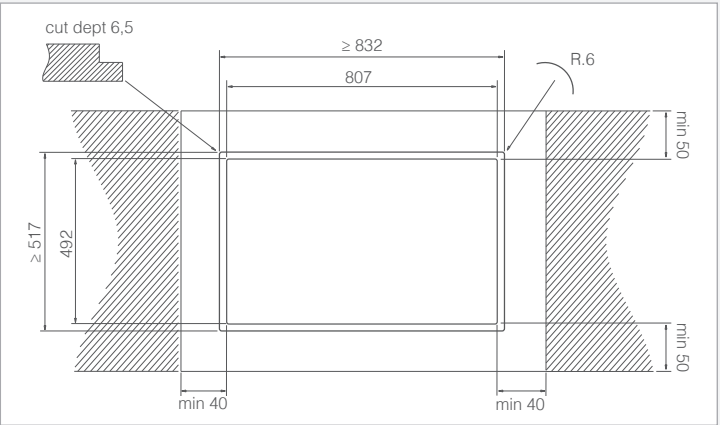


NIKOLATESLA UNPLUGGED

Standard Installation

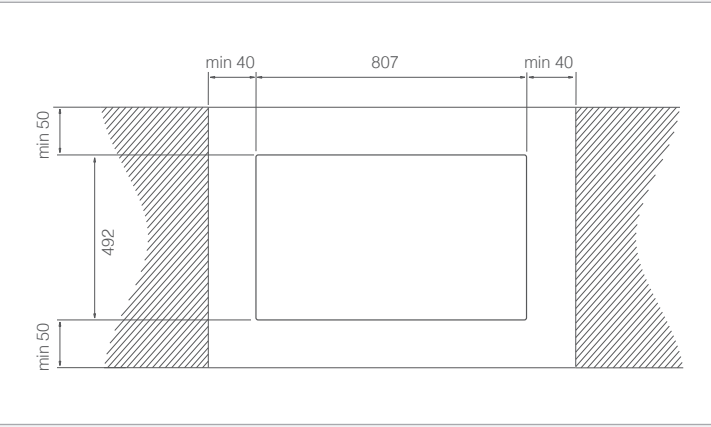

Flush Installation

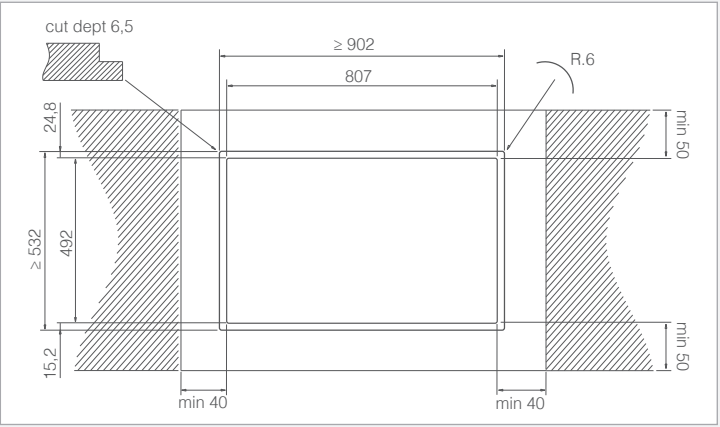



IKONA MAXXI PURE

DESIGN FABRIZIO CRISÀ



IKONA MAXXI PURE


DESIGN FABRIZIO CRISÀ **ELICA AIR PURE**

120 x 44 cm
Duct-out / Re-circulating
Stainless steel, black soft touch effect

LIGHTING	
Type	Strip LED 1x7 W
Intensity	365 LUX
Temperature	3500 K

EXTRACTION PERFORMANCE (MOTOR 1)	
Controls	Electronic Push Button
Speeds	3 + boost
Booster airflow	600 m³/h
Noise level min-max	47 - 62 dBA
Total absorption	207 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included

ACCESSORIES	
Black chimney kit	KIT0175017
Stainless steel chimney kit	KIT0175018
Stainless steel wall installation kit	KIT0175807
Black wall installation kit	KIT0175808
Extension cable kit (5m)	KIT0147942
Extension cable kit (2,5m)	KIT0147941

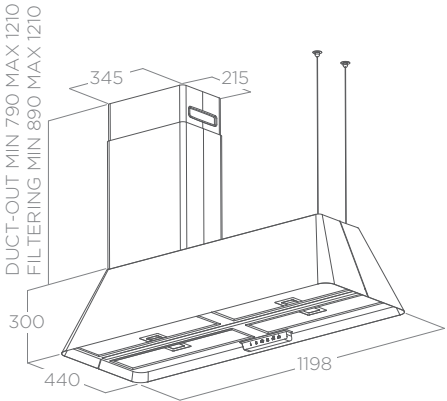

PURIFICATION PERFORMANCE (MOTOR 2)	
Controls	Electronic Push Button
Speeds	2
For room up to	30 m²
Noise level min-max	37 - 66 dBA
Total absorption	175 W
Hepa-Charcoal filter	Included
Filtered particles	Dust/dust mites, animal dander, pollens, molds, cigarettes smoke, stoves combustibles, formaldehyde (paintings and coating), cooking odours.

MODELS	
IKONA MAXXI PURE Black	PRF0171195
IKONA MAXXI PURE Stainless steel	PRF0171196

The motor of the hood and purifier can be activated from a dedicated interface and operate alternately to each other. The chimney, available as an accessory for recirculating and duct-out versions, can be installed above the hood motor, either on the right or left.

FOCUS ON IKONA MAXXI PURE

A multifunctional product that looks after indoor air

Ikona Maxxi Pure incorporates a hood and air purifier. It has been designed to improve the quality of domestic air without needing to install additional devices or complex monitoring systems. The hood and purifier operate independently, without compromising either performance or usability. The “hood core” of Ikona Maxxi Pure efficiently eliminates cooking fumes and vapours. Alternatively, by activating the purifier, the air in the living area can be cleaned of allergens and pollutants helping create an atmosphere of well-being and tranquility throughout the day.



Super-silent air purification



Ikona Maxxi Pure is able to completely purify the air in a 30m² space in just 20 minutes. The air purifier is fitted with a special combined HEPA-carbon filter and can capture particles as small as 1 micron. It has two operating modes: “Boost” for intensive air cleaning, and “Super Silent”, perfect for silently purifying the room, working in the background.

COMBO PURE FILTER (HEPA-CARBON)

The special Combo Pure Filter, a combined HEPA and carbon filter, captures polluting agents, freeing the living area of unpleasant odours and allergens such as dust, animal hair, pollen, mould, and harmful residues produced by household detergents, paints and coverings. To maintain the efficiency of air purification, the filter must be replaced approximately once a year. Ikona Maxxi Pure will remind you to change it through an alert on the user interface to ensure the air you breaths is always healthy.

A design that adapts to any living space



The timeless design of Ikona Maxxi Pure easily adapts to any open space area. The product is available in soft matt black or stainless steel finishes. It can be installed in a re-circulating or duct-out mode, suspended or wall-mounted. The attractive flue, available as an accessory, can be positioned either the right or left of the hood.





NUANCE

DESIGN FABRIZIO CRISÀ



75 cm
Duct-out / Re-circulating
Customisable stainless steel finish with drywall (not included),
stainless steel + paintable white

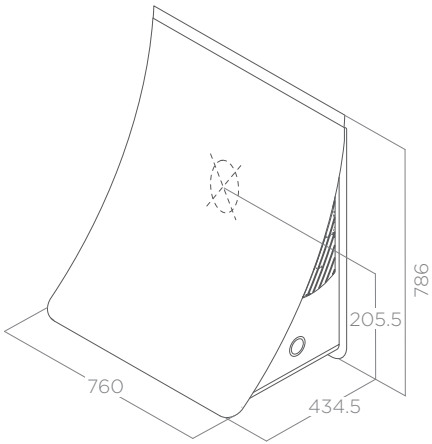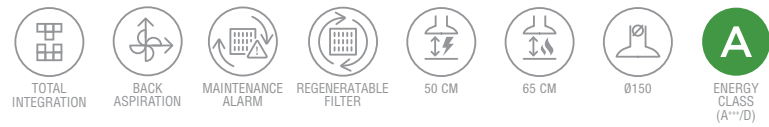

These unique models can be customised to suit the kitchen design. Two versions are available; drywall which takes 6mm dry wall plasterboard (not included) and can be decorated exactly as the kitchen walls, and paintable steel.

LIGHTING	
Type	Strip LED 1x7 W
Intensity	141 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic rotary
Speeds	3 + boost
Booster airflow	580 m³/h
Noise level min-max	49 - 62 dBA
Total absorption	227 W
Aluminium grease filter	Included
Charcoal filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0162221
MODELS	
NUANCE DRYWALL	PRF0096484
NUANCE PAINTABLE	PRF0098374





YIN

DESIGN FABRIZIO CRISÀ



66x42 cm
Duct-out / Re-circulating
White cristalplant

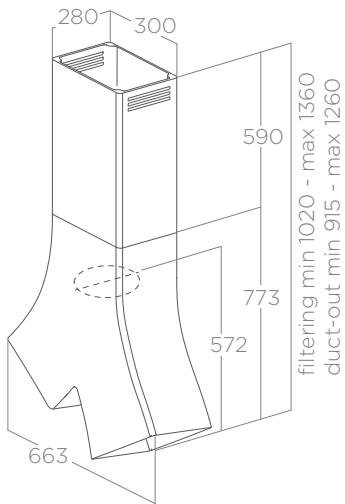

Crystalplant is a hypoallergic material that is scratch resistant and tactile. Any surface damage is easily removed with the special abrasive pad supplied.

LIGHTING	
Type	LED 2x4 W
Intensity	609 LUX
Temperature	4000 K
SPECIFICATION	
Controls	Remote control
Speeds	3 + boost
Booster airflow	625 m³/h
Noise level min-max	45 - 61 dBA
Total absorption	268 W
Stainless steel grease filter	Included
White remote control	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0141737
MODELS	
YIN	PRF0098375B



RULES



DESIGN FABRIZIO CRISÀ



RULES

DESIGN FABRIZIO CRISA

60 - 90 - 120 cm
Duct-out / Re-circulating
Black glass, "Sirius" black Dekton, customisable

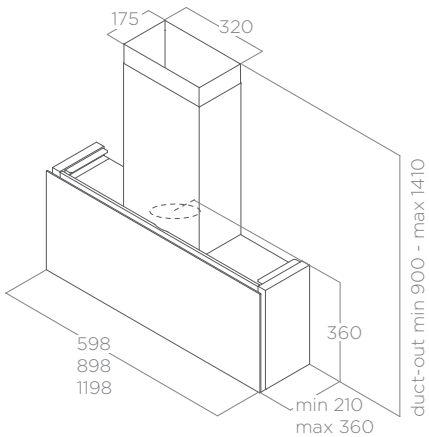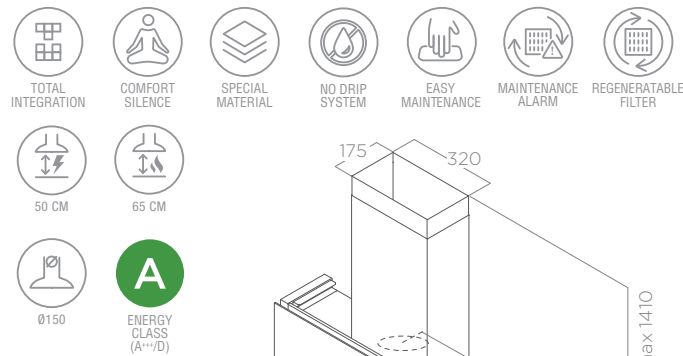

The CUSTOMISABLE version of Rules is a unique model that can be personalised to suit customer needs. It can be finished with the same material used for your kitchen. The images shown are only an example of the possible solutions.




LIGHTING		
Type	STRIP LED 2x4.2 W (DEKT - CUSTOMISABLE) STRIP LED 1x7 W (BL)	
Intensity	365 (BL) - 310 (DEKT-CUSTOMISABLE) LUX	
Temperature	3500 K	
SPECIFICATION		
Controls	BLACK GLASS	DEKTON / CUSTOMISABLE
Speeds	Capacitive Touch Control	Electronic push button
Booster airflow	3 + boost	3 + boost
Noise level min-max	700 m³/h	700 m³/h
Total absorption	40 - 58 dBA	40 - 58 dBA
Aluminium grease filter	277 W	280 W
Regeneratable charcoal filter	Included	Included
	Included	Included
ACCESSORIES		
Stainless steel chimney kit		KIT0171543
Black chimney kit		KIT0166364
MODELS		
RULES 60 Black		PRF0163752
RULES 60 Dekton		PRF0163755
RULES 60 Customisable		PRF0163758
RULES 90 Black		PRF0163751
RULES 90 Dekton		PRF0163754
RULES 90 Customisable		PRF0163757
RULES 120 Black		PRF0163753
RULES 120 Dekton		PRF0163756
RULES 120 Customisable		PRF0163759



APLOMB

DESIGN FABRIZIO CRISA

60 - 90 cm
Duct-out / Re-circulating
Black glass, white glass

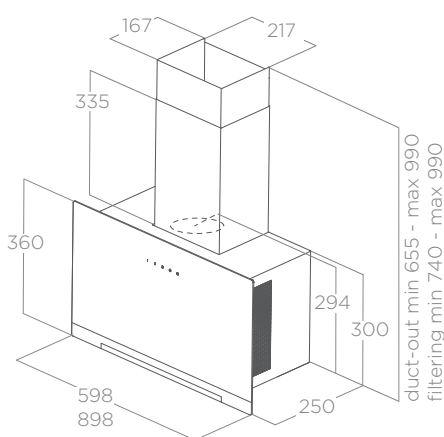

The extraction surface of the hood is distributed in three zones, directly over the hob and on the two sides, in order to guarantee the best fume capture.

LIGHTING	
Type	STRIP LED 1x3 W
Intensity	84 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive Touch Control
Speeds	3 + boost
Booster airflow	680 m³/h
Noise level min-max	51 - 64 dBA
Total absorption	233 W
Aluminium grease filter	Included
Chimney	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	PRF0162221
Re-circulating kit 1st installation	KIT0160286
MODELS	
APLOMB 60 Black	PRF0166938
APLOMB 60 White	PRF0166940
APLOMB 90 Black	PRF0166939
APLOMB 90 White	PRF0166941



SUPER PLAT
DESIGN FABRIZIO CRISÀ

Wall Mounted





SUPER PLAT

ELICA CONNECT

DESIGN FABRIZIO CRISÀ



80 cm
Duct-out / Re-circulating
Black glass, grey glass + cast iron effect

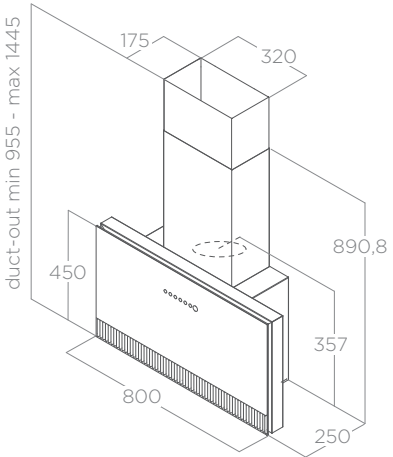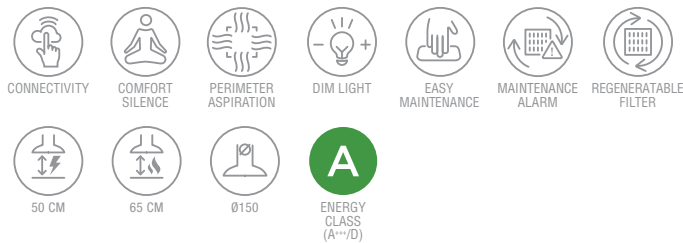

Ultra slim and highly effective. As well as conventional touch controls SUPER PLAT can be controlled by the Elica App or by voice assistant. Inline with latest kitchen trends Elica has developed new combinations of finishes for the ultimate urban chic.


LIGHTING	
Type	Strip LED 1x7 W
Intensity	197 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive Touch Control
Speeds	3 + 2 boost
Booster airflow	740 m³/h
Noise level min-max	37 - 57 dBA
Total absorption	277 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included
ACCESSORIES	
Stainless steel chimney kit	KIT0171543
Black chimney kit	KIT0166364
MODELS	
SUPER PLAT Black	PRF0164980
SUPER PLAT Grey	PRF0165017



PLAT

DESIGN FABRIZIO CRISÀ

55 - 80 cm
Duct-out / Re-circulating
Black glass, white glass

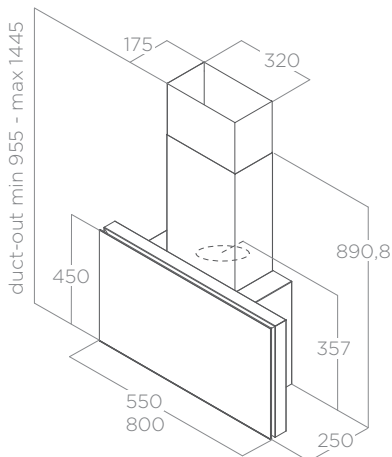

The front panel may be opened to increase vapor and odour capture, during particularly intensive cooking sessions.

LIGHTING	
Type	STRIP LED 1x7 W
Intensity	365 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive Touch Control
Speeds	3 + boost
Booster airflow	710 m³/h
Noise level min-max	37 - 57 dBA
Total absorption	277 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included
ACCESSORIES	
Stainless steel chimney kit	KIT0171543
Black chimney kit	KIT0166364
MODELS	
PLAT 55 Black	PRF0164946
PLAT 55 White	PRF0165707
PLAT 80 Black	PRF0164874
PLAT 80 White	PRF0165712

BLOOM LUX

DESIGN FABRIZIO CRISÀ

Wall Mounted





BLOOM LUX

DESIGN FABRIZIO CRISÀ

85 cm
Duct-out / Re-circulating
White glass, "Sirius" black Dekton

COMFORT SILENCE

SPECIAL MATERIAL

EASY MAINTENANCE

MAINTENANCE ALARM

REGENERATABLE FILTER


BACK ASPIRATION

45 CM

55 CM

Ø150

ENERGY CLASS (A+++/D)

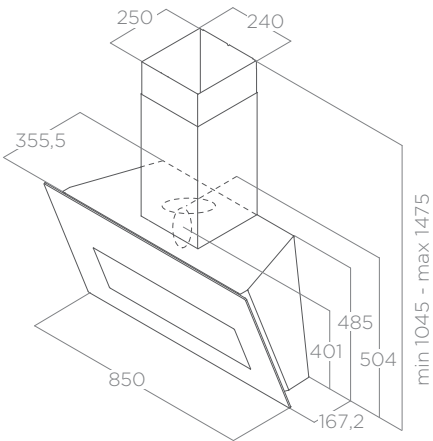

Combining elegance and performance. Open the flap for increased fume capture during cooking - close when you have finished.

LIGHTING	
Type	STRIP LED 1x7 W
Intensity	253 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Infrared Touch Control
Speeds	3 + 2 boost
Booster airflow	750 m³/h
Noise level min-max	35 - 53 dBA
Total absorption	277 W
Aluminium grease filter	Included
Chimney	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
MODELS	
BLOOM LUX White	PRF0164490
BLOOM LUX Dekton	PRF0164475



BLOOM

DESIGN FABRIZIO CRISÀ

85 cm
Duct-out / Re-circulating
Black glass, grey glass

COMFORT SILENCE

EASY MAINTENANCE

MAINTENANCE ALARM

REGENERATABLE FILTER


BACK ASPIRATION

45 CM

55 CM

Ø150

ENERGY CLASS (A+++/D)

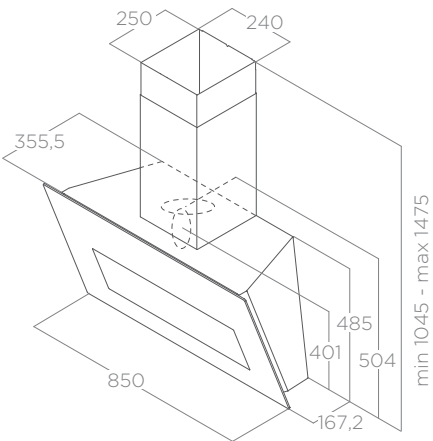

Combining elegance and performance. Open the flap for increased fume capture during cooking - close when you have finished.



LIGHTING	
Type	STRIP LED 1x7 W
Intensity	253 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive Touch Control
Speeds	3 + boost
Booster airflow	750 m³/h
Noise level min-max	35 - 56 dBA
Total absorption	277 W
Aluminium grease filter	Included
Chimney	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
MODELS	
BLOOM Black	PRF0164459
BLOOM Grey	PRF0164462



ASCENT

ELICA DESIGN CENTER

60 - 80 - 90 cm
Duct-out / Re-circulating
Black glass, white glass

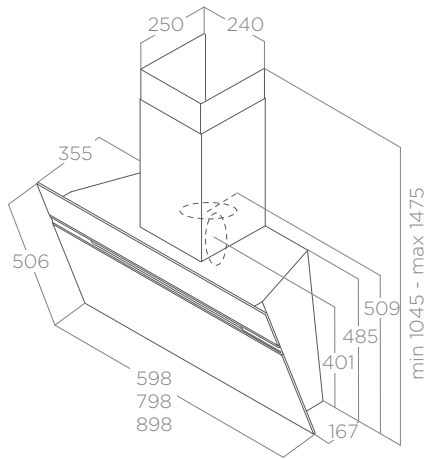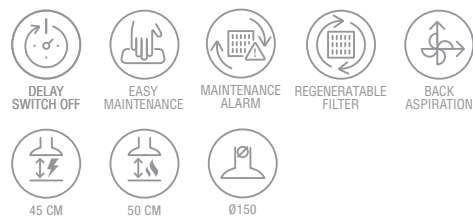

LIGHTING	
Type	LED 2x2,5 W
Intensity	203 LUX
Temperature	3000 K

SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	757 m³/h
Noise level min-max	50 - 65 dBA
Total absorption	265 W
Aluminium grease filter	Included
Chimney	Included

ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221



MODELS	
ASCENT 60 Black	PRF0101142B
ASCENT 60 White	PRF0101144B
ASCENT 80 Black	PRF0164806
ASCENT 80 White	PRF0164805
ASCENT 90 Black	PRF0101143B
ASCENT 90 White	PRF0101145B



ASCENT URBAN

ELICA DESIGN CENTER

90 cm
Duct-out / Re-circulating
Cast iron effect metal, zinc coating effect metal

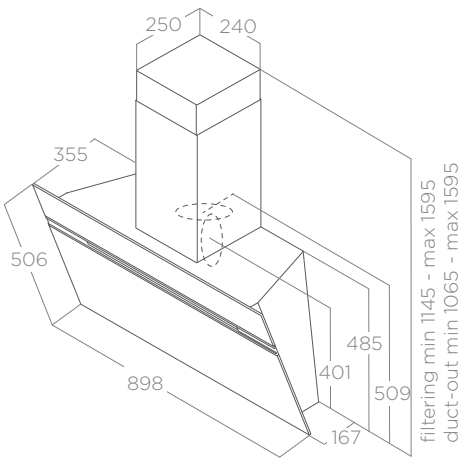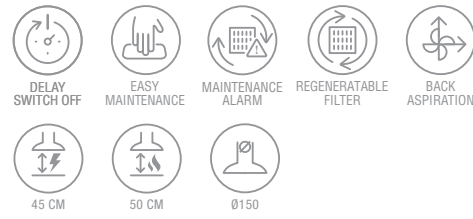

LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500 K

SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	757 m³/h
Noise level min-max	50 - 65 dBA
Total absorption	265 W
Aluminium grease filter	Included
Chimney	Included

ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221

MODELS	
ASCENT URBAN Zinc	PRF0147739
ASCENT URBAN Cast Iron	PRF0147738





In line with latest kitchen trends, where industrial and urban design is continuously gaining ground, Elica has developed new combinations of finishes allowing the hood to be perfectly integrated with this style.



MAJESTIC NO DRIP

DESIGN FABRIZIO CRISÀ

60 - 90 cm
Duct-out / Re-circulating
Black glass + stainless steel

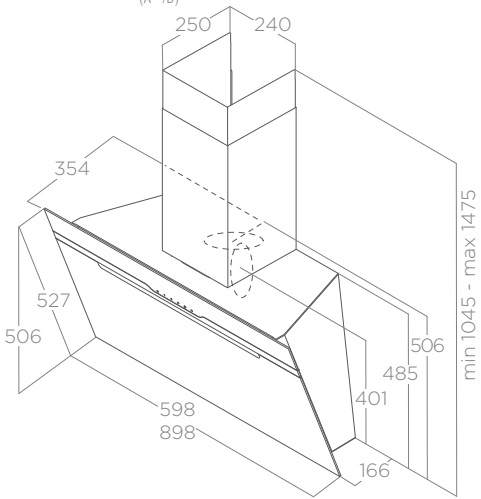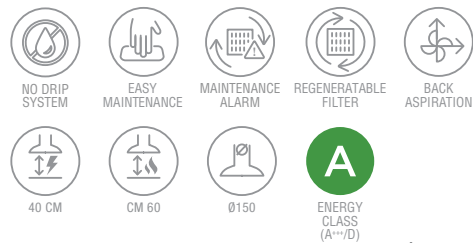


LIGHTING	
Type	Strip LED 1x7 W
Intensity	253 LUX
Temperature	3500 K

SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	600 m³/h
Noise level min-max	46 - 60 dBA
Total absorption	207 W
Aluminium grease filter	Included
Chimney	Included

ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
White remote control	KIT0121468
Black remote control	KIT0121469

MODELS	
MAJESTIC NO DRIP 60	PRF0147731
MAJESTIC NO DRIP 90	PRF0147732



 **NO DRIP** – Condensation can be a problem in kitchens with induction hobs. As these hobs only heat the pans there is no rising warmth to warm the glass of any cooker hoods so condensation can form. With the NO DRIP function the glass panel is warmed (just as in a cars rear windscreen) preventing condensation and any condensation on the internal components is collected in a removeable drip tray.




HAIKU

DESIGN FABRIZIO CRISÀ

60 - 90 - 120 cm
Duct-out / Re-circulating
Black glass, white Krion, stainless steel

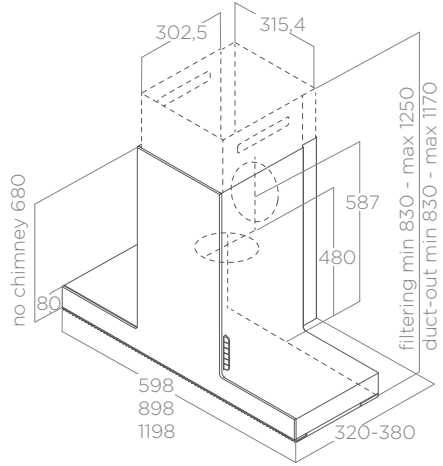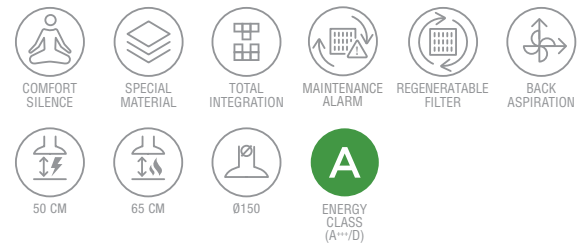

 With its SHIFT 3238 system Haiku can be installed flush with almost any depth of wall cabinet. Dispensing with the upper chimney section Haiku has a minimum height of only 680mm which is really useful in kitchens with low ceilings.

LIGHTING	
Type	Strip LED 1x7 W
Intensity	253 LUX
Temperature	3500 K

SPECIFICATION	
Controls	Electronic push button
Speeds	3 +2 boost
Booster airflow	690 m³/h
Noise level min-max	34 - 51 dBA
Total absorption	277 W
Aluminium grease filter	Included

ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A

MODELS	
HAIKU 60 Stainless steel	PRF0146255
HAIKU 60 Black	PRF0146264
HAIKU 60 White	PRF0146268
HAIKU 90 Stainless steel	PRF0146256
HAIKU 90 Black	PRF0146265
HAIKU 90 White	PRF0146269
HAIKU 120 Stainless steel	PRF0146257
HAIKU 120 Black	PRF0146266
HAIKU 120 White	PRF0146270







HAIKU 32

DESIGN FABRIZIO CRISÀ



32 cm
Duct-out / Re-circulating
Black glass, white Krion, stainless steel

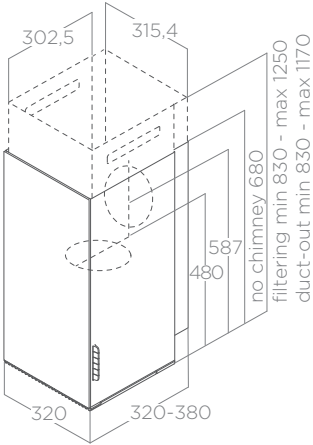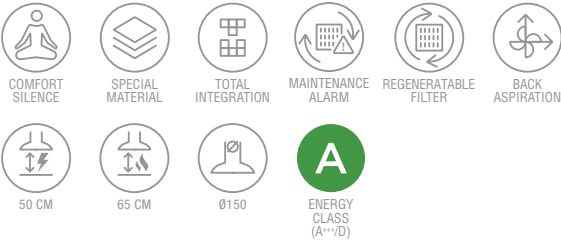

LIGHTING	
Type	Strip LED 1x7 W
Intensity	253 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + 2 boost
Booster airflow	690 m³/h
Noise level min-max	34 - 51 dBA
Total absorption	277 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
MODELS	
HAIKU 32 Stainless steel	PRF0146254
HAIKU 32 Black	PRF0146263
HAIKU 32 White	PRF0146267

Dispensing with the upper chimney section Haiku has a minimum height of only 680mm which is really useful in kitchens with low ceilings.



THIN
DESIGN FABRIZIO CRISÀ



THIN

DESIGN FABRIZIO CRISÀ

60 - 70 - 90 - 120 cm
Duct-out / Re-circulating
Stainless steel

COMFORT
SILENCE

MAINTENANCE
ALARM

REGENERATABLE
FILTER

BACK
ASPIRATION

50 CM

65 CM

Ø150


ENERGY
CLASS
(A+++/D)

LIGHTING	
Type	Strip LED 1x7 W
Intensity	477 LUX
Temperature	3500 K

SPECIFICATION	
Controls	Infrared touch control
Speeds	3 + 2 boost
Booster airflow	680 m³/h
Noise level min-max	34 - 52 dBA
Total absorption	277 W
Aluminium grease filter	Included

ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A

MODELS	
THIN 60	PRF0144970
THIN 70	PRF0144971
THIN 90	PRF0144969
THIN 120	PRF0144972

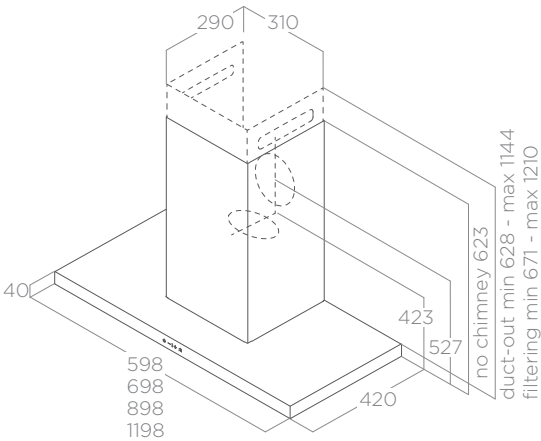

ADÉLE2

DESIGN FABRIZIO CRISÀ

60 - 90 cm
Duct-out / Re-circulating
Stainless steel + black glass, black soft touch effect + black glass

EASY
MAINTENANCE

MAINTENANCE
ALARM


REGENERATABLE
FILTER

50 CM

65 CM

Ø150

ENERGY
CLASS
(A+++/D)

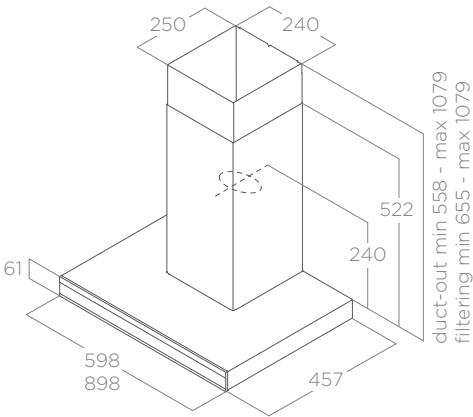

LIGHTING	
Type	STRIP LED 1x7 W
Intensity	421 LUX
Temperature	3000 K

SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	770 m³/h
Noise level min-max	55 - 69 dBA
Total absorption	277 W
Aluminium grease filter	Included

ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
Black chimney extension kit H81	KIT0181149

MODELS	
ADÉLE2 60 Stainless steel + black glass	PRF0181770
ADÉLE2 60 Black matt + black glass	PRF0182412
ADÉLE2 90 Stainless steel + black glass	PRF0181765
ADÉLE2 90 Black matt + black glass	PRF0182410




ADÉLE2
DESIGN FABRIZIO CRISÀ



GALAXY

ELICA DESIGN CENTER

80 cm
Duct-out / Re-circulating
Stainless steel + black glass, stainless steel + white glass


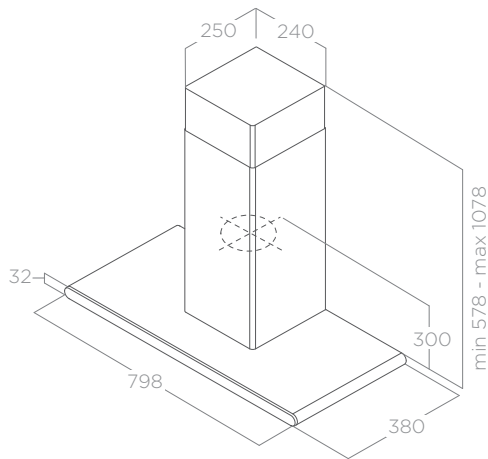


LIGHTING	
Type	LED 2x2,5 W
Intensity	145 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	647 m³/h
Noise level min-max	52 - 71 dBA
Total absorption	265 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
MODELS	
GALAXY Stainless steel + black	PRF0008948B
GALAXY Stainless steel + white	PRF0009822B

BIO

DESIGN FABRIZIO CRISÀ

90 cm
Duct-out / Re-circulating
Natural oak + white soft touch effect

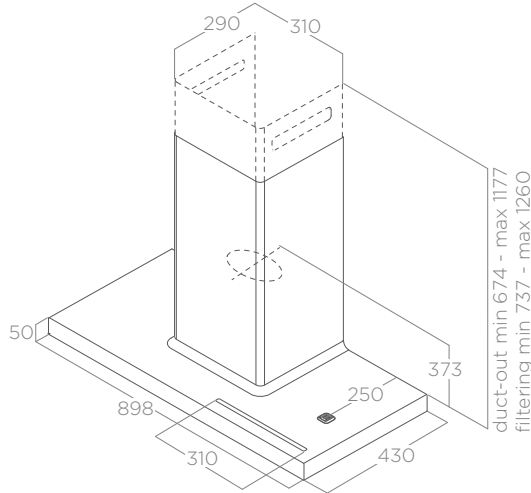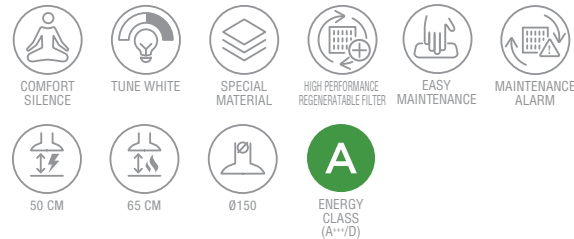

Bio has a unique combination of natural oak and soft white finishes. The hood has a support and USB charge point for a tablet or phone – the perfect place to display your recipe.



LIGHTING	
Type	Strip LED 1x7 W
Intensity	113 LUX
Temperature	2700 - 6500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 +2 boost
Booster airflow	720 m³/h
Noise level min-max	35 - 58 dBA
Total absorption	257 W
Aluminium grease filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0141725A
First installation HP filtering kit	KIT0160440
Regeneratable charcoal HP filter	CFC0140091
Oak wall shelf kit 60cm	KIT0120946
White remote control	KIT0121468
Black remote control	KIT0121469
MODELS	
BIO	PRF0147266




DOLCE

DESIGN FABRIZIO CRISÀ



85 cm
Duct-out / Re-circulating
Painted: matt white, matt umber, ivory, matt copper, peltrox, cast iron

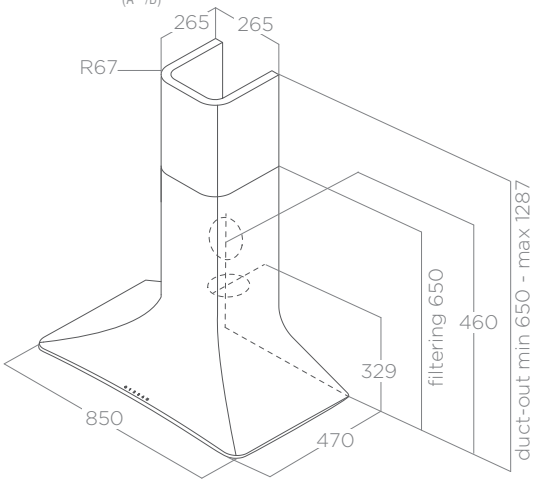

The use of engineering plastics makes it possible to create the soft contours typical of the Dolce design.

LIGHTING	
Type	Strip LED 1x7 W
Intensity	197 LUX
Temperature	4000 K
SPECIFICATION	
Controls	Infrared touch control
Speeds	3 + boost
Booster airflow	580 m³/h
Noise level min-max	46 - 61 dBA
Total absorption	207 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included (*)
Chimney extension	Included (Duct-out only)

ACCESSORIES	
Regeneratable charcoal filter	CFC0140426



MODELS		
	Duct-out with chimney extension	Re-circulating without chimney extension (*)
DOLCE White	PRF0167320	PRF0043030A
DOLCE UMBER	PRF0167321	PRF0043031A
DOLCE Ivory	PRF0167322	PRF0043033A
DOLCE Copper	PRF0167324	
DOLCE Peltrox	PRF0167323	
DOLCE Cast iron	PRF0167319	



METEORITE

DESIGN FABRIZIO CRISÀ

90 - 120 cm
Duct-out / Re-circulating
Stainless steel + black glass

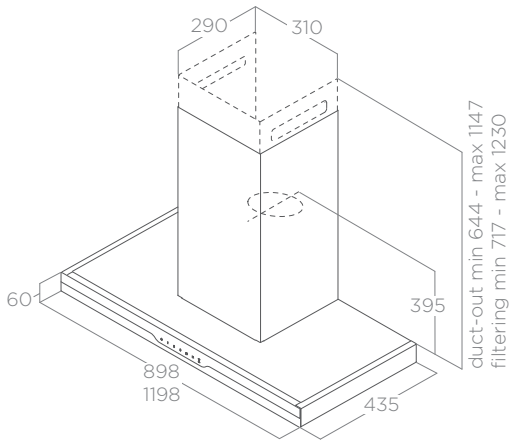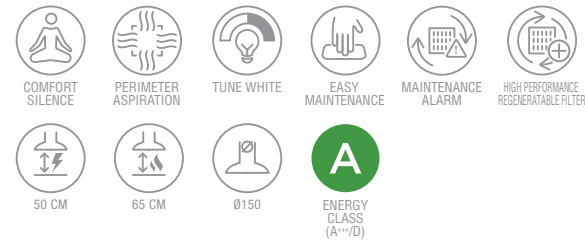

LIGHTING	
Type	Strip LED 1x7 W
Intensity	113 LUX
Temperature	2700 - 6500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 +2 boost
Booster airflow	700 m³/h
Noise level min-max	32 - 56 dBA
Total absorption	257 W
Aluminium grease filter	Included

ACCESSORIES	
Regeneratable charcoal filter	CFC0141725A
Regeneratable charcoal filter HP	CFC0140091
First installation HP filtering kit	KIT0160440

MODELS	
METEORITE 90	PRF0147272
METEORITE 120	PRF0147273



SHY 60 White



SHY 90 Black



SHY

DESIGN FABRIZIO CRISA

60 - 90 cm
Duct-out / Re-circulating
Black glass, white glass

DELAY SWITCH OFF

EASY MAINTENANCE

MAINTENANCE ALARM


REGENERATABLE FILTER

45 CM

65 CM

Ø150

ENERGY CLASS (A+++/D)

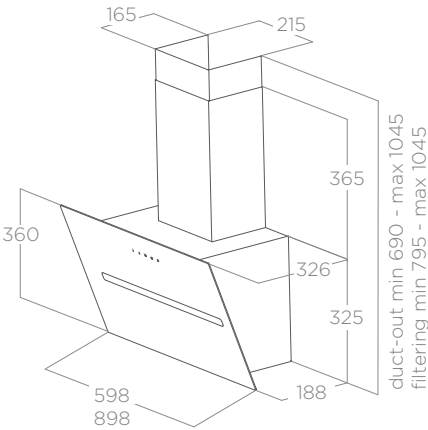

LIGHTING	
Type	LED 2x1,5 W
Intensity	180 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	650 m³/h
Noise level min-max	52 - 65 dBA
Total absorption	233 W
Aluminium grease filter	Included
Chimney	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Re-circulating kit 1st installation	KIT0160286
MODELS	
SHY 60 Black	PRF0166932
SHY 60 White	PRF0166934
SHY 90 Black	PRF0166933
SHY 90 White	PRF0166935



IO AIR

ELICA DESIGN CENTER

75 cm
Duct-out / Re-circulating
White glass, black glass

PERIMETER ASPIRATION

EASY MAINTENANCE

MAINTENANCE ALARM

REGENERATABLE FILTER


BACK ASPIRATION

45 CM

55 CM

Ø150

ENERGY CLASS (A+++/D)

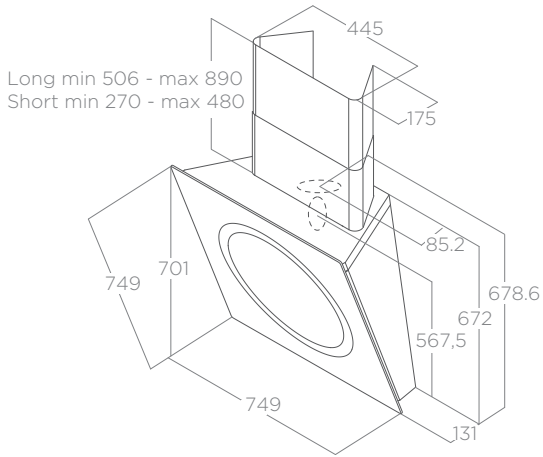

LIGHTING	
Type	Strip LED 1x7 W
Intensity	421 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	700 m³/h
Noise level min-max	52 - 62 dBA
Total absorption	257 W
Aluminium grease filter	Included
Charcoal filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0162221
Long chimney kit	KIT0010439
Short chimney kit	KIT0010700
MODELS	
IO AIR Black	PRF0094744
IO AIR White	PRF0094734

Upon activation, the center ring electronically moves inwards, allowing perimeter suction.






ALPHA

DESIGN FABRIZIO CRISÀ

60 - 90 cm
Duct-out / Re-circulating
Embossed black

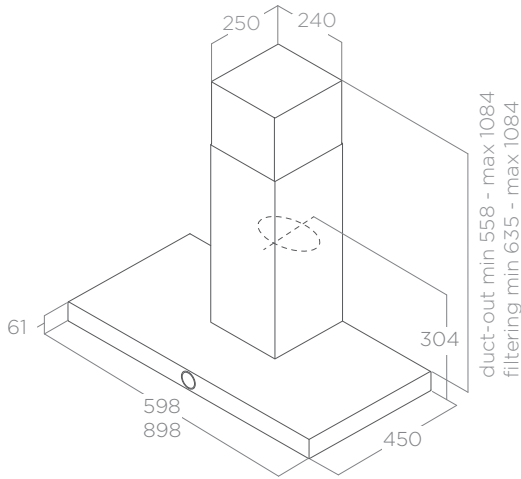


LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic rotative
Speeds	3 + boost
Booster airflow	620 m³/h
Noise level min-max	52 - 67 dBA
Total absorption	205 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
MODELS	
ALPHA 60 Black	PRF0097782A
ALPHA 90 Black	PRF0097906A



AQUATIVAE 2.0

ELICA DESIGN CENTER

50 - 60 - 90 cm
Duct-out / Re-circulating
Stainless steel

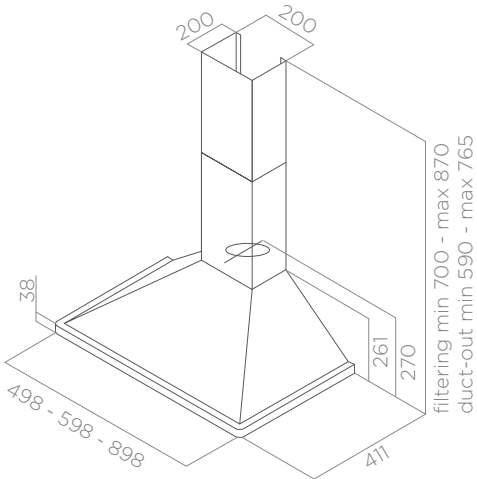



LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
SPECITICATION	
Controls	Mechanical push button
Speeds	3
Booster airflow	435 m³/h
Noise level min-max	56 - 65 dBA
Total absorption	118 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable filter	CFC0162221
MODELS	
AQUAVITAE2 50	PRF0184126
AQUAVITAE2 60	PRF0184149
AQUAVITAE2 90	PRF0184156



CRUISE

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Stainless steel

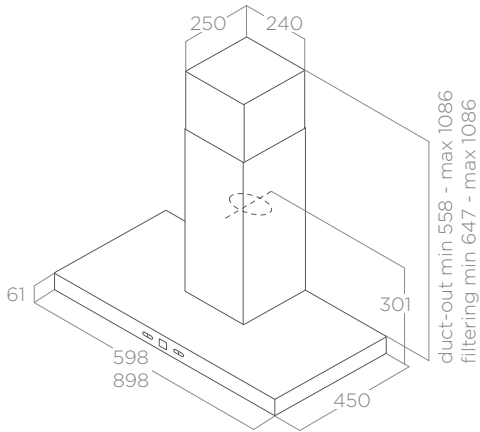



LIGHTING	
Type	LED 2x2,5 W
Intensity	145 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button with display
Speeds	3 + boost
Booster airflow	713 m³/h
Noise level min-max	51 - 69 dBA
Total absorption	265 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
MODELS	
CRUISE 60	PRF0147062
CRUISE 90	PRF0147074



TAMAYA 2.0

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Stainless steel

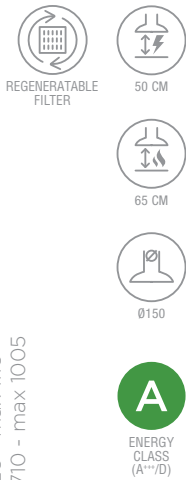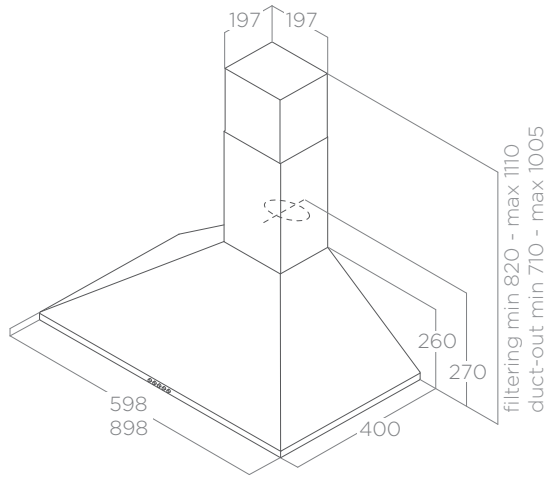


LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500K
SPECIFICATION	
Controls	Mechanical push button
Speeds	3 + boost
Max airflow	750 m³/h
Noise level min-max	52 - 68 dBA
Total absorption	255 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
MODELS	
TAMAYA 2.0 60	PRF0176778
TAMAYA 2.0 90	PRF0176781



REEF A

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Stainless steel + glass

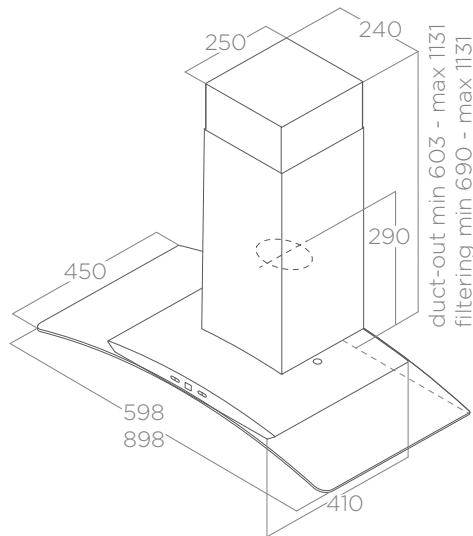



LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3000 K
SPECIFICATION	
Controls	Electronic push button with display
Speeds	3 + boost
Booster airflow	600 m³/h
Noise level min-max	48 - 64 dBA
Total absorption	205 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
MODELS	
REEF A 60	PRF0150289
REEF A 90	PRF0150288



TRIBE A

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Stainless steel + glass

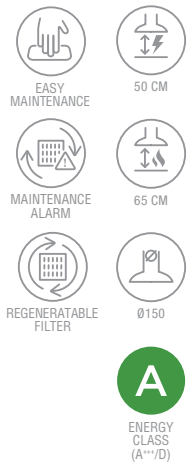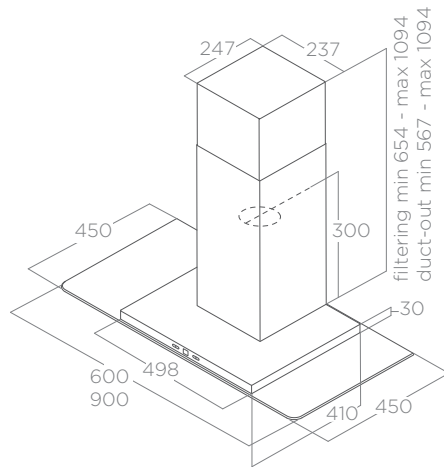



LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3000 K
SPECIFICATION	
Controls	Electronic push button with display
Speeds	3 + boost
Booster airflow	600 m³/h
Noise level min-max	48 - 64 dBA
Total absorption	205 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
MODELS	
TRIBE A 60	PRF0150292
TRIBE A 90	PRF0150291



STONE

ELICA DESIGN CENTER

Ø33 cm
Duct-out / Re-circulating
Stainless steel, white

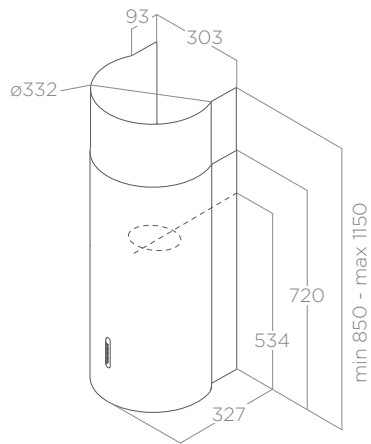


LIGHTING	
Type	LED 2x2,5 W
Intensity	457 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Soft light push button
Speeds	3
Max airflow	559 m³/h
Noise level min-max	44 - 67 dBA
Total absorption	180 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
MODELS	
STONE Stainless steel	61412862B
STONE White	PRF0007123A



TONDA

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Stainless steel

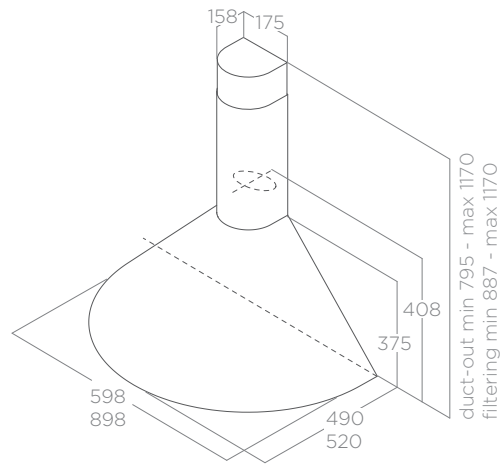


LIGHTING	
Type	LED 2x3 W
Intensity	97 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Mechanical slider
Speeds	3
Max airflow	355 m³/h
Noise level min-max	60 - 67 dBA
Total absorption	146 W
Aluminium grease filter	Included
Charcoal filter	Included
MODELS	
TONDA 60	2938000C
TONDA 90	2937999C



ACUTA

ELICA DESIGN CENTER

100 cm
Duct-out / Re-circulating
Stainless steel

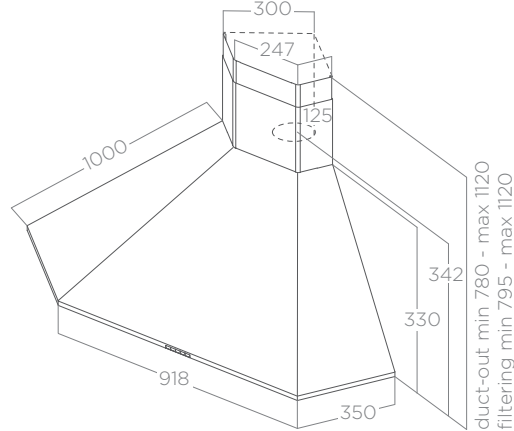

LIGHTING	
Type	LED 4x2,5 W
Intensity	441 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	625 m³/h
Noise level min-max	46 - 60 dBA
Total absorption	210 W
Aluminium grease filter	Included
Charcoal filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0162221
MODELS	
ACUTA Stainless steel	PRF0121267A

THIN ISLAND

DESIGN FABRIZIO CRISÀ



THIN ISLAND

DESIGN FABRIZIO CRISÀ

120x57 cm
Duct-out / Re-circulating
Stainless steel

COMFORT
SILENCE

MAINTENANCE
ALARM


REGENERATABLE
FILTER

50 CM

65 CM

Ø150

ENERGY
CLASS
(A+++/D)

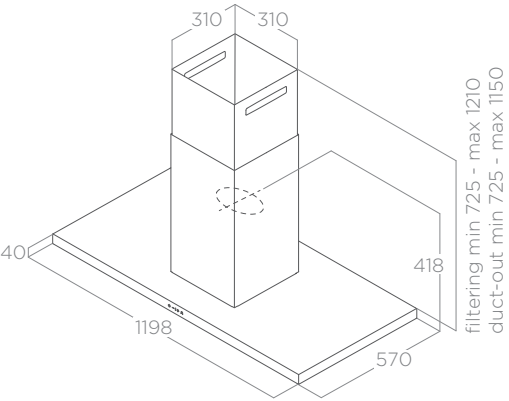

LIGHTING	
Type	Strip LED 2x7 W
Intensity	253 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Infrared touch control
Speeds	3 + 2 boost Infrared touch control
Booster airflow	680 m³/h
Noise level min-max	34 - 52 dBA
Total absorption	284 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
MODELS	
THIN ISLAND	PRF0144973



BIO ISLAND

DESIGN FABRIZIO CRISÀ

120x52 cm
Duct-out / Re-circulating
Natural oak + white soft touch effect

COMFORT
SILENCE

TUNE WHITE

SPECIAL
MATERIAL

HIGH PERFORMANCE
REGENERATABLE FILTER

EASY
MAINTENANCE


MAINTENANCE
ALARM

50 CM

65 CM

Ø150

ENERGY
CLASS
(A+++/D)

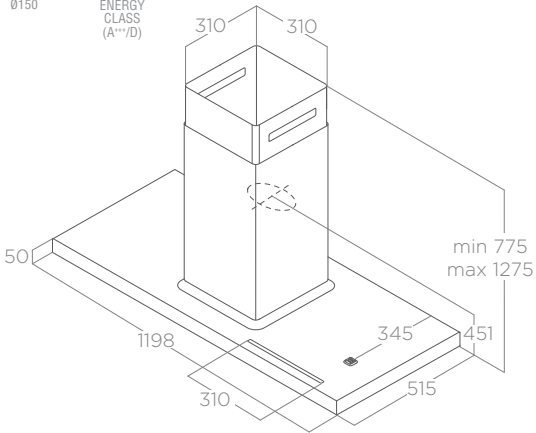

A unique combination of synthetic soft touch materials and a solid oak finish BIO ISLAND has and has an integrated support for tablets and smartphones, along with a double USB port just where you need to see a recipe displayed. The optional shelf adds design versatility.



LIGHTING	
Type	Strip LED 2x7 W
Intensity	113 LUX
Temperature	2700 - 6500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + 2 boost
Booster airflow	720 m³/h
Noise level min-max	35 - 58 dBA
Total absorption	257 W
Aluminium grease filter	Included
ACCESSORIES	
First installation HP filtering kit	KIT0160440
Regeneratable charcoal filter	CFC0141725A
Regeneratable charcoal HP filter	CFC0140091
Oak island shelf kit 60cm + 2 cables	KIT0120947
Cables shelf kit 2pcs (1,7m)	KIT0120948
White remote control	KIT0121468
Black Design remote control	KIT0121469
MODELS	
BIO ISLAND	PRF0148081

BIO ISLAND

DESIGN FABRIZIO CRISÀ





HAIKU ISLAND

DESIGN FABRIZIO CRISÀ

120x32 - 180x32 cm
Duct-out / Re-circulating
Black glass, white Krion, stainless steel

COMFORT
SILENCE

SPECIAL
MATERIAL

MAINTENANCE
ALARM


REGENERATABLE
FILTER

50 CM

65 CM

Ø150

ENERGY
CLASS
(A+++/D)

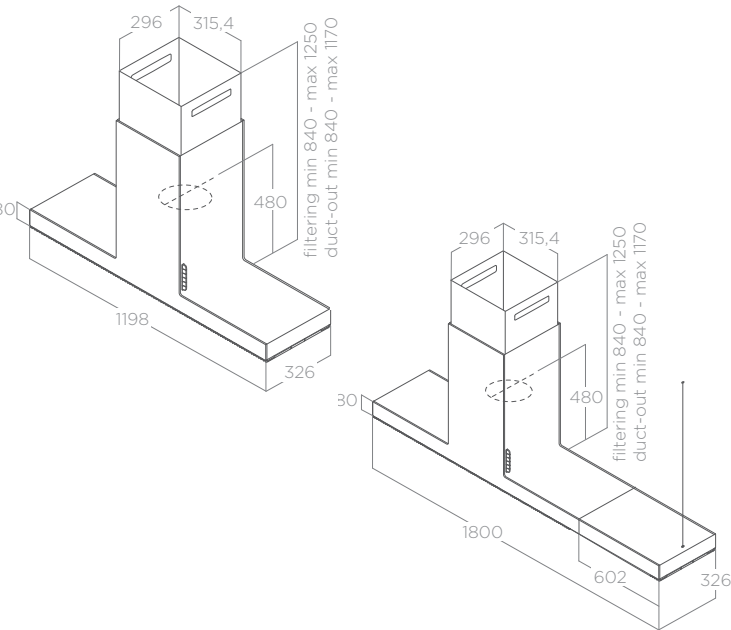

LIGHTING	
Type	Strip LED 1x7 W
Intensity	281 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + 2 boost
Booster airflow	690 m³/h
Noise level min-max	34 - 51 dBA
Total absorption	277 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
MODELS	
HAIKU ISLAND 120 Stainless steel	PRF0146279
HAIKU ISLAND 120 Black	PRF0146286
HAIKU ISLAND 120 White	PRF0146290
HAIKU ISLAND 180 Stainless steel	PRF0146280
HAIKU ISLAND 180 Black	PRF0146287
HAIKU ISLAND 180 White	PRF0146291



HAIKU ISLAND 32

DESIGN FABRIZIO CRISÀ

32x32 cm
Duct-out / Re-circulating
Black glass, white Krion, stainless steel

COMFORT
SILENCE

SPECIAL
MATERIAL

MAINTENANCE
ALARM


REGENERATABLE
FILTER

50 CM

65 CM

Ø150

ENERGY
CLASS
(A+++/D)

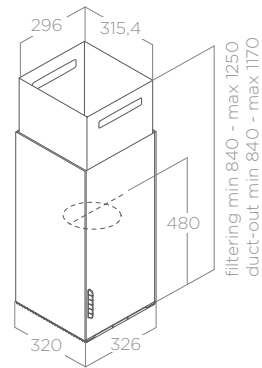

LIGHTING	
Type	Strip LED 1x7 W
Intensity	365 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + 2 boost
Booster airflow	690 m³/h
Noise level min-max	34 - 51 dBA
Total absorption	277 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
MODELS	
HAIKU ISLAND 32 Stainless steel	PRF0146277
HAIKU ISLAND 32 Black	PRF0146285
HAIKU ISLAND 32 White	PRF0146289



ADÉLE2 ISLAND

DESIGN FABRIZIO CRISÀ

90x60 cm
Duct-out / Re-circulating
Stainless steel + black glass, black soft touch effect + black glass

EASY MAINTENANCE

MAINTENANCE ALARM


REGENERATABLE FILTER

50 CM

65 CM

Ø150

ENERGY CLASS (A+++/D)

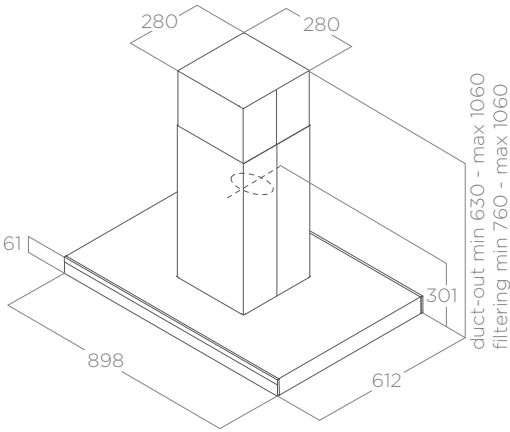


LIGHTING		
Type	Strip LED 2x7 W	
Intensity	309 LUX	
Temperature	3000 K	
SPECIFICATION		
Controls	Capacitive touch control	
Speeds	3 + boost	
Booster airflow	770 m³/h	
Noise level min-max	55 - 69 dBA	
Total absorption	277 W	
Aluminium grease filter	Included	
ACCESSORIES		
Charcoal filter		CFC0141529A
Regeneratable charcoal filter		CFC0141725A
Island installation extension kit H15 (false ceiling)		KIT01600
MODELS		
ADÉLE2 ISLAND Stainless steel + black glass		PRF0181761
ADÉLE2 ISLAND Black matt + black glass		PRF0182415



GALAXY ISLAND

ELICA DESIGN CENTER

90x45 cm
Duct-out / Re-circulating
Stainless steel + black glass, stainless steel + white glass

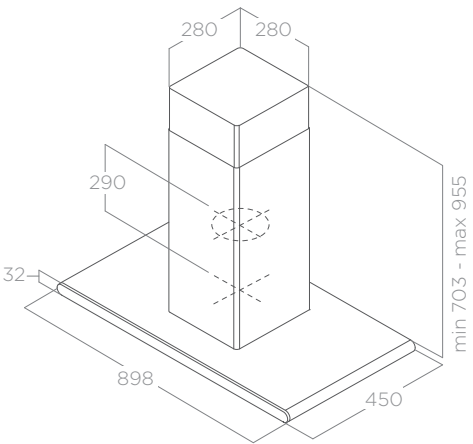

EASY MAINTENANCE

50 CM

DELAY SWITCH OFF

65 CM

MAINTENANCE ALARM

Ø150

REGENERATABLE FILTER


LIGHTING	
Type	LED 4x2,5 W
Intensity	290 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	647 m³/h
Noise level min-max	52 - 69 dBA
Total absorption	270 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600
MODELS	
GALAXY ISLAND Black + stainless steel	PRF0017852B
GALAXY ISLAND White + stainless steel	PRF0019192B



METEORITE ISLAND

DESIGN FABRIZIO CRISÀ

120x60 cm
Duct-out / Re-circulating
Stainless steel + black glass

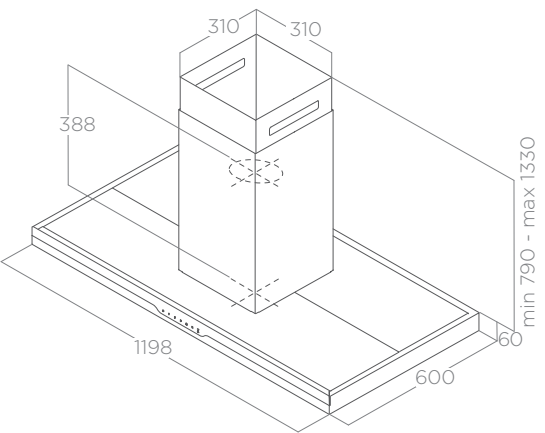

COMFORT SILENCE

50 CM

PERIMETER ASPIRATION

65 CM

TUNE WHITE

Ø150

EASY MAINTENANCE

MAINTENANCE ALARM

HIGH PERFORMANCE REGENERATABLE FILTER

ENERGY CLASS (A+++/D)


LIGHTING	
Type	Strip LED 2x7 W
Intensity	113 LUX
Temperature	2700 - 6500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + 2 boost
Booster airflow	700 m³/h
Noise level min-max	32 - 56 dBA
Total absorption	257 W
Aluminium grease filter	Included
ACCESSORIES	
First installation HP filtering kit	KIT0160440
Regeneratable charcoal filter	CFC0141725A
Regeneratable charcoal HP filter	CFC0140091
MODELS	
METEORITE ISLAND	PRF0148122



REEF A ISLAND

ELICA DESIGN CENTER

90x60 cm
Duct-out / Re-circulating
Stainless steel + glass

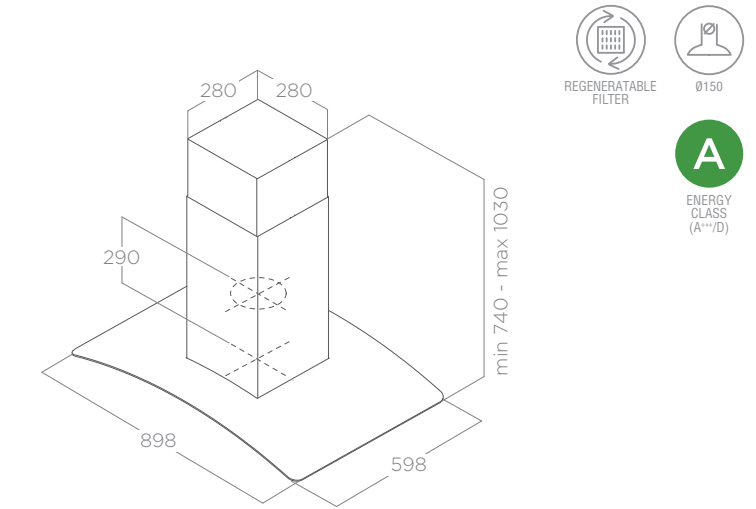


LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3000 K
SPECIFICATION	
Controls	Electronic push button with display
Speeds	3 + boost
Booster airflow	600 m³/h
Noise level min-max	48 - 64 dBA
Total absorption	205 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600
MODELS	
REEF A ISLAND	PRF0150290



TRIBE A ISLAND

ELICA DESIGN CENTER

90x60 cm
Duct-out / Re-circulating
Stainless steel + glass

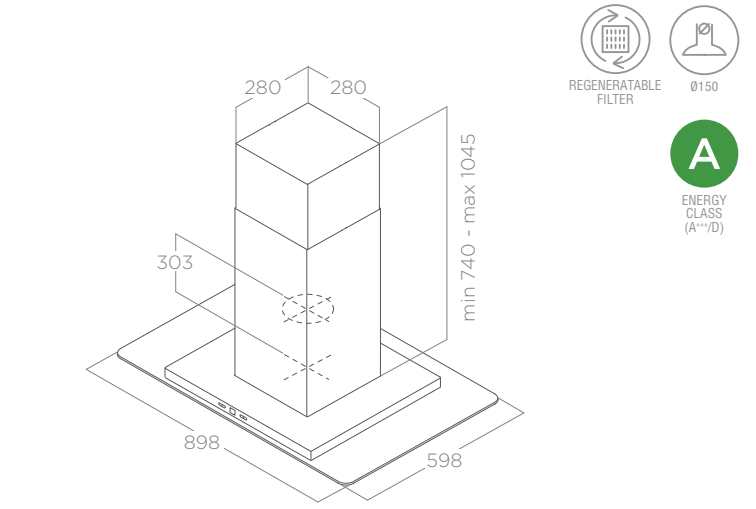


LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3000 K
SPECIFICATION	
Controls	Electronic push button with display
Speeds	3 + boost
Booster airflow	600 m³/h
Noise level min-max	48 - 64 dBA
Total absorption	205 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141529A
Regeneratable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600
MODELS	
TRIBE A ISLAND	PRF0150293




TUBE PRO ISLAND

ELICA DESIGN CENTER

Ø43 cm
Duct-out / Re-circulating
Stainless steel, black soft touch effect, white soft touch effect

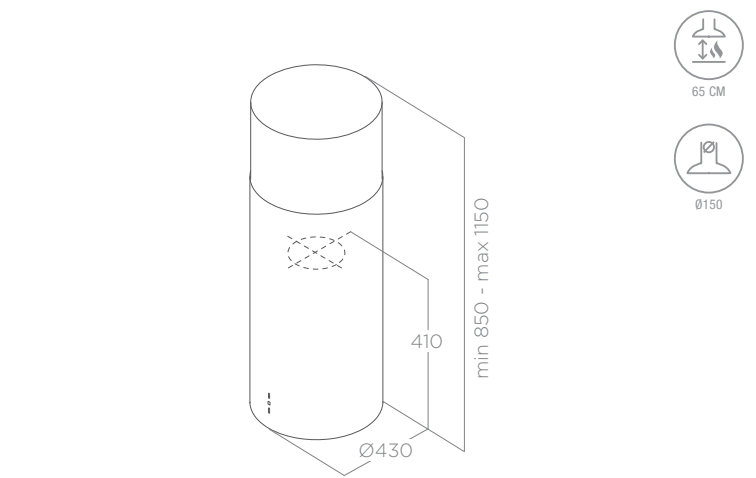

LIGHTING	
Type	LED 2x3 W
Intensity	457 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Mechanical push button
Speeds	3
Max airflow	603 m³/h
Noise level min-max	47 - 68 dBA
Total absorption	256 W
Aluminium grease filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0140423
Island installation extension kit H15 (false ceiling)	KIT01600
MODELS	
TUBE PRO ISLAND Stainless steel	PRF0044794B
TUBE PRO ISLAND Black	PRF0090717B
TUBE PRO ISLAND White	PRF0090718B

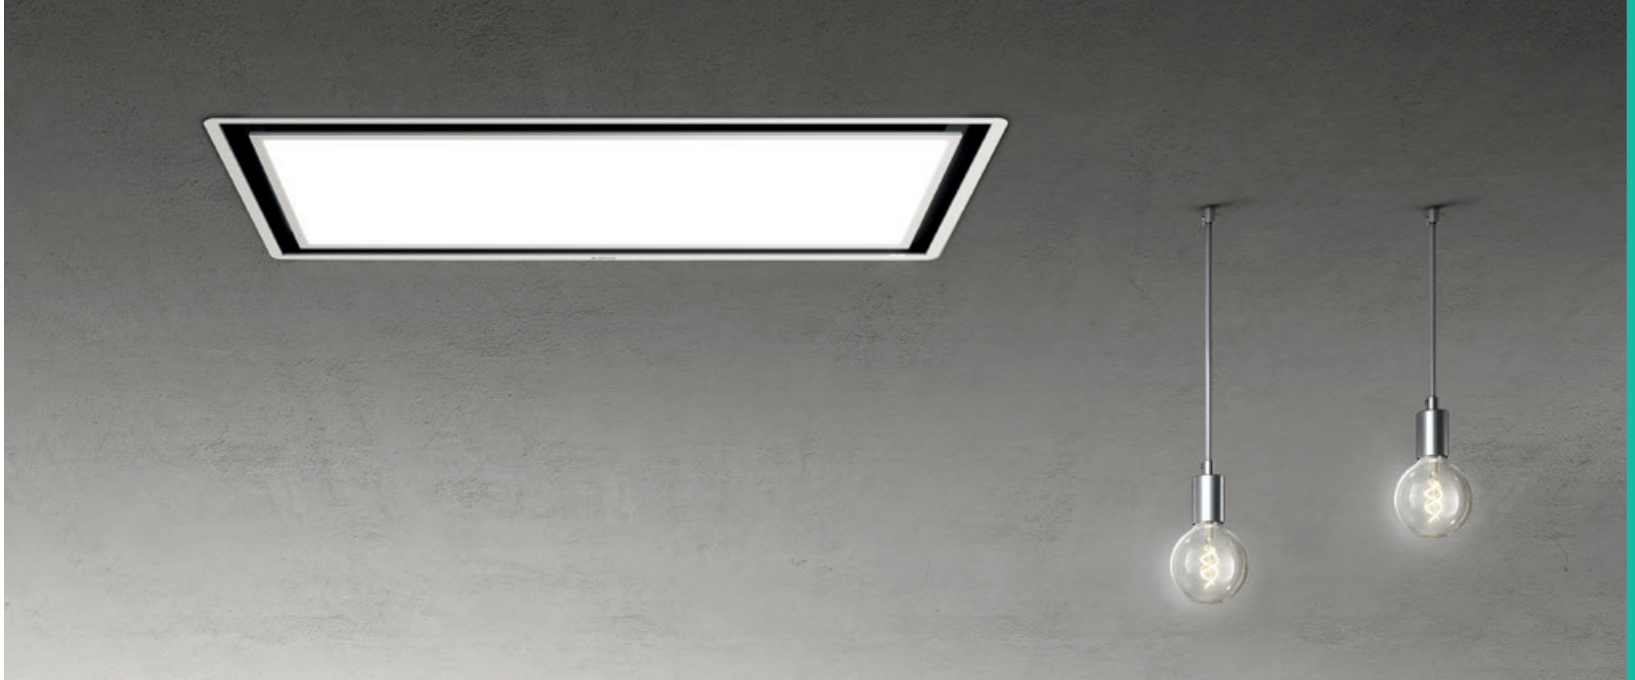

SKYDOME PLUS

DESIGN FABRIZIO CRISÀ

ELICA CONNECT


100x50 cm
Duct-out / Re-circulating
White frame



The exclusive slim H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels.


The brightness and tone of the light panel can be controlled by a wall-mounted switch or remote control and any commercially available light can be connected. With the Elica App, the hood can be operated via a smartphone or other device.

H16 - NO MOTOR

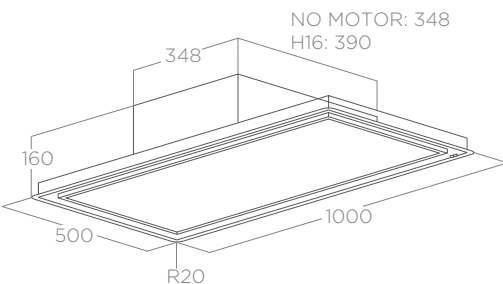

FALSE CEILING CUT 480X980

H30

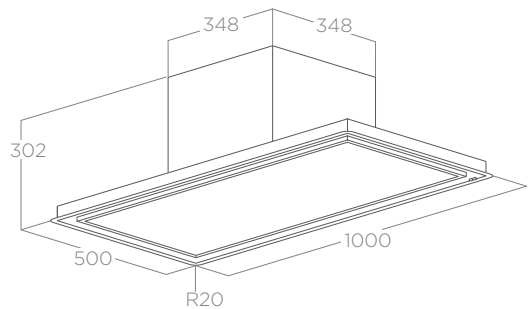

FALSE CEILING CUT 480X980



TOTAL
INTEGRATION



AIRMATIC



TUNE WHITE



DIM LIGHT



COMFORT
SILENCE



CONNECTIVITY



SUPER EASY
INSTALLATION



DELAY
SWITCH OFF



MAINTENANCE
ALARM



HIGH PERFORMANCE
REGENERATABLE FILTER



REGENERATABLE
FILTER



H16
31 KG



H30
34.10 KG



NO MOT
24.80 KG



0150



ENERGY
CLASS
A+++/D

LIGHTING

Type	LED Panel 28W
Intensity	1683 LUX
Temperature	2700 K - 5000 K

SPECIFICATION

Controls	Remote control	
Speeds	3 + 2 boost	
	H16	H30
Booster airflow	720 m³/h	770 m³/h
Noise level min-max	51 - 68 dBA	40 - 53 dBA
Total absorption	303 W	298 W
Duct size	222 x 89 mm (internal)	150 mm
Aluminium grease filter	Included	Included
Remote control	Included	Included

ACCESSORIES

On board filtering kit H30	KIT0148449
High performance first installation filtering kit H16-H30 Stainless steel	KIT0148450A
Regeneratable first installation filtering kit H16-H30 Stainless steel	KIT0167743
High performance first installation filtering kit H16-H30 White	KIT0181126
Regeneratable first installation filtering kit H16-H30 White	KIT0181117
Remote internal motor	KIT0184296
Remote external motor (wall)	KIT0184135
Remote external motor (roof)	KIT0147881
Remote external motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392
Ceiling hood dimmer kit	KIT0147878

MODELS

SKYDOME PLUS H16	PRF0147735B
SKYDOME PLUS H30	PRF0146232B
SKYDOME PLUS NO MOTOR	PRF0146230A

For remote motors specification see page 162
For optional recirculating kit see page 165

HILIGHT-X

DESIGN FABRIZIO CRISÀ






HILIGHT-X

DESIGN FABRIZIO CRISÀ

100x57 cm
Duct-out / Re-circulating
Stainless steel, white soft touch effect, black soft touch effect


The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels.

H16 - NO MOTOR

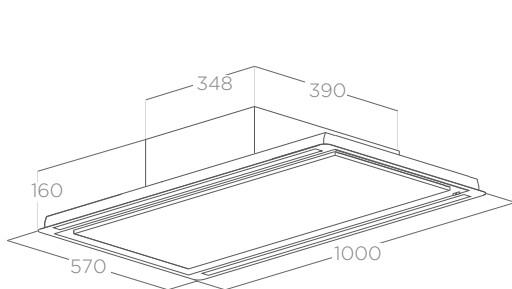

FALSE CEILING CUT 550X980

H30

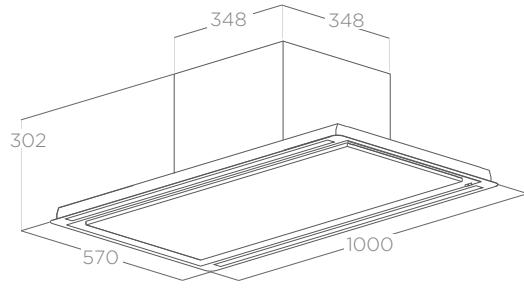

FALSE CEILING CUT 550X980




LIGHTING	
Type	Strip LED 2x7 W
Intensity	281 LUX
Temperature	3500 K

SPECIFICATION		
	H16	H30
Controls	Remote control	Remote control
Speeds	3 + 2 boost	3 + 2 boost
Booster airflow	720 m³/h	770 m³/h
Noise level min-max	51 - 68 dBA	42 - 58 dBA
Total absorption	189 W	184 W
Duct size	222 x 89 mm (internal)	150 mm
Aluminium grease filter	Included	Included
Remote control	Included	Included

ACCESSORIES		
On board filtering kit H30		KIT0148449
High performance first installation filtering kit H16-H30		KIT0148450A
Stainless steel		
Regeneratable first installation filtering kit H16-H30		KIT0167743
Stainless steel		
High performance first installation filtering kit H16-H30 White		KIT0181126
Regeneratable first installation filtering kit H16-H30 White		KIT0181117
High performance first installation filtering kit H16-H30 Black		KIT0181124
Regeneratable first installation filtering kit H16-H30 Black		KIT0180993
Remote internal motor		KIT0184296
Remote external motor (wall)		KIT0184135
Remote external motor (roof)		KIT0147881
Remote external motor (inclined roof)		KIT0147882
Extension lead for remote motor		KIT0161392
Ceiling hood dimmer kit		KIT0147878

MODELS	
HILIGHT-X NO MOTOR Stainless steel	PRF0163523
HILIGHT-X H16 Stainless steel	PRF0167045A
HILIGHT-X H16 White	PRF0173442A
HILIGHT-X H16 Black	PRF0173443A
HILIGHT-X H30 Stainless steel	PRF0163520A
HILIGHT-X H30 White	PRF0173444A
HILIGHT-X H30 Black	PRF0173445A

For remote motors specification see page 162
For optional recirculating kit see page 165

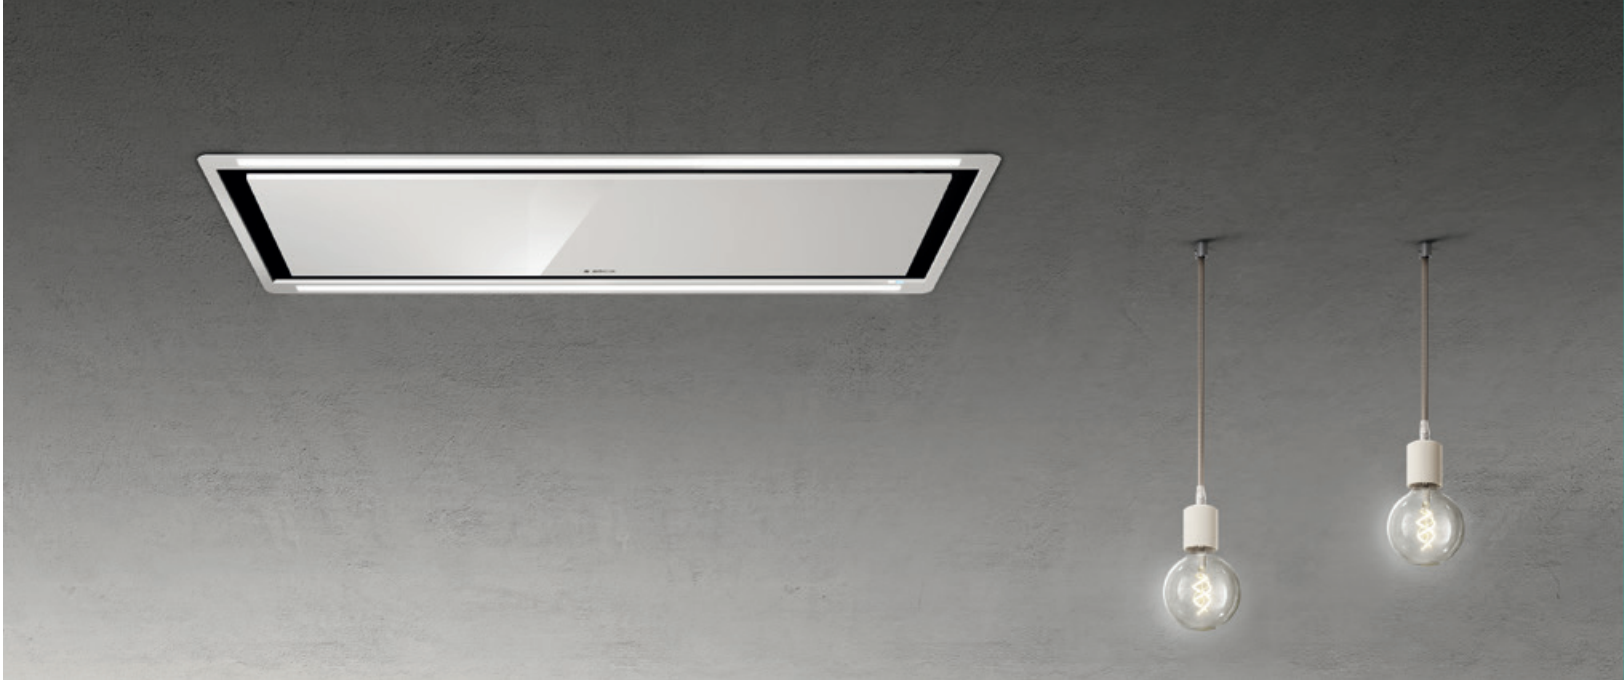


HILIGHT GLASS

DESIGN FABRIZIO CRISÀ

100x57 cm
Duct-out / Re-circulating
White glass + white frame


The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels. The brightness and tone of the light strips can be controlled by a wall-mounted switch or remote control and any commercially available light can be connected.

H16 - NO MOTOR

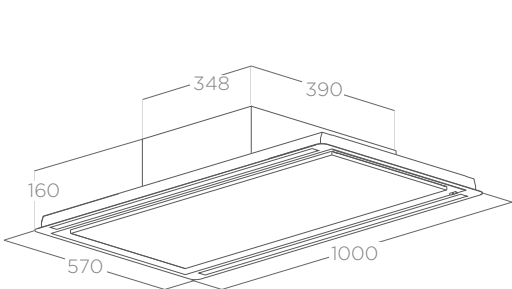

FALSE CEILING CUT 550X980

H30

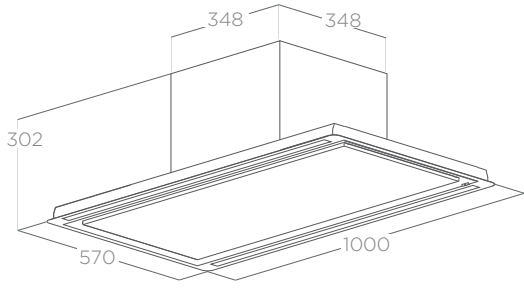

FALSE CEILING CUT 550X980



LIGHTING	
Type	Strip LED 2x14 W
Intensity	563 LUX
Temperature	2700 K - 5000 K

SPECIFICATION		
	H16	H30
Controls	Remote control	Remote control
Speeds	3 + 2 boost	3 + 2 boost
Booster airflow	720 m³/h	770 m³/h
Noise level min-max	51 - 68 dBA	40 - 53 dBA
Total absorption	303 W	298 W
Duct size	222 x 89 mm (internal)	150 mm
Aluminium grease filter	Included	Included
Remote control	Included	Included

For remote motors specification see page 162
For optional recirculating kit see page 165


ACCESSORIES		
On board filtering kit H30		KIT0148449
High performance first installation filtering kit H16-H30		KIT0148450A
Stainless steel		
Regeneratable first installation filtering kit H16-H30		KIT0167743
Stainless steel		
High performance first installation filtering kit H16-H30 White		KIT0181126
Regeneratable first installation filtering kit H16-H30 White		KIT0181117
Remote internal motor		KIT0184296
Remote external motor (wall)		KIT0184135
Remote external motor (roof)		KIT0147881
Remote external motor (inclined roof)		KIT0147882
Extension lead for remote motor		KIT0161392
Ceiling hood dimmer kit		KIT0147878

MODELS	
HILIGHT GLASS H16	PRF0167044A
HILIGHT GLASS H30	PRF0146246A
HILIGHT GLASS NO MOTOR	PRF0146248

ILLUSION PLUS

DESIGN FABRIZIO CRISÀ



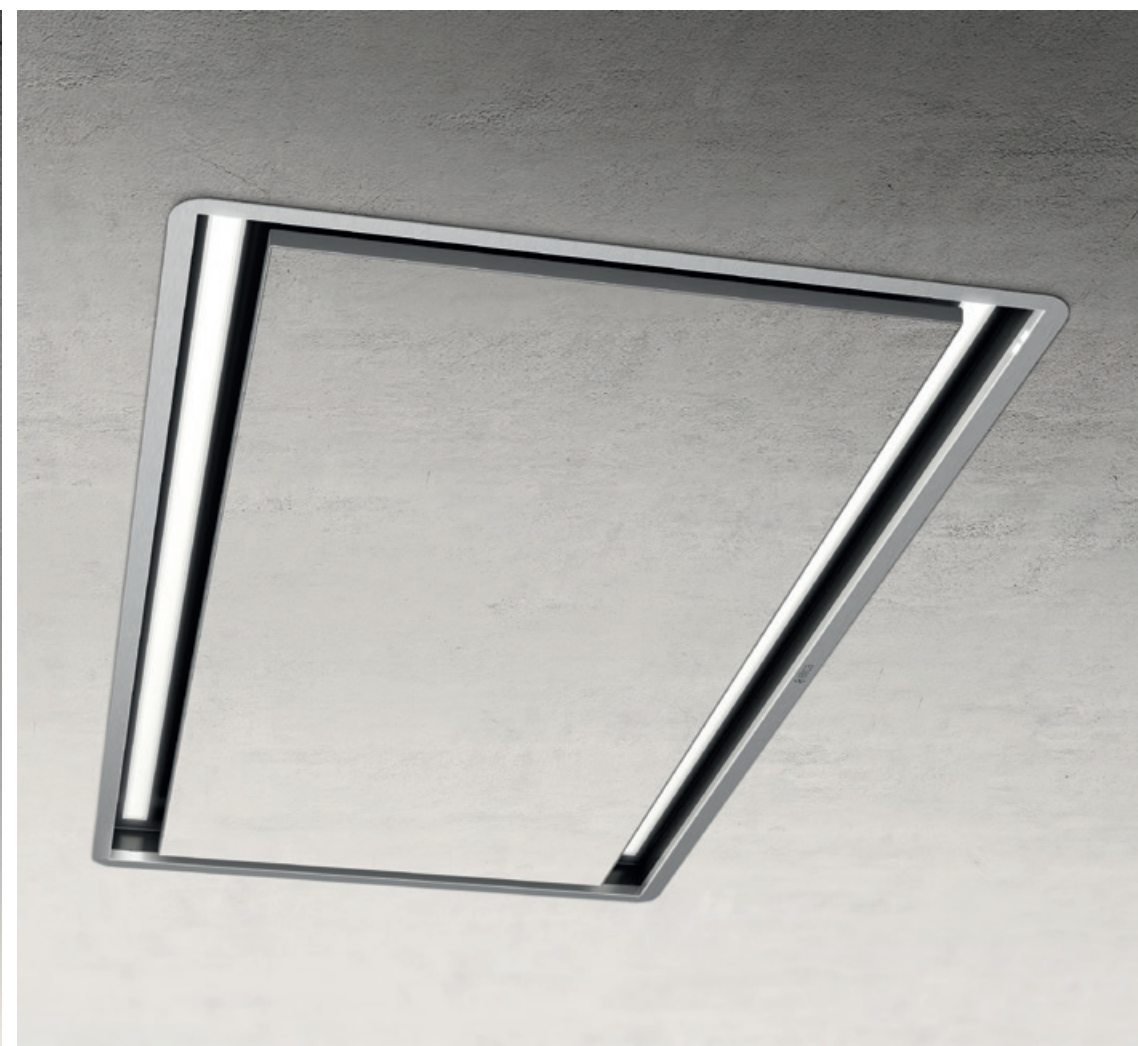



ILLUSION PLUS

DESIGN FABRIZIO CRISÀ

ELICA CONNECT

100x50 cm
Duct-out / Re-circulating
White soft touch effect + white soft touch frame,
customisable with drywall (not included) + stainless steel
frame, black soft touch effect + black soft touch frame
(H16 & H30 only)

Unique and customisable the model can be finished like the ceiling. The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels and any commercially available light can be connected. With the Elica App, the hood can be operated via a smartphone or other device,

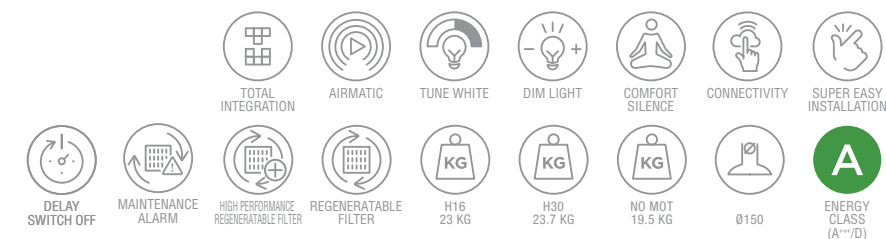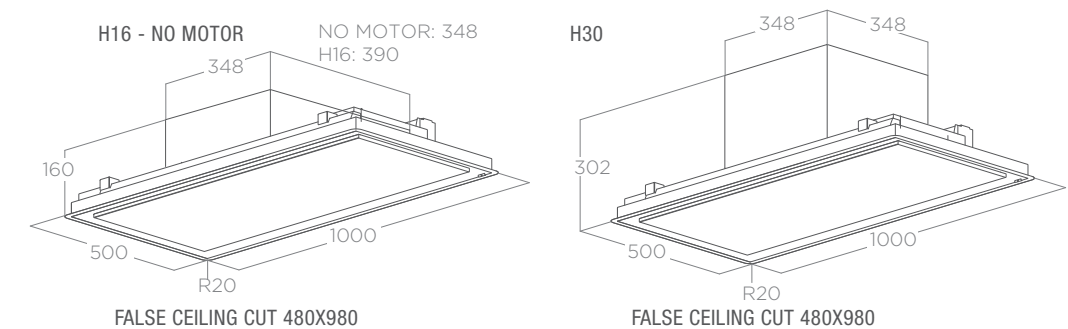

LIGHTING		
Type	Strip LED 2x14 W	
Intensity	563 LUX	
Temperature	2700 K - 5000 K	
SPECIFICATION		
Controls	Remote control	
Speeds	3 + 2 boost	
	H16	H30
Booster airflow	720 m³/h	770 m³/h
Noise level min-max	51 - 68 dBA	40 - 53 dBA
Total absorption	303 W	298 W
Duct size	222 x 89 mm (internal)	150 mm
Aluminium grease filter	Included	Included
Remote control	Included	Included

ACCESSORIES	
On board filtering kit H30	KIT0148449
High performance first installation filtering kit H16-H30 Stainless steel	KIT0148450A
Regeneratable first installation filtering kit H16-H30 Stainless steel	KIT0167743
High performance first installation filtering kit H16-H30 White	KIT0181126
Regeneratable first installation filtering kit H16-H30 White	KIT0181117
High performance first installation filtering kit H16-H30 Black	KIT0181124
Regeneratable first installation filtering kit H16-H30 Black	KIT0180993
Remote internal motor	KIT0184296
Remote external motor (wall)	KIT0184135
Remote external motor (roof)	KIT0147881
Remote external motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392
Ceiling hood dimmer kit	KIT0147878

MODELS	
ILLUSION PLUS NO MOTOR White	PRF0146253A
ILLUSION PLUS NO MOTOR Customisable	PRF0146252A
ILLUSION PLUS H16 White	PRF0147727B
ILLUSION PLUS H16 Black	PRF0172645B
ILLUSION PLUS H16 Customisable	PRF0147726B
ILLUSION PLUS H30 White	PRF0146251B
ILLUSION PLUS H30 Black	PRF0172646B
ILLUSION PLUS H30 Customisable	PRF0146250B

For remote motors specification see page 162
For optional recirculating kit see page 165




LULLABY

DESIGN FABRIZIO CRISÀ

ELICA CONNECT

120x65 cm
Duct-out / Re-circulating
White Wood: white lacquered wood + stainless steel
Wood: natural oak + White soft touch effect

The recirculating models can be installed without the false ceiling. The central full LED light panel is surrounded by a natural oak frame or white laquered frame. Matching extension shelves are available as accessories and any type of commercially available light can also be connected.

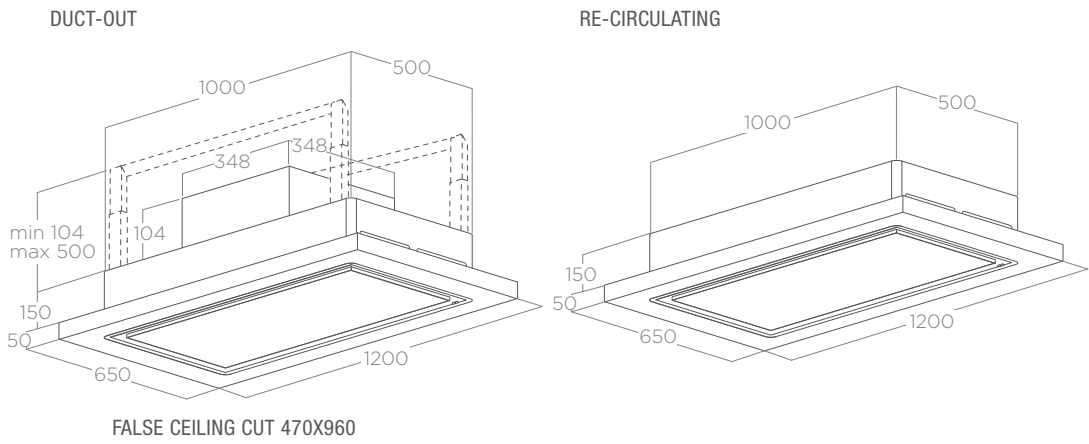

LIGHTING	
Type	LED Panel 28W
Intensity	1683 LUX
Temperature	2700 - 5000 K

SPECIFICATION		
Controls	Duct-out Remote control	Re-circulating Remote control
Speeds	3 + 2 boost	3 + 2 boost
Booster airflow	770 m³/h	470 m³/h
Noise level min-max	40 - 53 dBA	46 - 64 dBA
Total absorption	298 W	568 W
Aluminium grease filter	Included	Included
HP Regeneratable anti-odour ceramic filter		Included
Remote control	Included	Included

ACCESSORIES	
HP Regeneratable anti-odour ceramic filter	KIT0147861A
White shelf kit	KIT0147859
Oak shelf kit	KIT0147858
On board filtering kit H30	KIT0148449
Ceiling hood dimmer kit	KIT0147878

MODELS	
LULLABY @ White Wood Duct-out	PRF0167048
LULLABY @ White Wood Re-circulating (*)	PRF0167049
LULLABY @ Wood Duct-out	PRF0167046
LULLABY @ Wood Re-circulating (*)	PRF0167047

Model not subject to compulsory energy certification. (*)

** with optional recirculating kit see page 165
For optional shelf kits see page 167




CLOUD SEVEN

DESIGN FABRIZIO CRISÀ

90 cm
Duct-out / Re-circulating
Stainless steel + white

Plug&Play model, easy-to-install, no need for building work on gypsum panels or additional pipes (Cloud Seven Filter).

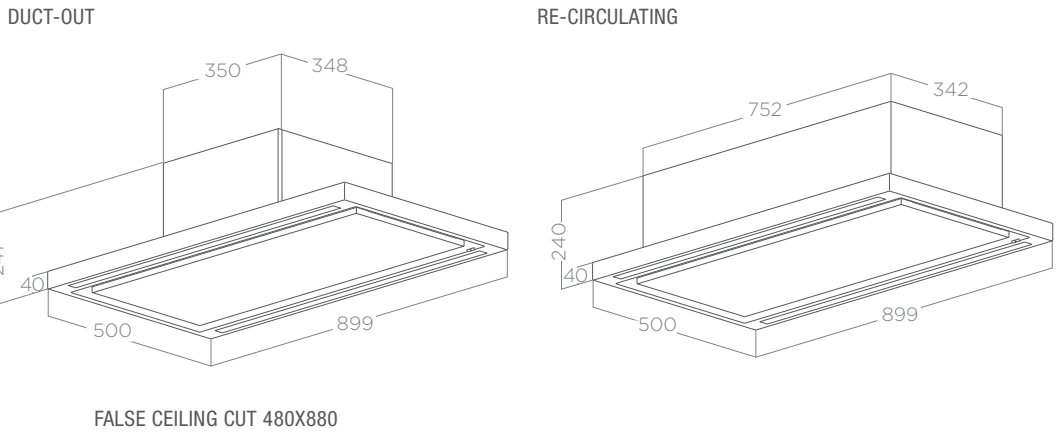

LIGHTING	
Type	Strip LED 2x7 W
Intensity	393 LUX
Temperature	3500 K

SPECIFICATION		
Controls	DUCT-OUT Remote control	RE-CIRCULATING Remote control
Speeds	3 + 2 boost	3 + 2 boost
Booster airflow	770 m³/h	570 m³/h
Noise level min-max	43 - 60 dBA	52 - 68 dBA
Total absorption	284 W	214 W
Aluminium grease filter	Included	Included
Regeneratable filter		Included
Remote control	Included	Included

MODELS	
CLOUD SEVEN Re-circulating (*)	PRF0141953
CLOUD SEVEN Duct-out	PRF0142094A

Model not subject to compulsory energy certification. (*)




PANDORA
ELICA DESIGN CENTER



PANDORA

ELICA DESIGN CENTER

90 cm
Duct-out / Re-circulating (internal motor)
Duct-out (Remote motor)
Stainless steel + black glass, black + black glass

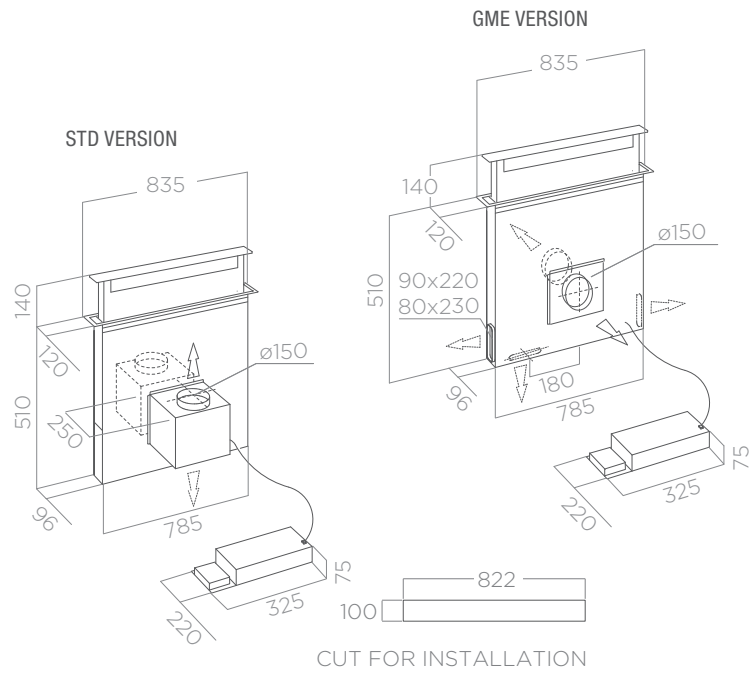

SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	669 m³/h
Noise level min-max	45 - 59 dBA
Total absorption	275 W
Aluminium grease filter	Included
Charcoal filter	Included (internal motor models)

ACCESSORIES	
Remote motor GME22A for external installation	PRF0179706
Remote motor GME88 for internal installation	PRF0046491A

MODELS	
PANDORA Stainless steel (*)	PRF0120980
PANDORA GME Stainless steel (**)	PRF0120982
PANDORA Black (*)	PRF0120979
PANDORA GME Black (**)	PRF0120981


(*) On-board motor supplied
(**) Remote motor not supplied
For remote motors specification see page 164



GETUP

DESIGN FABRIZIO CRISA

90 cm
Duct-out / Re-circulating
Stainless steel, black soft touch effect + black glass, cast iron effect, cast iron effect + customisable

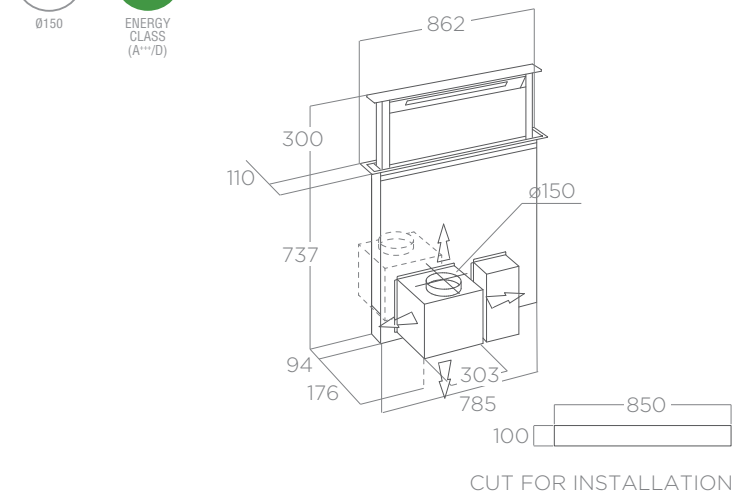

Can be Wi-Fi connected for control by voice assistant or via the Elica App which even lets you know when the filter needs regenerating.

ELICA CONNECT

LIGHTING	
Type	STRIP LED 1x7W
Intensity	253 LUX
Temperature	3500 K

SPECIFICATION	
Controls	Infrared touch control
Speeds	3 + 2 boost
Booster airflow	730 m³/h
Noise level min-max	43 - 63 dBA
Total absorption	275 W
Aluminium grease filter	Included

ACCESSORIES	
Regeneratable charcoal filter HP	KIT0166432
Regeneratable carbon filter kit	KIT0166444
Remote motor transformation kit	KIT0166435
Chrome-plated trim profile	KIT0187322

MODELS	
GETUP Stainless steel	PRF0161680
GETUP Black	PRF0162784
GETUP Cast iron	PRF0162866
GETUP Customisable	PRF0162869



INTERSTELLAR

DESIGN FABRIZIO CRISÀ

Suspended



INTERSTELLAR

DESIGN FABRIZIO CRISÀ

Ø67 cm
Re-circulating
Shiny stainless steel + clear glass, shiny Stainless steel + black glass

SPECIAL MATERIAL

DIM LIGHT

COMFORT SILENCE

DELAY SWITCH OFF

EASY MAINTENANCE

MAINTENANCE ALARM


HIGH PERFORMANCE REGENERATABLE FILTER

50 CM

65 CM

Ø150

ENERGY CLASS (A+++/D)

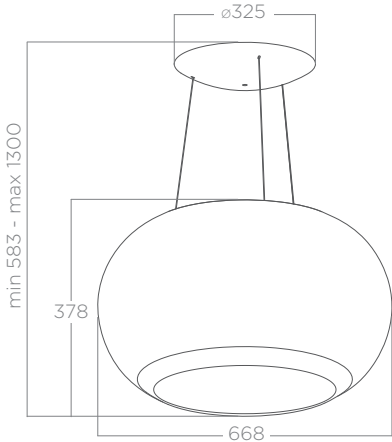

LIGHTING	
Type	LED 9 W
Intensity	261 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	450 m³/h (Duct-out) 325 m³/h (Re-circulating)
Noise level min-max	46 - 53 dBA
Total absorption	134 W
Aluminium grease filter	Included
Regeneratable charcoal filter HP	Included
Remote control	Included
ACCESSORIES	
Extension cable kit (5m)	KIT0112772
MODELS	
INTERSTELLAR Clear	PRF0151808
INTERSTELLAR Black	PRF0151809



IKONA LIGHT

DESIGN FABRIZIO CRISÀ

60 cm
Re-circulating
Stainless steel, black soft touch effect, white

EASY MAINTENANCE

MAINTENANCE ALARM


REGENERATABLE FILTER

50 CM

70 CM

Ø150

ENERGY CLASS (A+++/D)

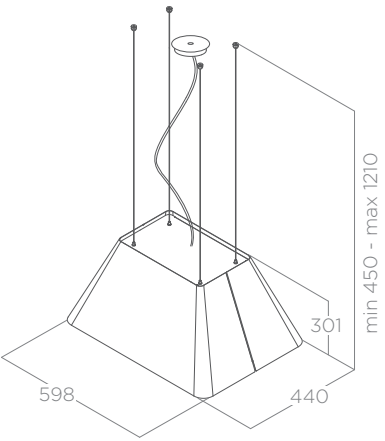

LIGHTING	
Type	Strip LED 1x7 W
Intensity	365 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	605 m³/h
Noise level min-max	47 - 62 dBA
Total absorption	207 W
Aluminium grease filter	Included
Charcoal filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0162221
Stainless steel wall installation kit	KIT0175807
Black wall installation kit	KIT0175808
Extension cable kit (2,5m)	KIT0147941
Extension cable kit (5m)	KIT0147942
MODELS	
IKONA LIGHT Stainless steel	PRF0165071
IKONA LIGHT Black	PRF0165082
IKONA LIGHT White	PRF0165083



Possibility for wall mounting by ordering the ancillary installation kit.



EASY UX

DESIGN FABRIZIO CRISÀ



Ø50 cm
Re-circulating
Stainless steel, black soft touch effect, white soft touch effect

DELAY
SWITCH OFF

EASY
MAINTENANCE

MAINTENANCE
ALARM


REGENERATABLE
FILTER

50 CM

65 CM

Ø150

ENERGY
CLASS
(A++/D)

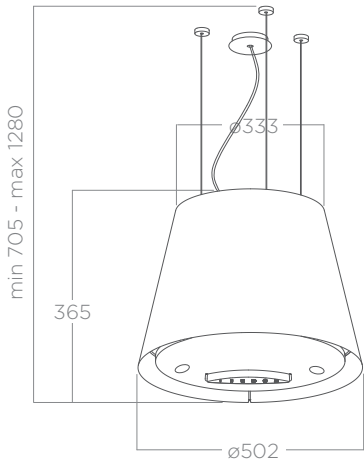

LIGHTING	
Type	LED 3X2,5 W
Intensity	211 LUX
Temperature	4000 K

SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	610 m³/h
Noise level min-max	46 - 62 dBA
Total absorption	207,5 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included

ACCESSORIES	
Extension cable kit (2,5m)	KIT01889
Extension cable kit (5m)	KIT01921
Stainless steel wall installation kit	KIT0175805
Black wall installation kit	KIT0175806

MODELS	
EASY UX Stainless steel	PRF0120354A
EASY UX Black	PRF0120352A
EASY UX White	PRF0119940A



Possibility for wall mounting by ordering the ancillary installation kit.

JUNO URBAN
ELICA DESIGN CENTER





JUNO URBAN CAST IRON



JUNO URBAN ZINC

JUNO URBAN

ELICA DESIGN CENTER

Ø 50 cm
Re-circulating
Cast iron effect metal, zinc coating effect metal

EASY
MAINTENANCE


REGENERATABLE
FILTER

50 CM

65 CM

Ø150

A
ENERGY
CLASS
(A++/D)

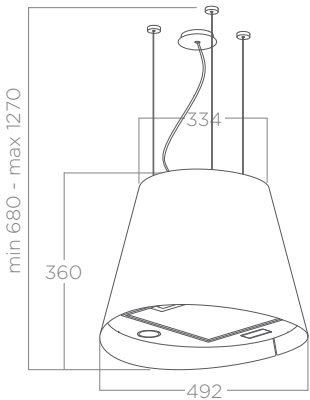

Possibility for wall mounting by ordering the ancillary installation kit.



LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Soft light push button
Speeds	3
Max airflow	620 m³/h
Noise level min-max	45 - 67 dBA
Total absorption	205 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included
ACCESSORIES	
Stainless steel wall installation kit	KIT0175805
Black wall installation kit	KIT0175806
Extension cable kit (2,5m)	KIT01889
Extension cable kit (5m)	KIT01921
MODELS	
JUNO URBAN Cast iron	PRF0147728B
JUNO URBAN Zinc	PRF0147730B



JUNO WHITE



JUNO STAINLESS STEEL



JUNO BLACK

JUNO

ELICA DESIGN CENTER

Ø 50 cm
Re-circulating
Stainless steel, white, black

EASY
MAINTENANCE


REGENERATABLE
FILTER

50 CM

65 CM

Ø150

A
ENERGY
CLASS
(A++/D)

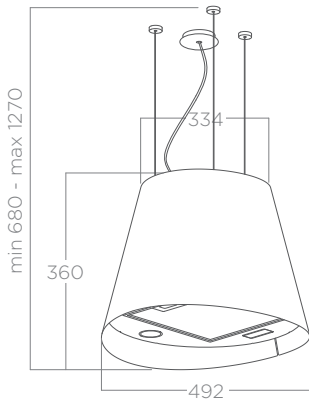

Possibility for wall mounting by ordering the ancillary installation kit.



LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Soft light push button
Speeds	3
Max airflow	620 m³/h
Noise level min-max	45 - 67 dBA
Total absorption	205 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included
ACCESSORIES	
Stainless steel wall installation kit	KIT0175805
Black wall installation kit	KIT0175806
Extension cable kit (2,5m)	KIT01889
Extension cable kit (5m)	KIT01921
MODELS	
JUNO Stainless steel	PRF0089651D
JUNO Black	PRF0071970D
JUNO White	PRF0071972D



WAVE UX

DESIGN FABRIZIO CRISÀ



Ø50 cm
Re-circulating
Stainless steel, black soft touch effect

DELAY SWITCH OFF

EASY MAINTENANCE

MAINTENANCE ALARM


REGENERATABLE FILTER

50 CM

65 CM

Ø150

ENERGY CLASS (A+++/D)

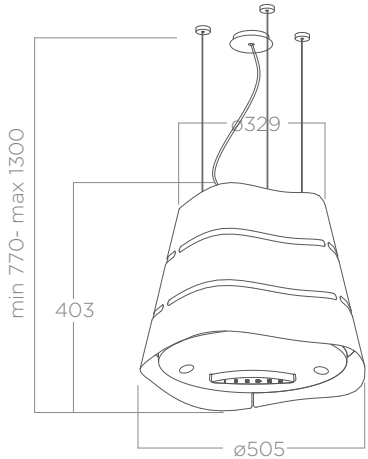

LIGHTING	
Type	LED 3X2,5 W + LED 4X3 W
Intensity	211 LUX
Temperature	4000 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	610 m³/h
Noise level min-max	46 - 62 dBA
Total absorption	219,5 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included
ACCESSORIES	
Extension cable kit (2,5m)	KIT01889
Extension cable kit (5m)	KIT01921
Stainless steel wall installation kit	KIT0175805
Black wall installation kit	KIT0175806
MODELS	
WAVE UX Stainless steel	PRF0171194
WAVE UX Black	PRF0171193



Possibility for wall mounting by ordering the ancillary installation kit.



SHINING PELTROX



SHINING RUST

SHINING

DESIGN FABRIZIO CRISÀ

Ø 50 cm
Re-circulating
Peltrox effect metal, rust

COMFORT SILENCE

SPECIAL MATERIAL

DELAY SWITCH OFF

EASY MAINTENANCE

MAINTENANCE ALARM


HIGH PERFORMANCE REGENERATABLE FILTER

50 CM

65 CM

Ø150

ENERGY CLASS (A+++/D)

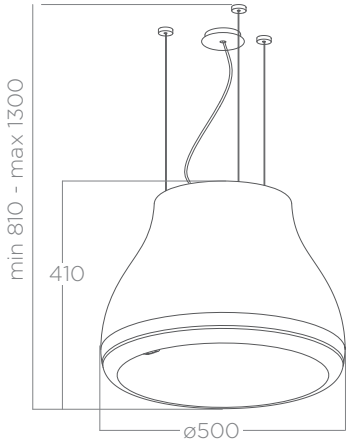

Possibility for wall mounting by ordering the ancillary installation kit.




LIGHTING	
Type	LED 9 W
Intensity	685 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	460 m³/h
Noise level min-max	46 - 53 dBA
Total absorption	179 W
Aluminium grease filter	Included
Regeneratable charcoal filter HP	Included
ACCESSORIES	
White remote control	KIT0121468
Black remote control	KIT0121469
Chrome wall installation kit	KIT0146156
Black wall installation kit	KIT0146155
Extension cable kit (5m)	KIT0112772
MODELS	
SHINING Peltrox	PRF0120497A
SHINING Rust	PRF0120528A



PEARL

DESIGN FABRIZIO CRISÀ

Ø80 cm
Re-circulating
White pearl, matt white, matt black, shiny stainless steel

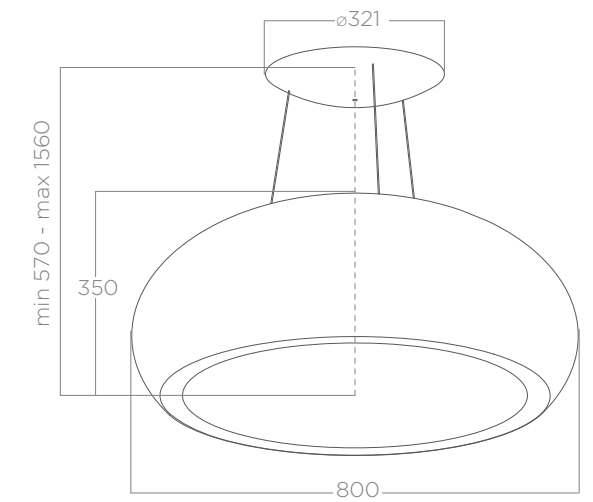

LIGHTING	
Type	Neon 4x24 W
Intensity	1386 LUX
Temperature	6500 K

SPECIFICATION	
Controls	Remote control
Speeds	3 + boost
Booster airflow	400 m³/h
Noise level min-max	55 - 67 dBA
Total absorption	350 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included
Remote control	Included

ACCESSORIES	
Extension cable kit (2,5m)	KIT0067590

MODELS	
PEARL Stainless steel	PRF0098394
PEARL Black	PRF0098393
PEARL White pearl	PRF0024262A
PEARL White matt	PRF0098392

Model not subject to compulsory energy certification.




PIX

DESIGN FABRIZIO CRISÀ

42x42 cm
Re-circulating
White soft touch effect, black soft touch effect, concrete effect, denim finish

- COMFORT SILENCE
- SPECIAL MATERIAL
- MAINTENANCE ALARM
- REGENERATABLE FILTER
- 50 CM
- 65 CM
- Ø150
- ENERGY CLASS (A++/D)

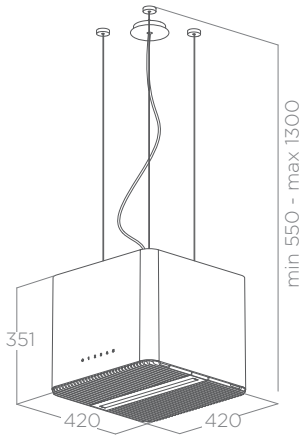

Possibility for wall mounting by ordering the ancillary installation kit.

LIGHTING	
Type	Strip LED 1x7 W
Intensity	365 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	610 m³/h
Noise level min-max	44 - 60 dBA
Total absorption	207 W
Aluminium grease filter	Included
Regeneratable charcoal filter	Included
ACCESSORIES	
Stainless steel wall installation kit	KIT0146153
Extension cable kit (2,5m)	KIT0147941
Extension cable kit (5m)	KIT0147942
MODELS	
PIX Black	PRF0146220
PIX White	PRF0145561
PIX Denim	PRF0146221
PIX Concrete effect	PRF0146222




DIVA

DESIGN FABRIZIO CRISÀ

Ø 50 cm
Re-circulating
Black soft touch effect, white soft touch effect, shiny stainless steel

- COMFORT SILENCE
- DELAY SWITCH OFF
- EASY MAINTENANCE
- MAINTENANCE ALARM
- HIGH PERFORMANCE REGENERATABLE FILTER
- 50 CM
- 65 CM
- Ø150
- ENERGY CLASS (A++/D)

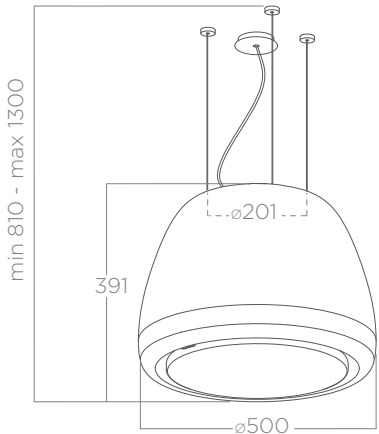

Possibility for wall mounting by ordering the ancillary installation kit.



LIGHTING	
Type	LED 9 W
Intensity	685 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Capacitive touch control
Speeds	3 + boost
Booster airflow	460 m³/h
Noise level min-max	46 - 53 dBA
Total absorption	179 W
Aluminium grease filter	Included
Regeneratable charcoal filter HP	Included
ACCESSORIES	
White Design remote control	KIT0121468
Black Design remote control	KIT0121469
Chrome wall installation kit	KIT0146156
Black wall installation kit	KIT0146155
Extension cable kit (5m)	KIT0112772
MODELS	
DIVA CLASSIC	PRF0098360
DIVA HEAVYMETAL	PRF0098364
DIVA ROCK	PRF0098361



COSA MANCA: PANE
Biscotti
Fragole
Melanzane
Zucchine

SLEEK

DESIGN FABRIZIO CRISÀ



SLEEK ADVANCE

DESIGN FABRIZIO CRISÀ

60 - 80 cm
Duct-out / Re-circulating
Stainless steel, black soft touch effect

AIRMATIC

TUNE WHITE

PERIMETER ASPIRATION

TOTAL INTEGRATION

EASY MAINTENANCE

MAINTENANCE ALARM


REGENERATABLE FILTER

50 CM

65 CM

Ø150

ENERGY CLASS (A++/D)

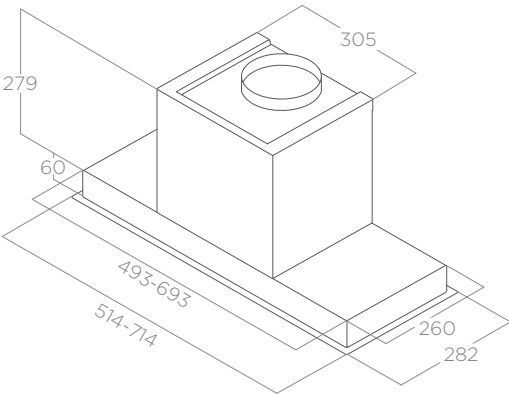

The hood is equipped with the Airmatic feature, which thanks to a smart sensor allows it to power on automatically. This helps ensure clean air inside the home at any moment of the day and greater protection of the kitchen cabinets and furniture.

LIGHTING	
Type	STRIP LED 1x7W
Intensity	477 LUX
Temperature	3000-3500-4000 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	690 m³/h
Noise level min-max	51 - 67 dBA
Total absorption	277 W
Aluminium grease filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0140096
Air diffuser grid kit 150mm	KIT0162617
Telescopic chimney kit h18,5+h18,5m	KIT0141458
MODELS	
SLEEK ADVANCE 60 Stainless steel	PRF0180299
SLEEK ADVANCE 60 Black	PRF0183971
SLEEK ADVANCE 80 Stainless steel	PRF0182867
SLEEK ADVANCE 80 Black	PRF0189331



SLEEK 2.0

DESIGN FABRIZIO CRISÀ

60 - 80 cm
Duct-out / Re-circulating
Stainless steel, stainless steel + white glass

DELAY SWITCH OFF

PERIMETER ASPIRATION

TOTAL INTEGRATION

MAINTENANCE ALARM


REGENERATABLE FILTER

50 CM

65 CM

Ø150

ENERGY CLASS (A++/D)

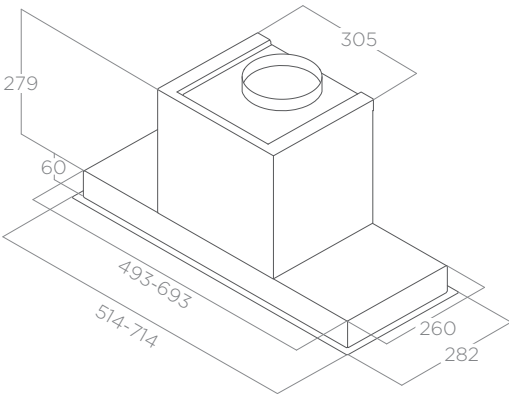

LIGHTING	
Type	Strip LED 1x7 W
Intensity	365 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	700 m³/h
Noise level min-max	51 - 67 dBA
Total absorption	277 W
Aluminium grease filter	Included
ACCESSORIES	
Regeneratable charcoal filter	CFC0140096
Air diffuser grid kit 150mm	KIT0162617
Telescopic chimney kit h18,5+h18,5m	KIT0141458
MODELS	
SLEEK 2.0 60 Stainless steel	PRF0092333A
SLEEK 2.0 60 Stainless steel + white glass	PRF0097676A
SLEEK 2.0 80 Stainless steel	PRF0095073A
SLEEK 2.0 80 Stainless steel + white glass	PRF0097708A



LANE
DESIGN FABRIZIO CRISÀ



LANE BLACK MATT





LANE STAINLESS STEEL

LANE

DESIGN FABRIZIO CRISÀ

60 - 80 cm
Duct-out / Re-circulating
Stainless steel, black soft touch effect, white

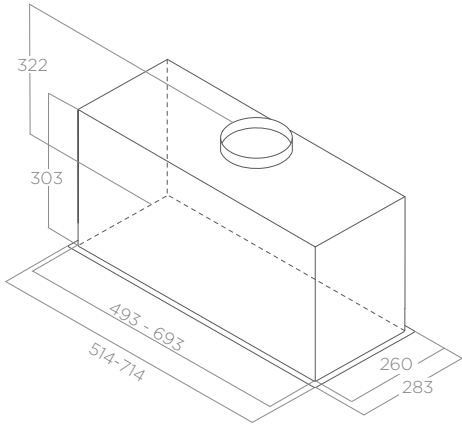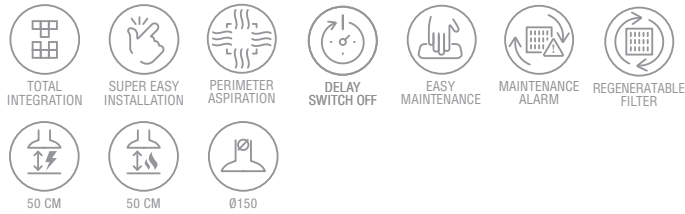

A high performance hood that blends perfectly with minimalist design and offers excellent value for money. The patented installation system allows the hood to be secured to the cabinet with only 2 screws from below, in less than one minute. Remote motor versions for in-line or external installation.

LIGHTING

Type	STRIP LED 1x7W
Intensity	365 LUX
Temperature	3500 K

SPECIFICATION*

Controls	Electronic push button 3 + boost
Booster airflow	650 m³/h
Noise level min-max	49 - 65 dBA
Total absorption	257 W
Aluminium grease filter	Included

* Models with interior motor. For remote motor performance see page 164

ACCESSORIES

Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617

MODELS

LANE 60 Stainless steel	PRF0157333
LANE 60 Stainless steel remote †	PRF0171141
LANE 60 Black	PRF0165830
LANE 60 White	PRF0157357
LANE 80 Stainless steel	PRF0157377
LANE 80 Stainless steel remote †	PRF0171142
LANE 80 Black	PRF0165834
LANE 80 White	PRF0157394

† for GME HE external and GME11 inline remote motors see page 164

BOXIN DRY

DESIGN FABRIZIO CRISÀ





BOXIN DRY

DESIGN FABRIZIO CRISÀ

60 - 90 - 120 cm
Duct-out / Re-circulating
Stainless steel

NO DRIP SYSTEM

TOTAL INTEGRATION

EASY MAINTENANCE


MAINTENANCE ALARM

REGENERATABLE FILTER

50 CM

50 CM

Ø150

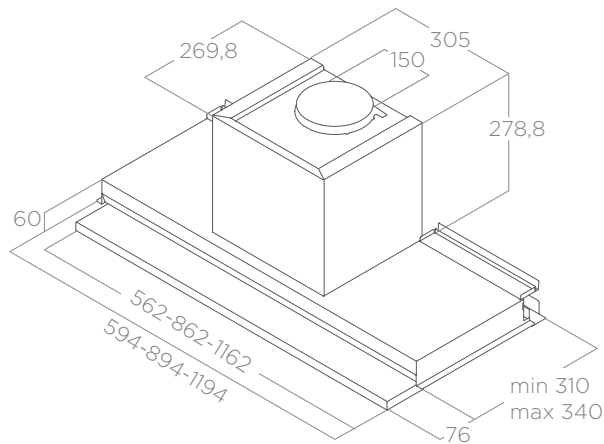

Solves the problem of condensation with an elegant mechanical solution. The system has been designed to prevent dripping on the hob, as well as protect wall units from steam.

LIGHTING	
Type	LED 2x2.1W - LED 3x2.1W (120cm)
Intensity	181 LUX - 211 LUX (120cm)
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	700 m³/h
Noise level min-max	52 - 67 dBA
Total absorption	255 W
Stainless steel grease filters	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
Chimney kit H12	KIT0091876
Chimney kit H18,5+18,5	KIT0141458
MODELS	
BOXIN DRY 60	PRF0181274
BOXIN DRY 90	PRF0181068
BOXIN DRY 120	PRF0181338



BOXIN ADVANCE

DESIGN FABRIZIO CRISÀ

60 - 90 - 120 cm
Duct-out / Re-circulating
Stainless steel

AIRMATIC

TOTAL INTEGRATION

TUNE WHITE

EASY MAINTENANCE

MAINTENANCE ALARM


REGENERATABLE FILTER

50 CM

57 CM

Ø150

ENERGY CLASS (A+++/D)

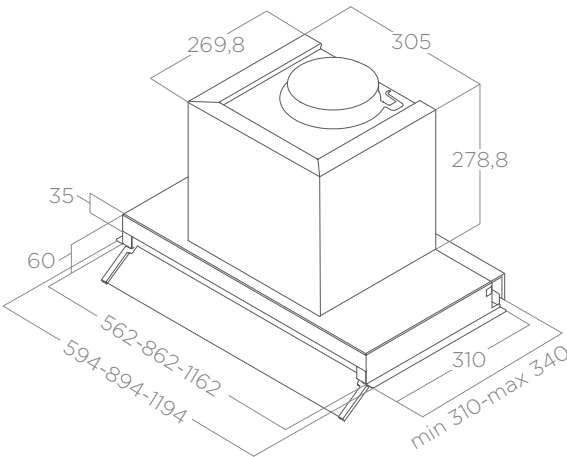

The hood is equipped with the Airmatic feature that thanks to a smart sensor, allows it to automatically power on. This helps ensure clean air inside the home at all times of the day, as well as increased protection of cabinets and kitchen furnishings.


LIGHTING	
Type	STRIP LED 1X7W
Intensity	421 LUX
Temperature	3000 - 3500 - 4000 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	730 m³/h
Noise level min-max	50 - 64 dBA
Total absorption	257 W
Stainless steel grease filters	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
Chimney kit H12	KIT0091876
Chimney kit H18,5+18,5	KIT0141458
MODELS	
BOXIN ADVANCE 60	PRF0180599
BOXIN ADVANCE 90	PRF0181497
BOXIN ADVANCE 120	PRF0182703



BOXIN HE

ELICA DESIGN CENTER

60 - 90 - 120 cm
Duct-out / Re-circulating
Stainless steel + white glass

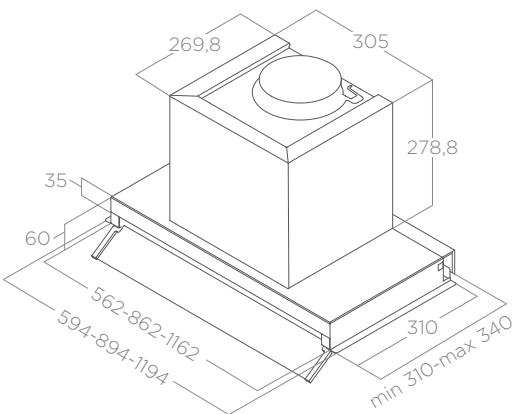


LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Mechanical rotative
Speeds	3
Max airflow	610 m³/h
Noise level min-max	49 - 70 dBA
Total absorption	255 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
Chimney kit H12	KIT0091876
Chimney kit H18,5+18,5	KIT0141458
MODELS	
BOXIN HE 60	PRF0097795A
BOXIN HE 90	PRF0097796A
BOXIN HE 120	PRF0097797A



BOXIN LUX

ELICA DESIGN CENTER

60 - 90 - 120 cm
Duct-out / Re-circulating
Stainless steel

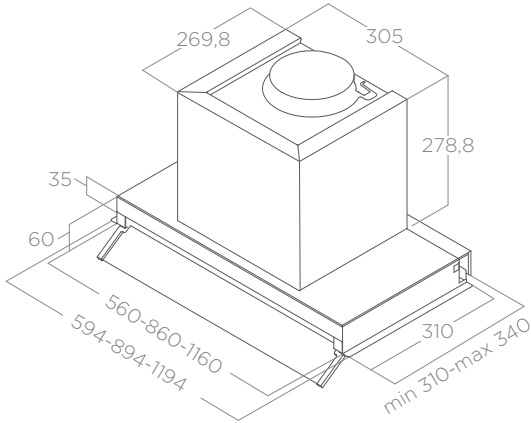



LIGHTING	
Type	LED 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Mechanical rotative
Speeds	3
Max airflow	620 m³/h
Noise level min-max	50 - 70 dBA
Total absorption	255 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
Chimney kit H12	KIT0091876
Chimney kit H18,5+18,5	KIT0141458
MODELS	
BOXIN LUX 60 Stainless steel	PRF0114760A
BOXIN LUX 90 Stainless steel	PRF0114761A
BOXIN LUX 120 Stainless steel	PRF0114762A



FOLD S

ELICA DESIGN CENTER

60 - 80 cm
Duct-out / Re-circulating
Stainless steel

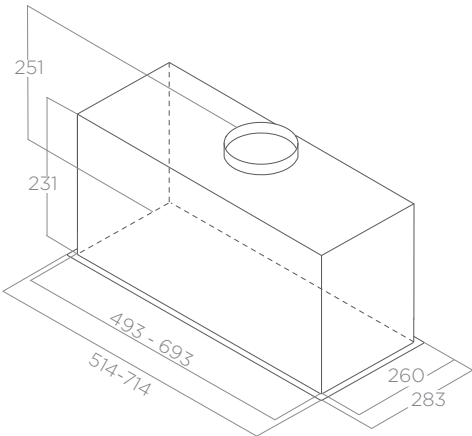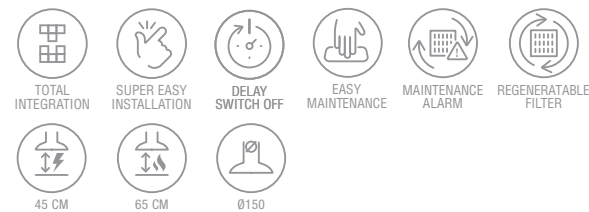

The product is equipped with a patented mounting system. Through the use of two clips on the sides of the hood and with only two screws, it can be installed into the cabinet in less than one minute.


LIGHTING	
Type	STRIP LED 1X7W
Intensity	477 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	710 m³/h
Noise level min-max	53 - 66 dBA
Total absorption	257 W
Stainless steel grease filters	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
MODELS	
FOLD S 60	PRF0189414
FOLD S 80	PRF0189419



FOLD

ELICA DESIGN CENTER

60 - 80 cm
Duct-out / Re-circulating
Grey, black

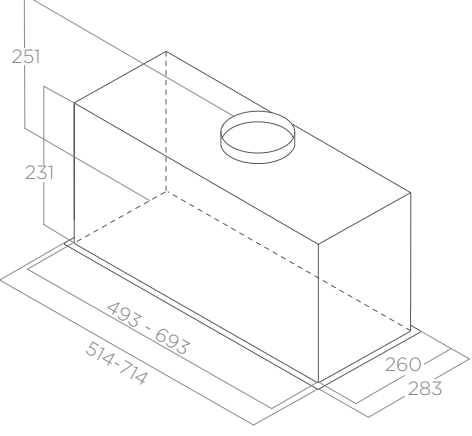

The product is equipped with a patented mounting system. Through the use of two clips on the sides of the hood and with only two screws, it can be installed into the cabinet in less than one minute.



LIGHTING	
Type	LED 2X2.1W
Intensity	221 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Soft light push button
Speeds	3
Max airflow	600 m³/h
Noise level min-max	46 - 65 dBA
Total absorption	180 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
MODELS	
FOLD 60 GREY	PRF0189396
FOLD 60 Black	PRF0189409
FOLD 80 Grey	PRF0189400
FOLD 80 Black	PRF0189411



ERA HE

ELICA DESIGN CENTER

60 - 80 cm
Duct-out / Re-circulating
Stainless steel

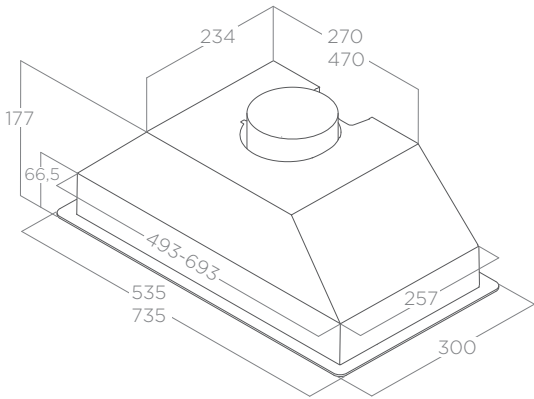

LIGHTING	
Type	LED 2x3 W
Intensity	73 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Mechanical rotative
Speeds	3
Max airflow	428 m³/h
Noise level min-max	57 - 68 dBA
Total absorption	121 W
Stainless steel grease filters	Included
ACCESSORIES	
Charcoal filter	CFC0141571
MODELS	
ERA HE 60	PRF0189364
ERA HE 80	PRF0189359



ERA LUX 80 STAINLESS STEEL



ERA LUX 60 WHITE





ERA LUX 60 BLACK

ERA LUX

ELICA DESIGN CENTER

60 - 80 cm
Duct-out / Re-circulating
Stainless steel, white, black

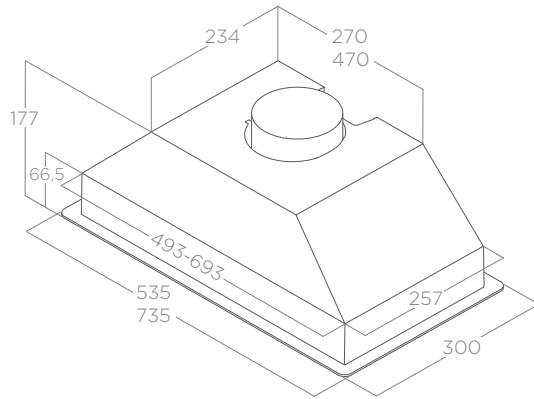



LIGHTING	
Type	LED 2x3 W
Intensity	73 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Mechanical push button
Speeds	3
Max airflow	368 m³/h
Noise level min-max	62 - 67 dBA
Total absorption	146 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141571
MODELS	
ERA LUX 60 Stainless steel	PRF0189351
ERA LUX 60 White	PRF0142716
ERA LUX 60 Black	PRF0189384
ERA LUX 80 Stainless steel	PRF0189357
ERA LUX 80 White	PRF0189355
ERA LUX 80 Black	PRF0189388



ERA STD

ELICA DESIGN CENTER

60 - 80 cm
Duct-out / Re-circulating
Grey

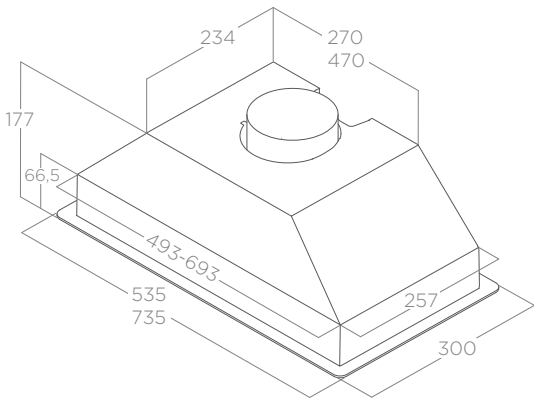



LIGHTING	
Type	LED 2x3 W
Intensity	78 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Mechanical slider
Speeds	3
Max airflow	224 m³/h
Noise level min-max	45 - 54 dBA
Total absorption	81 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141571
MODELS	
ERA STD 60	PRF0189345
ERA STD 80	PRF0189349

CT35 PRO

ELICA DESIGN CENTER

60 - 90 - 120 cm
Duct-out
Stainless steel

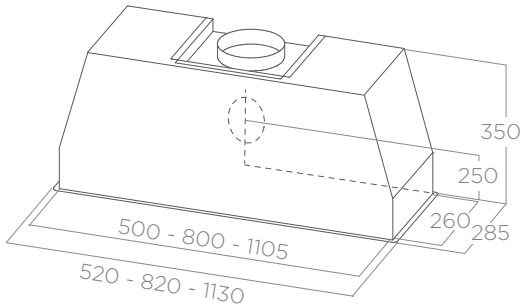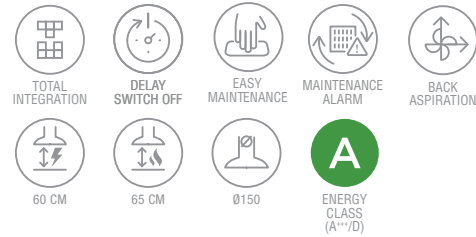

LIGHTING			
Type	STRIP LED 2x3W		
	60cm	90cm	120cm
Intensity	121 LUX	97 LUX	73 LUX
Temperature	4200 K	4200 K	4200 K
SPECIFICATION*			
Controls	Electronic push button		
Speeds	3 + boost		
	60cm	90cm	120cm
Booster airflow	650 m³/h	750 m³/h	780 m³/h
Noise level min-max	51 - 73 dBA	50 - 69 dBA	52 - 69 dBA
Total absorption	281 W	281 W	281 W
Professional stainless steel grease filter	Included	Included	Included

* Models with interior motor. For remote motor performance see page 164

ACCESSORIES	
Remote motor GME11 for internal installation	PRF0006209A
Remote motor GME22A for external installation	PRF0179706
MODELS	
CT35 PRO 60	PRF0183203
CT35 PRO RM 60 †	PRF0183213
CT35 PRO 90	PRF0183209
CT35 PRO RM 90 †	PRF0183218
CT35 PRO 120	PRF0183210
CT35 PRO RM 120 †	PRF0183219



† for GME22A external and GME11 inline remote motors see page 164



ELITE 35


ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Silver + stainless steel

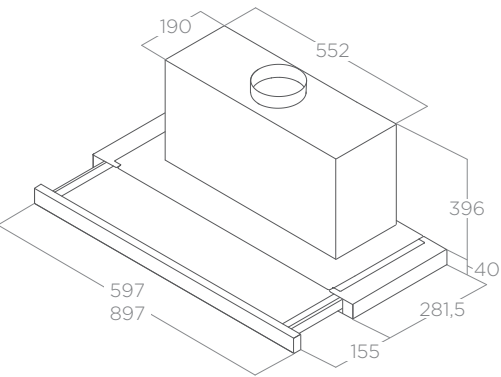

The front part of the product is easily removable and may be replaced with one of the same size, customisable in the same finish as used on your kitchen cabinets.


LIGHTING	
Type	LED 2x3 W
Intensity	49 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Electronic push button
Speeds	3 + boost
Booster airflow	640 m³/h
Noise level min-max	46 - 63 dBA
Total absorption	206 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0140075
Air diffuser grid kit 150mm	KIT0162617
MODELS	
ELITE 35 60	PRF0139077
ELITE 35 90	PRF0139069

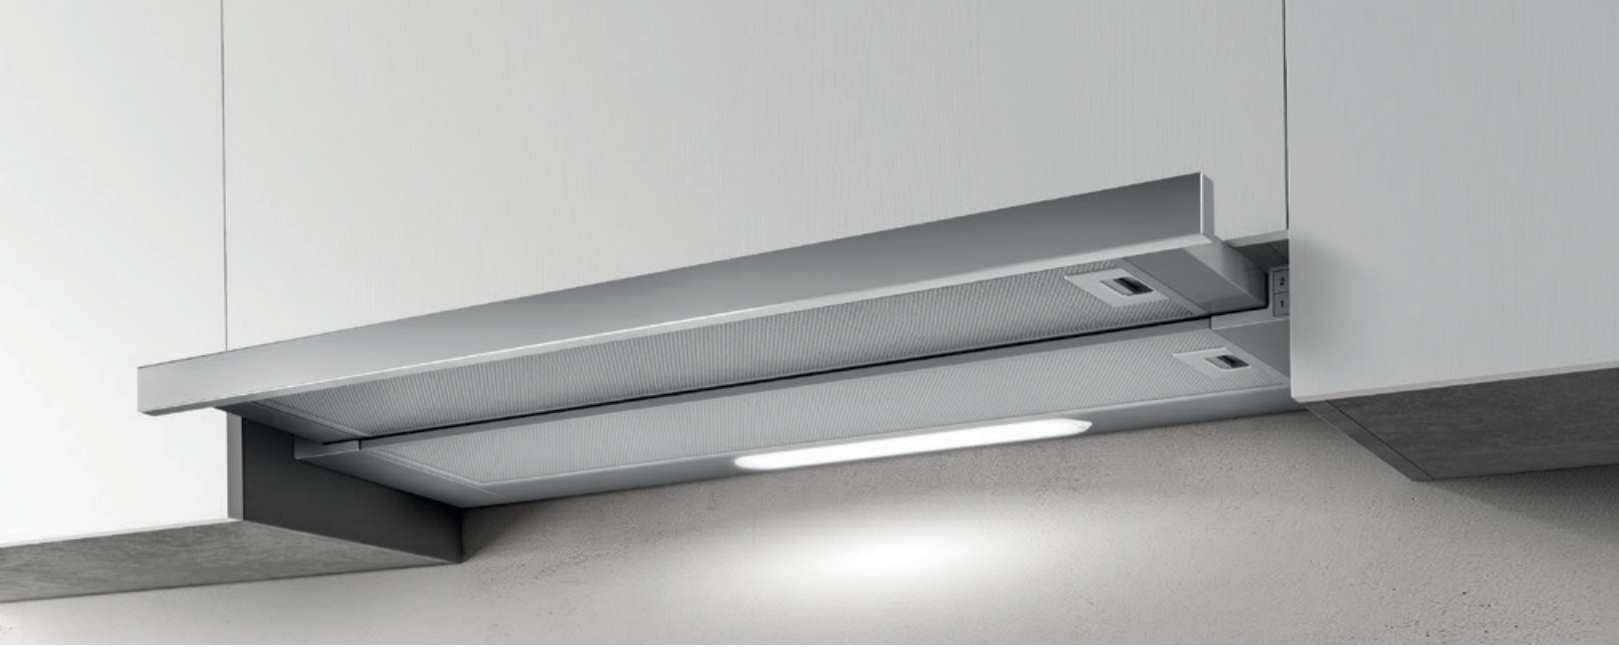

ELITE 14

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Silver + stainless steel

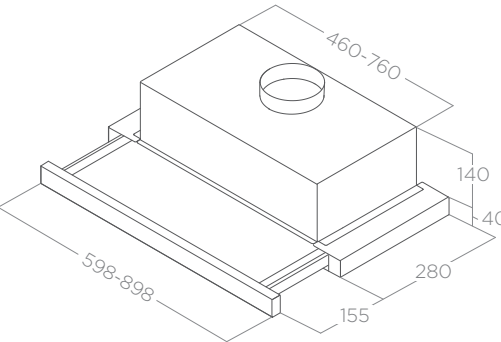



LIGHTING	
Type	LED 2x3 W
Intensity	73 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Mechanical push button
Speeds	3
Max airflow	304 m³/h
Noise level min-max	46 - 62 dBA
Total absorption	121 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141571
MODELS	
ELITE 14 LED 60	PRF0037989B
ELITE 14 LED 90	PRF0037992B



SKLOCK-S

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Silver

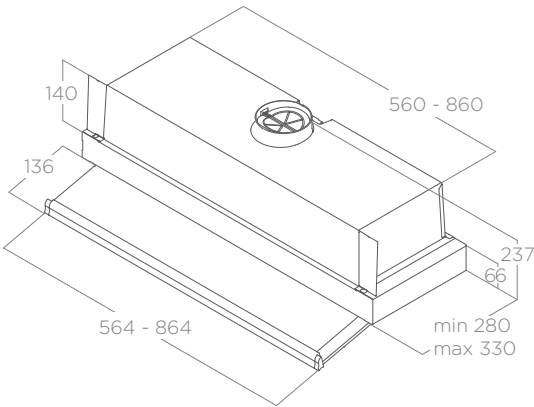

Its extremely simple and elegant design allows it to completely disappear into the cabinet. The hood is equipped with a front visor that protects the cabinet door during cooking, directing vapour through the extraction zone.



LIGHTING	
Type	LED 2X2.5W
Intensity	141 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Mechanical slider
Speeds	3
Max airflow	425 m³/h
Noise level min-max	57 - 69 dBA
Total absorption	120 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0141571
MODELS	
SKLOCK-S 60	PRF0189402
SKLOCK-S 90	PRF0189405



LEVER

ELICA DESIGN CENTER

60 - 90 - 120 cm
Duct-out / Re-circulating
Stainless steel + glass

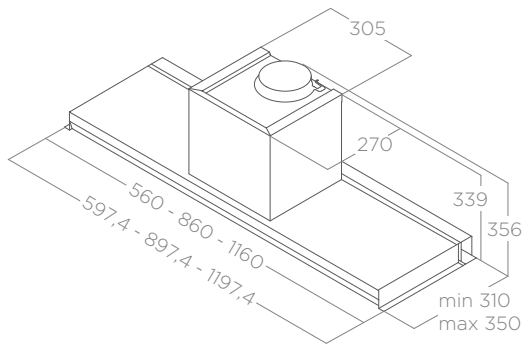

A very simple and elegant design characterises this appliance, which is completely hidden in the cabinet. It is equipped with a visor that protects the cabinet door during cooking, directing vapours through the extraction area.


LIGHTING	
Type	LED 2x2,5W
Intensity	145 LUX
Temperature	3500 K
SPECIFICATION	
Controls	Mechanical push button
Speeds	3
Max airflow	603 m³/h
Noise level min-max	46 – 67 dBA
Total absorption	255 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	CFC0140343
Regeneratable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
Chimney kit H12 Stainless steel	KIT0091876
Telescopic chimney kit h18,5+h18,5 Stainless steel	KIT0141458
MODELS	
LEVER 60	PRF0160153
LEVER 90	PRF0160152
LEVER 120	PRF0163362



KREA

ELICA DESIGN CENTER

60 - 90 cm
Duct-out / Re-circulating
Stainless steel

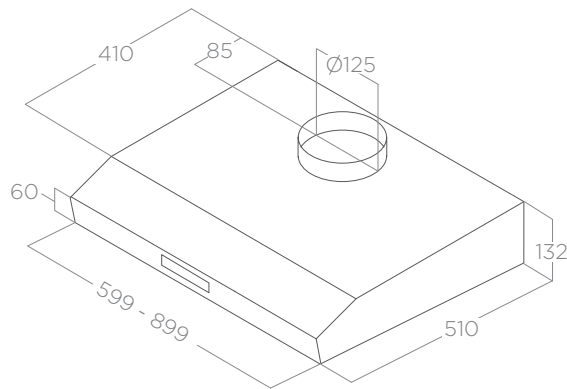


LIGHTING		
Type	STD	LUX
Intensity	LED 1x3 W 48 LUX	LED 2x3 W 97 LUX
Temperature	2700 K	2700 K
SPECIFICATION		
Controls	Mechanical slider	
Speeds	3	
Max airflow	STD	LUX
Noise level min-max	265 m³/h 50 - 64 dBA	336 m³/h 52 - 73 dBA
Total absorption	98 W	166 W
Aluminium grease filter	Included	Included
Charcoal filter	Included	Included
MODELS		
KREA STD 60 Stainless steel	PRF0012488D	
KREA LUX 90 Stainless steel	PRF0012543B	



INTEGRATA

ELICA DESIGN CENTER

60 cm
Duct-out / Re-circulating
Silver

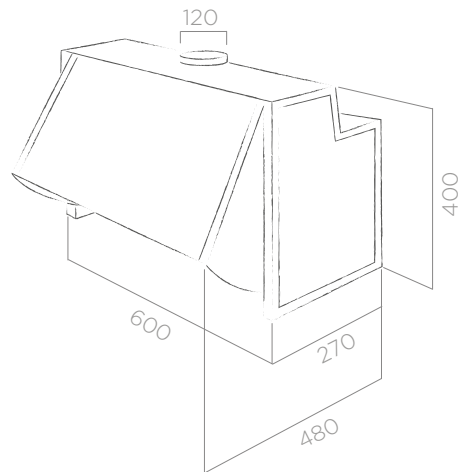

LIGHTING	
Type	LED 2 x 3 W
Intensity	169 LUX
Temperature	2700 K
SPECIFICATION	
Controls	Slider
Speeds	3
Max airflow	288 m³/h
Noise level min-max	67 dBA
Total absorption	121 W
Aluminium grease filter	Included
ACCESSORIES	
Charcoal filter	F00428
MODELS	
INT LED SP	5414464C

ODOUR FILTERS

	FILTER CODE	FILTER TYPE
ACUTA	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
ADÉLE2	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
ADÉLE2 ISLAND	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
ALPHA	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
APLOMB	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
AQUAVITAE2	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
ASCENT	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
ASCENT URBAN	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
BIO	CFC0140091	Regeneratable charcoal HP
	CFC0141725A	Regeneratable charcoal
BIO ISLAND	CFC0140091	Regeneratable charcoal HP
	CFC0141725A	Regeneratable charcoal
BLOOM	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal

	FILTER CODE	FILTER TYPE
BLOOM LUX	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
BOXIN ADVANCE	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
BOXIN DRY	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
BOXIN HE	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
BOXIN LUX	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
CRUISE	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
DIVA	CFC0140053	Regeneratable charcoal HP
	CFC0140090	Regeneratable charcoal
DOLCE	CFC0140426	Regeneratable charcoal
EASY UX	CFC0140088	Regeneratable charcoal
ELITE 14	CFC0141571	Charcoal
ELITE 35	CFC0140075	Charcoal
ERA HE	CFC0141571	Charcoal
ERA LUX	CFC0141571	Charcoal
ERA STD	CFC0141571	Charcoal

ODOUR FILTERS

	FILTER CODE	FILTER TYPE
FOLD	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
FOLD S	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
GALAXY	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
GALAXY ISLAND	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
GETUP	KIT0166432	Regeneratable charcoal HP
	KIT0166444	Regeneratable charcoal
HAIKU	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
HAIKU ISLAND	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
IKONA LIGHT	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
IKONA MAXXI PURE	CFC0162221	Regeneratable charcoal
INTEGRATA	F00428	Charcoal
INTERSTELLAR	CFC0140053	Regeneratable charcoal HP
	CFC0140090	Regeneratable charcoal
IO AIR	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal

	FILTER CODE	FILTER TYPE
JUNO	CFC0140088	Regeneratable charcoal
JUNO URBAN	CFC0140088	Regeneratable charcoal
KREA	CFC0140064	Charcoal
LANE	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
LEVER	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
MAJESTIC NO DRIP	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
METEORITE	CFC0141725A	Regeneratable charcoal
	CFC0140091	Regeneratable charcoal HP
METEORITE ISLAND	CFC0141725A	Regeneratable charcoal
	CFC0140091	Regeneratable charcoal HP
NUANCE	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
PANDORA	CFC0142324	Charcoal
PEARL	CFC0141725A	Regeneratable charcoal
PIX	KIT0147175	Regeneratable charcoal
PLAT	CFC0140423	Regeneratable charcoal
REEF A	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
REEF A ISLAND	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal

ODOUR FILTERS

	FILTER CODE	FILTER TYPE
RULES	CFC0166361	Regeneratable charcoal
SHINING	CFC0140053	Regeneratable charcoal HP
	CFC0140090	Regeneratable charcoal
SHY	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
SKLOCK-S	CFC0141571	Charcoal
SLEEK 2.0	CFC0140096	Regeneratable charcoal
SLEEK ADVANCE	CFC0140096	Regeneratable charcoal
STONE	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
SUPER PLAT	CFC0140423	Regeneratable charcoal
TAMAYA 2.0	CFC0140343	Charcoal
	CFC0162221	Regeneratable charcoal
THIN	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
THIN ISLAND	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
TONDA	CFC0140124	Charcoal
TRIBE A	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal
TRIBE A ISLAND	CFC0141529A	Charcoal
	CFC0141725A	Regeneratable charcoal

	FILTER CODE	FILTER TYPE
TUBE PRO ISLAND	CFC0140423	Regeneratable charcoal
WAVE UX	CFC0140088	Regeneratable charcoal
YIN	CFC0141737	Regeneratable charcoal

ODOUR FILTERS


	FILTER CODE	FILTER TYPE
NIKOLATESLA ALPHA	KIT0167755	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA FIT	KIT0167755	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA FIT 3Z	KIT0167755	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA FIT XL	KIT0167755	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA FLAME	KIT0120952A	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA LIBRA	KIT0120952A	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA ONE	KIT0120952A	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA ONE HP	KIT0120952A	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA PRIME S / PRIME PLUS S	KIT0167755	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA SWITCH	KIT0120952A	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA SWITCH GLOW	KIT0120952A	HP Regeneratable anti-odour ceramic filter
NIKOLATESLA UNPLUGGED	KIT0120952A	HP Regeneratable anti-odour ceramic filter

* see the dedicated section for the ceiling model carbon filter kits

CEILING HOOD REMOTE MOTORS

The choice of a remote motor, positioned according to installation needs, allows for lower noise levels when the hood is in operation, and fume and odour capture is optimized, thanks to the improved extraction efficiency of this type of motor.

The following motors are intended exclusively for installation on compatible ceiling hoods. It is possible to choose between 4 different types of motors based on installation needs.


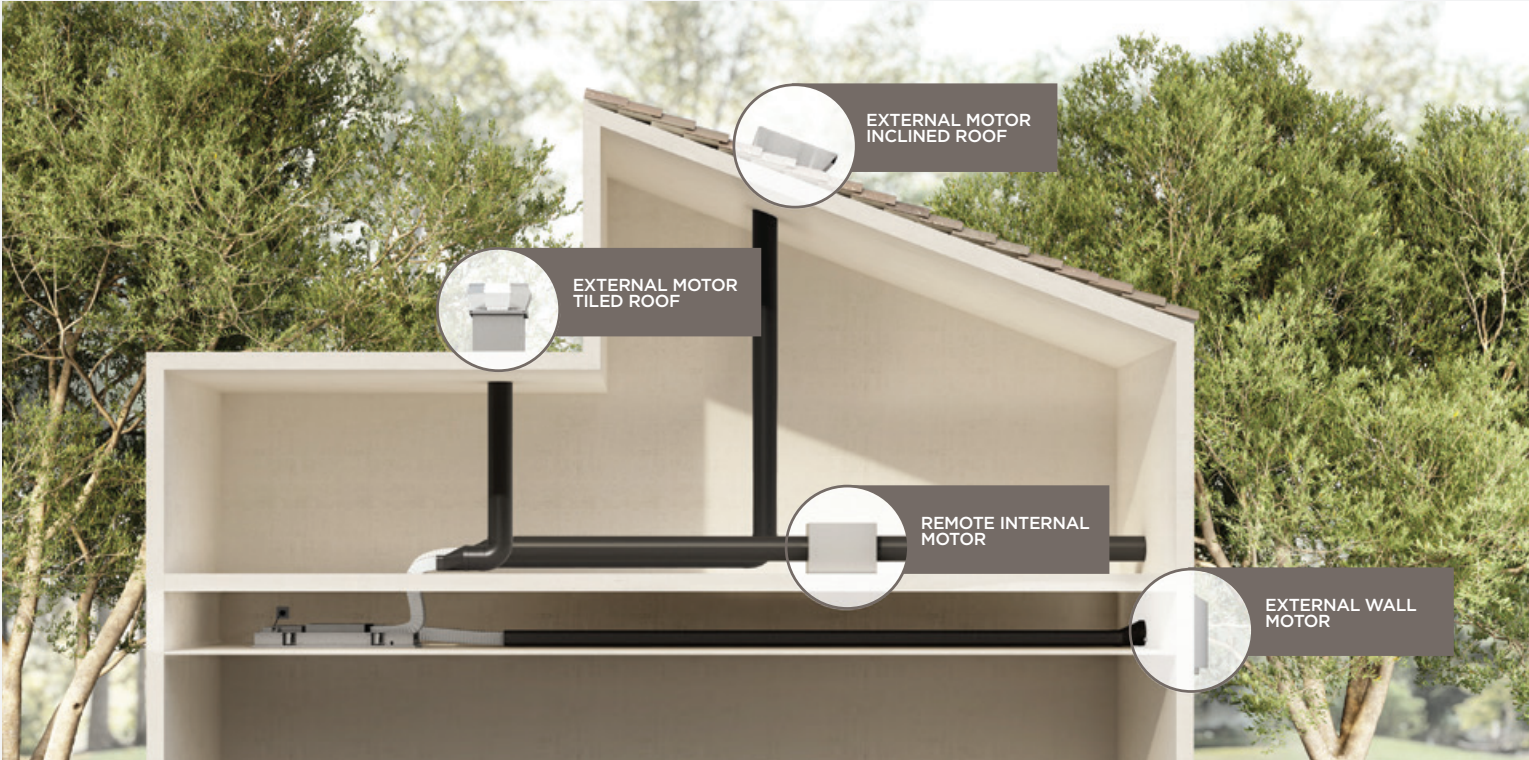


KIT0184296 REMOTE INTERNAL MOTOR



H False ceiling	> 30cm
Exit	Ø 15cm round
Hood-exit distance	max 7 linear mt*
+ 7 metre long extension cable KIT0161392	

* Without bends. Deduct 1 mt. for each bend.

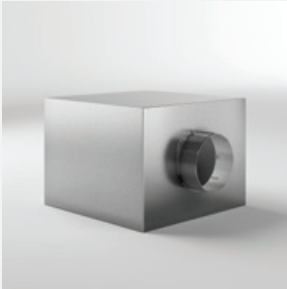

Airflow 2150 m³/h
Total absorption 250 W
Exit 150 mm



Available for
HILIGHT GLASS / HILIGHT-X
ILLUSION PLUS / SKYDOME PLUS

KIT0184135 GME EXTERNAL WALL MOTOR



H False ceiling	> 16,2cm
Exit	Ø 15cm round
Hood-exit distance	max 7 linear mt*
+ 7 metre long extension cable KIT0161392	

* Without bends. Deduct 1 mt. for each bend.

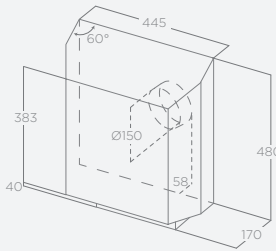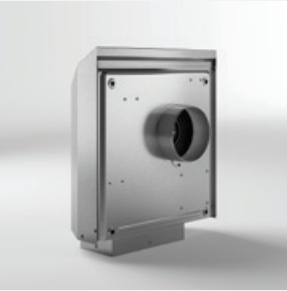

Airflow 1300 m³/h
Total absorption 275 W
Exit 150 mm


Available for
HILIGHT GLASS / HILIGHT-X
ILLUSION PLUS / SKYDOME PLUS

KIT0147882 GME EXTERNAL INCLINED ROOF



H False ceiling	> 16,2cm
Exit	Ø 15cm round
Hood-exit distance	max 7 linear mt*
+ 7 metre long extension cable KIT0161392	

* Without bends. Deduct 1 mt. for each bend.

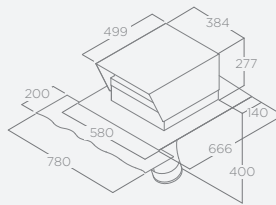

Airflow 1200 m³/h
Total absorption 200 W
Exit 150 mm



Available for
HILIGHT GLASS / HILIGHT-X
ILLUSION PLUS / SKYDOME PLUS

KIT0147881 GME EXTERNAL TILED ROOF



H False ceiling	> 16,2cm
Exit	Ø 15cm round
Hood-exit distance	max 7 linear mt*
+ 7 metre long extension cable KIT0161392	

* Without bends. Deduct 1 mt. for each bend.

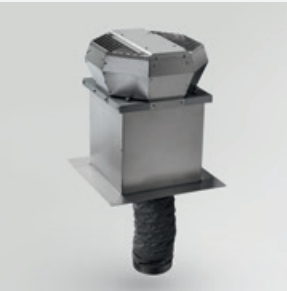


Airflow 1200 m³/h
Total absorption 200 W
Exit 150 mm

Available for
HILIGHT GLASS / HILIGHT-X
ILLUSION PLUS / SKYDOME PLUS


REMOTE MOTORS

The following motors can only be installed on our traditional and Downdraft models already predisposed for this purpose.

Downdraft

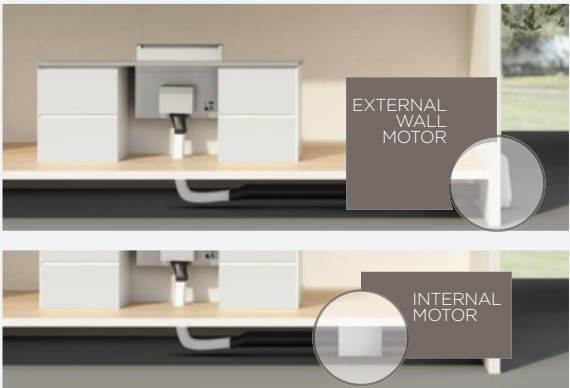

Traditional hood

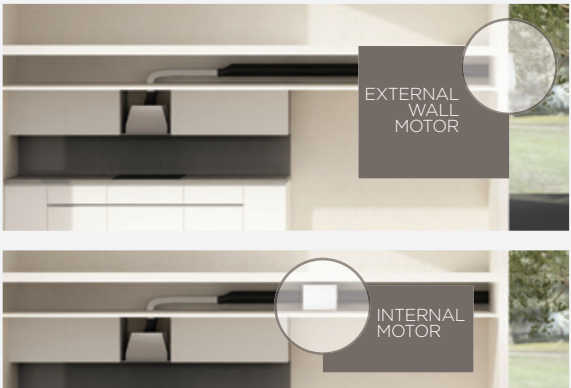

GME22A EXTERNAL WALL MOTOR (PRF0179706)



Exit	Ø 15cm round
Hood-exit distance	max 5 linear mt*



+ 7 metre long extension cable
KIT0161392

* Without bends. Deduct 1 mt. for each bend.

GME22A EXTERNAL WALL MOTOR (PRF0179706)

Airflow	1200 m³/h
Total absorption	190 W
Exit	150 mm


Available for
CT35 PRO / PANDORA

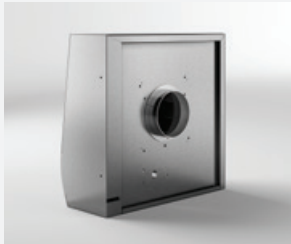

GME HE MOTOR (PRF0171142)

Airflow	551 m³/h
Total absorption	171 W
Duct size	150 mm

Available for
LANE





GME88 REMOTE INTERNAL MOTOR (PRF0046491A)
GME11 REMOTE INTERNAL MOTOR (PRF0006209A)



Exit	Ø 15cm round
Hood-exit distance	max 5 linear mt*

+ 7 metre long extension cable
KIT0161392

* Without bends. Deduct 1 mt. for each bend.

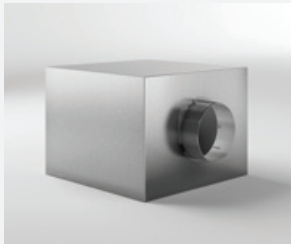

GME88 REMOTE INTERNAL MOTOR (PRF0046491A)

Airflow	1495 m³/h
Total absorption	250 W(50Hz) 390 W(60Hz) 150 mm
Exit	
Available for	PANDORA

GME11 REMOTE INTERNAL MOTOR (PRF0006209A)

Airflow	1000 m³/h
Total absorption	275 W
Exit	150 mm
Available for	CT35 PRO, LANE

CARBON FILTERS KIT



KIT0148449
Recycling kit H30 models:
HILIGHT-X H30
HILIGHT-GLS H30
ILLUSION PLUS H30
SKYDOME PLUS H30
LULLABY DUCT-OUT VERS.



KIT0148450A
High performance recirculating kit for:
CLOUD SEVEN DUCT-OUT VERS.
HILIGHT-X H16
HILIGHT-GLS H16
HILIGHT-X H30
HILIGHT-GLS H30
ILLUSION PLUS H16
ILLUSION PLUS H30
SKYDOME PLUS H16
SKYDOME PLUS H30
LULLABY DUCT-OUT VERS.




KIT0167743
Long life filter kit with filters that can be regenerated for:
CLOUD SEVEN DUCT-OUT VERS.
HILIGHT-X H16
HILIGHT-GLS H16
HILIGHT-X H30
HILIGHT-GLS H30
ILLUSION PLUS H16
ILLUSION PLUS H30
SKYDOME PLUS H16
SKYDOME PLUS H30



KIT0168749
Replacement filter for:
KIT0148450A



KIT0168748
Replacement filter for:
KIT0167743

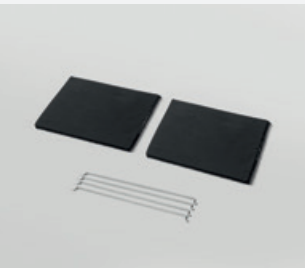


CFC0140426
Regeneratable filter for:
CLOUD SEVEN FILTERING VERSION



KIT0147861A
Ceramic filter for:
LULLABY FILTERING VERSION


CHIMNEY KITS

STAINLESS STEEL CHIMNEY KIT

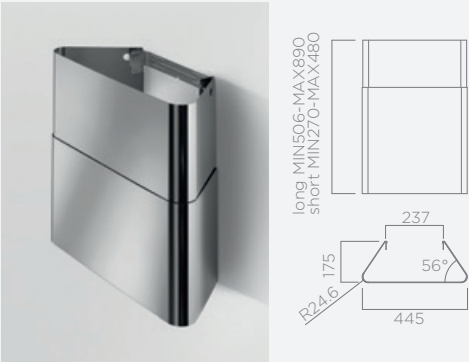


Long KIT0010439 Short KIT0010700
Available for
IO AIR

STAINLESS STEEL CHIMNEY KIT H12

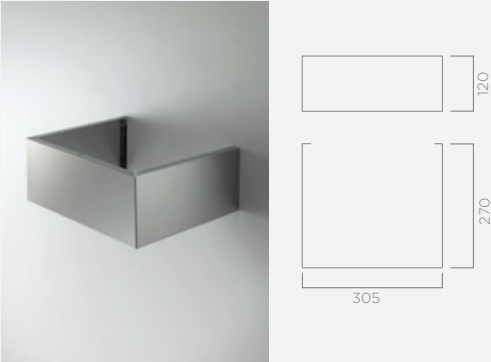


KIT0091876
Available for
BOXIN ADVANCE / BOXIN DRY / BOXIN HE /
BOXIN LUX / LEVER

STAINLESS STEEL CHIMNEY KIT H185+H185

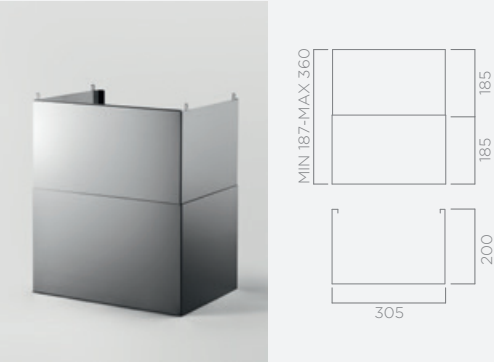

KIT0141458
Available for
BOXIN ADVANCE / BOXIN DRY / BOXIN HE /
BOXIN LUX / SLEEK 2.0 / SLEEK ADVANCE /
LEVER

BLACK CHIMNEY KIT

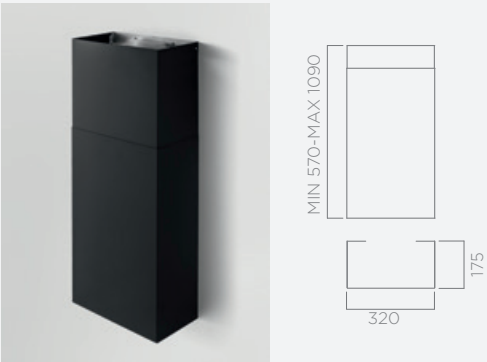


KIT0166364
Available for
PLAT / RULES / SUPER PLAT

STAINLESS STEEL CHIMNEY KIT



KIT0171543
Available for
PLAT / RULES / SUPER PLAT

BLACK CHIMNEY KIT

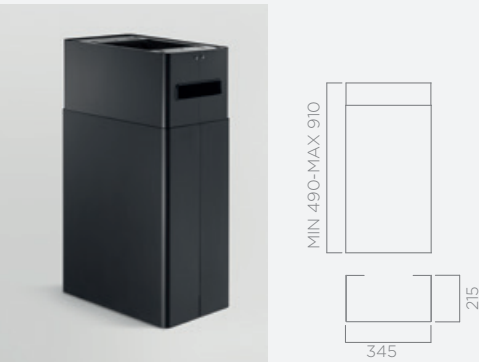

KIT0175017
Available for
IKONA MAXXI PURE

STAINLESS STEEL CHIMNEY KIT



KIT0175018
Available for
IKONA MAXXI PURE

	NON RETURN VALVE
KIT0010439 / KIT0010700	✓
KIT0091876	---
KIT0141458	---
KIT0166364	✓
KIT0171543	✓


SHELF KITS

LULLABY



KIT0147858

SHELF KIT LULLABY
(WOODEN)



KIT0147859

SHELF KIT LULLABY
(WHITE)

BIO



SHELF KIT BIO 60CM


KIT0120946

BIO ISLAND



KIT0120947

SHELF KIT BIO ISLAND 60CM
+ 2 CABLES



KIT0120948

KIT CABLES BIO ISLAND 1,7 MT

D R Kitchen Appliances Ltd
2 Alpha Road, Aldershot
Hampshire GU12 4RG
t: 01252 351111
e: sales@drcookerhoods.co.uk
www.elica.co.uk

Twitter: @elicahoods
Facebook: elicacookerhoods
Pinterest: elica hoods
Houzz

