

ELICA PRO SERIES

LEONE ISLAND



HUSH
SYSTEM



LED
REPLACEABLE



SEAMLESS
LOOK



GREASE
COLLECTORS





PROFESSIONAL
PERFORMANCE



HEAT GUARD

ELICA'S EXCLUSIVE
PLUS FEATURES

Designed to be suspended above a kitchen island, Leone's crisp lines, beveled rim and gleaming stainless steel deliver professional cooking with a sense of style. Give your kitchen a splash of Italian design with a chimney style island hood that has the extra depth and power required to support professional ranges and cooktops. Available in 36" and 42" widths, Leone Island comes equipped with an extra powerful 1200 CFM internal blower and backlit hidden metallic in/out knobs, which operate the 4 speed blower and LED lighting

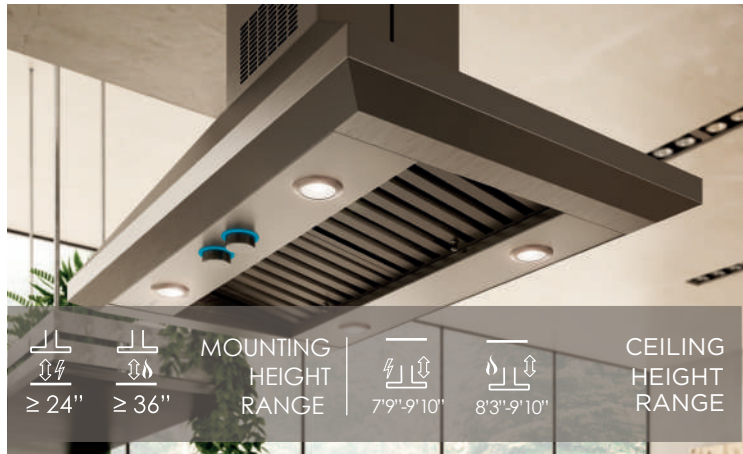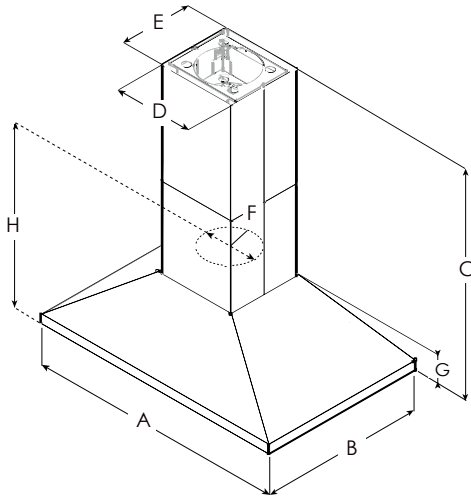

≥ 24"



≥ 36"

MOUNTING
HEIGHT
RANGE



7'9"-9'10"



8'3"-9'10"


CEILING
HEIGHT
RANGE


| | ELI136S2 | ELI142S2 |
|---|--|----------------|
| A | 36" (91.4 cm) | 42" (106.7 cm) |
| B | 27" (68.6 cm) | |
| C | Max: 46 9/16" (118.3 cm) Min: 37 1/2" (95.3 cm) | |
| D | 13 1/8" (33.2 cm) | |
| E | 12" (30.5 cm) | |
| F | 8" (20.3 cm) | |
| G | 12 3/4" (32.4 cm) | |
| H | 17 1/2" (44.3 cm) | |


SPECIFICATIONS


| Width: | 36" Unit | 42" Unit |
|---|--|---|
| Model: | ELI136S2 | ELI142S2 |
| Dimensions: | 36"W x 27"D x Min 37 1/2 Max 46 9/16" H | 42"W x 27"D x Min 37 1/2 Max 46 9/16" H |
| Blower Type(internal):** | 1200 CFM(4-speed) | |
| Noise (sones):** | 8.5 Sones | |
| Finish: | Stainless Steel | |
| Controls: | Fully Retractable knobs with blue backlight | |
| Illumination: | 4 LED Lights, 6.5 W, 3000 K, 540 Lumen/Lamp | |
| Grease Filter: | (2) Dishwasher-Safe, Professional Stainless Steel Baffle | |
| Duct Transition: | 8" Round with BackDraft Damper (top only) | |
| Installation Type: | Ducted Installation Only | |
| Telescopic Chimney: | For ceiling heights 7'9" - 9'10" (over electric cooking), 8'3" - 9'10" (over gas cooking) | |
| Electrical: | 120V - 60 Hz, 926 W | |
| KITS: | KIT0100317 (Can reach up to 13'6") | |
| Long Chimney Extension Kit: | | |
| 1200 CFM External Blower Kit: | KIT0153054 | |
| 1200 CFM In-line Blower Kit: | KIT0154387 | |
| Inline Blower Shell Kit: | KIT0179549 (for use with 1200 CFM blowers only) | |
| External Blower Shell Kit: | KIT0179547 (for use with 1200 CFM blowers only) | |
| Electronic CFM Reduction Bypass KIT: | KIT0185099 (for 1200 CFM Blower) | |
| WARRANTY:*** | Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com. | |


PLUS FEATURES


- 

HUSH SYSTEM - An exclusive sound deadening technology that effectively reduces sound levels by over 35%
- 

LED CONSUMER REPLACEABLE BULB - High quality LED lighting usually requires a skilled technician to replace lamps. Avoid this expense with Elica's new LED lamps that enable homeowners to replace in seconds
- 

SEAMLESS CRAFTSMANSHIP - Heavy gauge stainless steel "Seamless" construction that delivers refined elegance.
- 

STAINLESS STEEL BAFFLE FILTERS WITH GREASE COLLECTORS - Designed for high airflow cooking, the "S" shape design traps high volumes of grease
- 

PROFESSIONAL PERFORMANCE - Special features and high performances for models with aspiration capacity between 600 and 1200 CFM's
- 

HEAT GUARD - Senses extreme temperatures (>158 °F) and automatically adjusts the blower speed to HIGH



* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

*** For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.

| Certified Ratings | High Speed | Working Speed | Duct Size |
|-------------------|------------|---------------|---------------|
| CFM | 780 | 310 | 6" (Vertical) |
| Sones | 12.5 | 3 | 6" (Vertical) |