



NEW CEILING OVERVIEW



PERFORMANCE vs INSTALLATION

H30 –INSTALLATION



INSTALLAZIONE H30 - H30 INSTALLATION



In the H30 models, outlets can be run from any of the 5 sides of the engine box, allowing you to decide on which side to attach the air outlet duct.

Duct out to Recycling False Ceiling



L Regenerable by washing
And dry by oven 100° C @10 min (Life 3 Years)

Recycling Kit Base
KIT0167875




L

Up to 70%



HILIGHT




ILLUSION



Example images, shape and dimension may vary

Recycling & Others

Duct Out to Recycling: KIT0167875

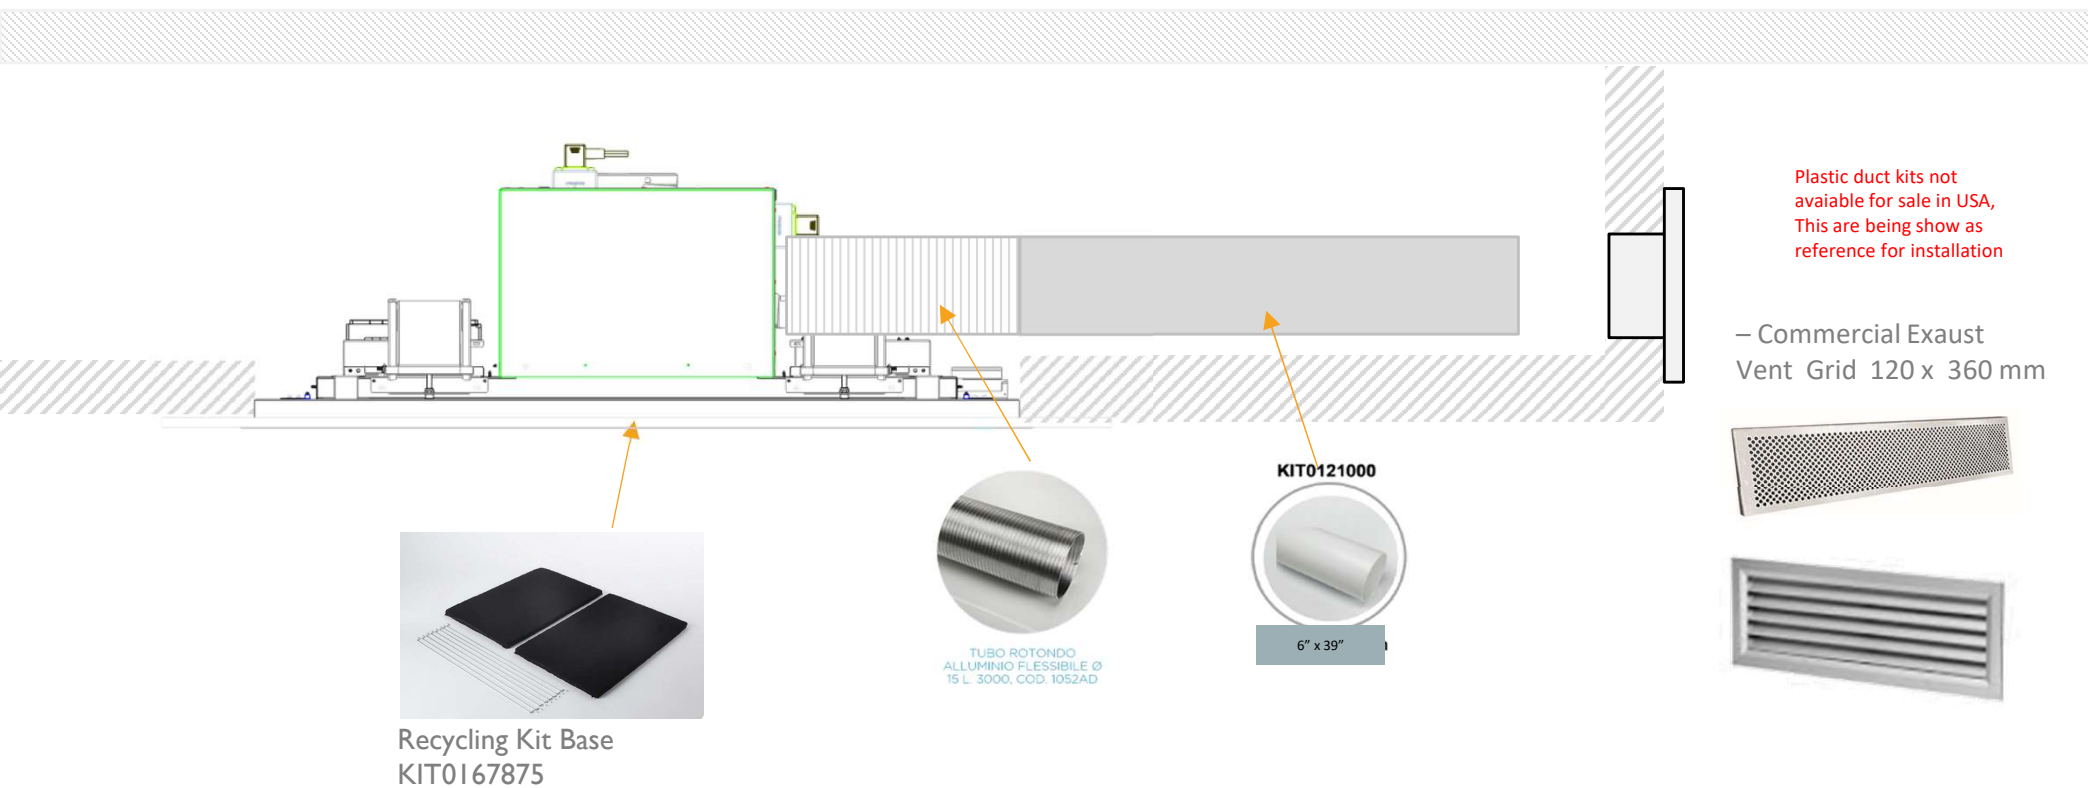

Plastic duct kits not available for sale in USA, This are being show as reference for installation

– Commercial Exhaust Vent Grid 120 x 360 mm



** For Ducting connection is also possible to use screw to create a more rigid Joint Between components



**LONG LIFE
FILTER**



IT

Il "Long Life Filter" è stato sviluppato da Elica per esaltare al massimo la pulizia dell'aria in cucina. Grazie alla sua particolare struttura, è rigenerabile fino a 3 anni e ti permette di risparmiare sulla manutenzione della cappa garantendoti prestazioni ottimali nel tempo.

EN

The "Long Life Filter" was developed by Elica to maximise air cleanliness in the kitchen. Thanks to its special structure, it can be regenerated for up to 3 years and allows savings on hood maintenance costs, guaranteeing excellent performance over time.

ES

El "Long Life Filter" ha sido desarrollado por Elica para exaltar al máximo la limpieza del aire en la cocina. Gracias a su particular estructura, es regenerable hasta los 3 años y le permite ahorrar en el mantenimiento de la campana garantizándole prestaciones óptimas en el tiempo.



FR

Le « Long Life Filter » a été développé par Elica pour améliorer au maximum le nettoyage de l'air dans la cuisine. Grâce à sa structure particulière, il est régénérable jusqu'à 3 ans et vous permet d'économiser sur l'entretien de la hotte, tout en vous garantissant des prestations optimales au fil du temps.

DE


Der "Long Life Filter" wurde von Elica für eine maximale Reinigung der Luft in der Küche entwickelt. Dank seiner besonderen Struktur ist er bis 3 Jahre regenerierbar und erlaubt bei der Wartung der Dunstabzugshaube Kosten einzusparen, indem er Ihnen optimale Leistungen für lange Zeit garantiert.

INSTALLAZIONE | INSTALLATION | INSTALACIÓN

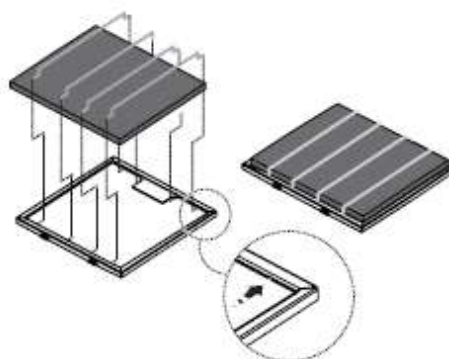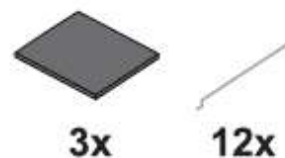

Tutte le immagini sono esempi di installazione | All images are examples of installation | Toutes les images sont exemples de l'installation
Toutes les images sont des exemples d'installation | Alle Abbildungen sind Beispiele für die Installation

- IT MANUTENZIONE E SMALTIMENTO
- EN MAINTENANCE AND DISPOSAL
- ES MANTENIMIENTO Y ELIMINACIÓN
- FR ENTRETIEN ET ELIMINATION
- DE WARTUNG UND ENTSORGUNG

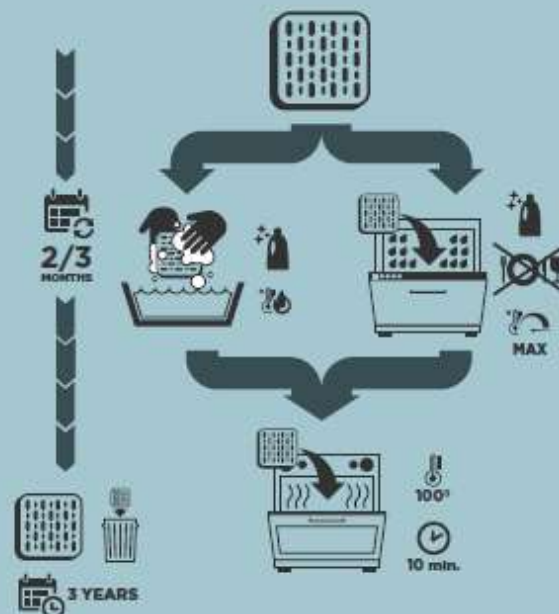



REMOTE CONTROL USE

Spare parts and accesories



Focus on remote controls

The new Elica remote control, is super thin, resistant and practical, thanks to the magnets that allow it to be placed on metal object. It comes in glass and aluminum, in black or white.



Spare parts and accessories




Focus on remote controls

- The + key increases the aspiration power, while the – key decreases it. By holding down the latter, the hood switches off regardless of its current speed.
- Allows you to turn on the AMBIENT LIGHT. Hold down for a longer time to adjust the brightness of the light.
- The LIGHT above the HOB is switched on by lightly pressing the key. By holding it down for a longer period, you can activate the advanced features, according to your model: the DIM-LIGHT (that adjusts brightness) or the TUNE-WHITE (that allows for the variation of the led light temperature)
- Rechargeable battery with micro USB plug. (cord included).



Spare parts and accesories

Focus on remote controls

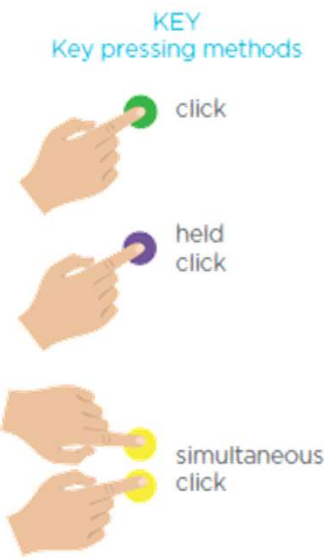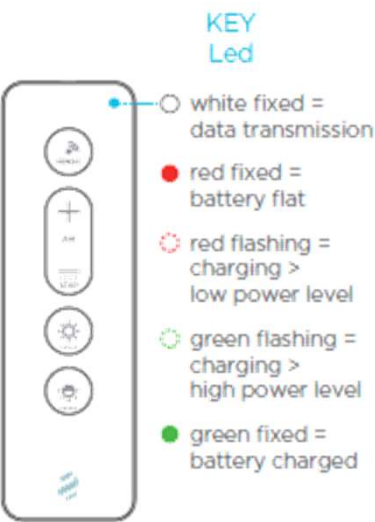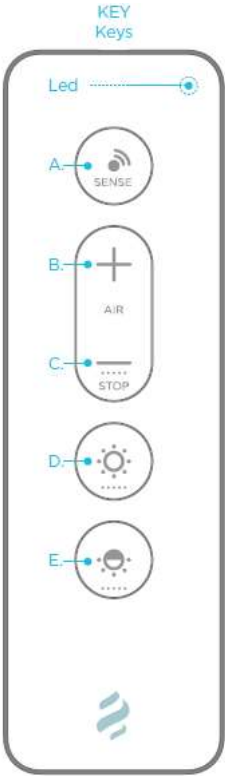


Spare parts and accessories

Focus on remote controls: AFFILIATION

1 | AFFILIATION

Disconnect and then reconnect the hood to the power supply and within the first minute, press keys **B** and **E** for 5 seconds.

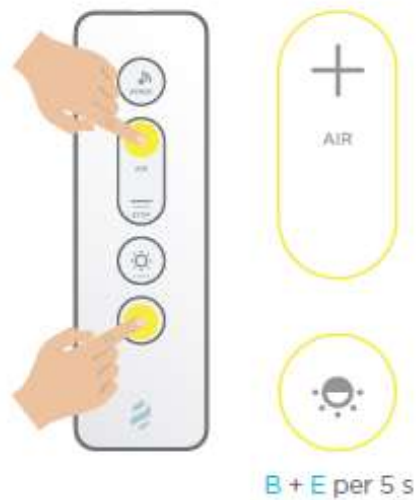


NOTE!

If affiliation is unsuccessful, disconnect and then reconnect the hood to the power supply and repeat the *affiliation* procedure.

Spare parts and accessories

Focus on remote controls: SPEED

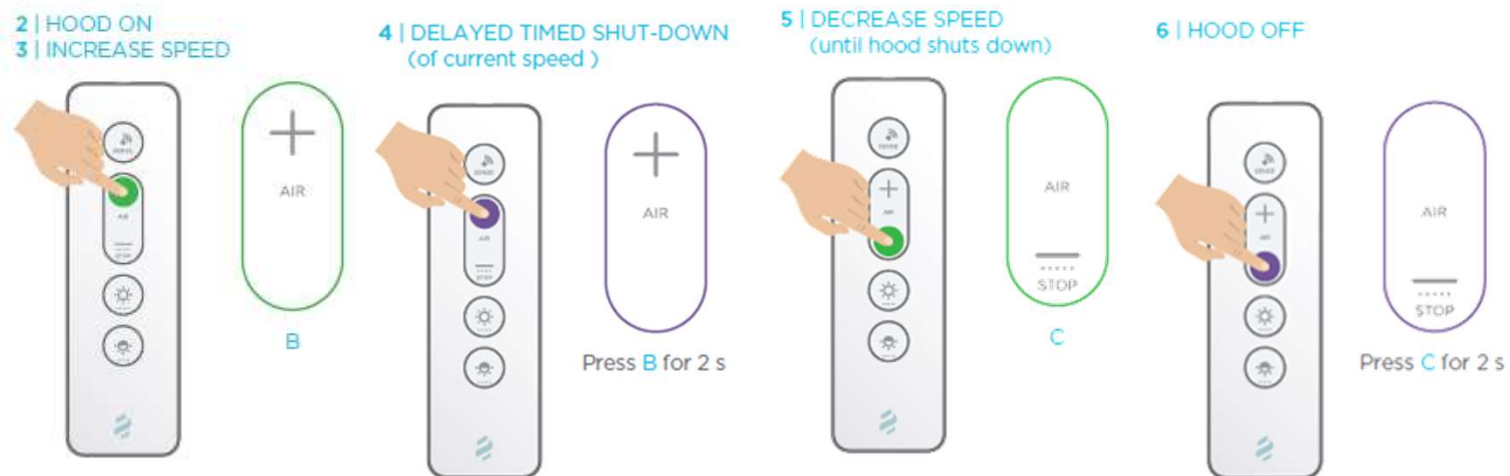


CAUTION!!

Some functions marked here with an (#) can only be activated on certain hood models.
See the operation and maintenance manual for your specify hood for further information.

Spare parts and accessories

Focus on remote controls: Light

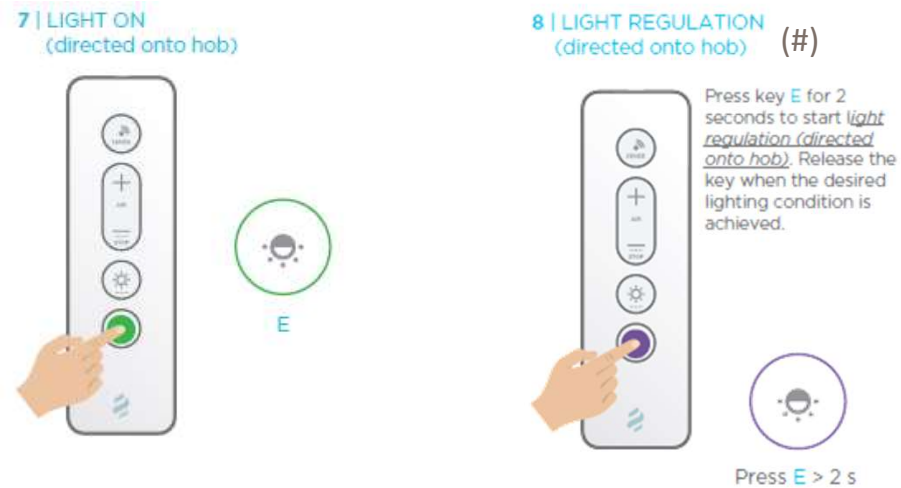

CAUTION!!

Some functions marked here with an (#) can only be activated on certain hood models. See the operation and maintenance manual for your specify hood for further information.

Spare parts and accessories

Focus on remote controls: Ambient Light

9 | AMBIENT LIGHT ON (#)




10 | AMBIENT LIGHT REGULATION (#)



Press key **D** for 2 seconds to start ambient light regulation. Release the key when the desired lighting condition is achieved.

Press **D** > 2 s

11 | LIGHT TONE REGULATION (#) (warm/cold light)

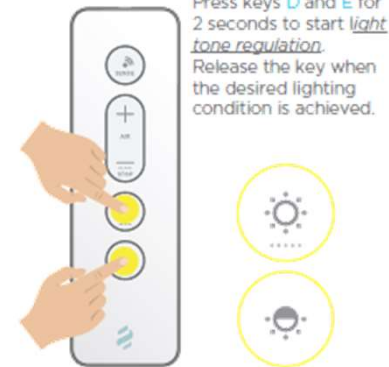

Press keys **D** and **E** for 2 seconds to start light tone regulation. Release the key when the desired lighting condition is achieved.

D + E > 2 s


CAUTION!!

Some functions marked here with an (#) can only be activated on certain hood models. See the operation and maintenance manual for your specify hood for further information.

Spare parts and accessories

Focus on remote controls: EXTRA FUNCTIONS


12 | SENSOR ACTIVATION (#)

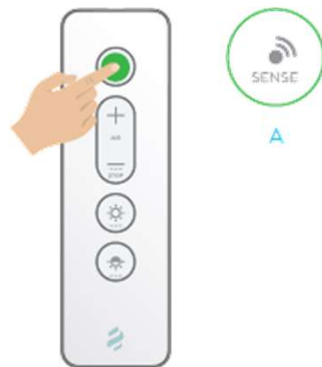

13 | RESET FILTERS (#)



14 | NEW CODE ALLOCATION (#)

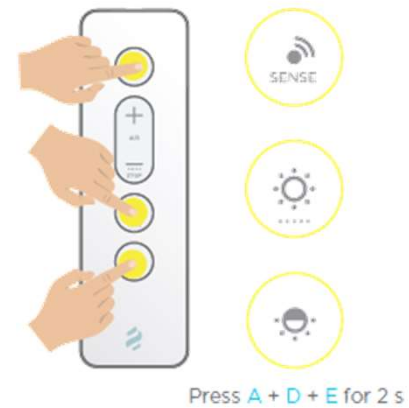

CAUTION!!


Some functions marked here with an (#) can only be activated on certain hood models.
See the operation and maintenance manual for your specify hood for further information.



INSTALLATION TUTORIALS

INSTALLATION TUTORIALS


Duct Out



HILIGHT ILLUSION



Recycling



TUTORIALS BY STEPS



Hood

- 1

Internal Ducting Preparation
in the ceiling
 - 1.1 Circular
 - 1.2 Rectangular
- 2

Preparing the False Ceiling
 - 2.1 Cut
 - 2.2 constrains
 - 2.3 Weights and distances
 - 2.4 Reinforcement suggestions
- 3

Hood Installation
 - 3.1 Hood preparation
 - 3.2 Connection to Circular Ducting
 - 3.3 Connection to rectangular Ducting
- 4

- Super Easy installation



Recycling & External Blowers

- Recycling Box KIT0148450
- Duct out to Recycling
- External Blower
- Kit Condensing Water Separator



TUTORIALS BY STEPS



Hood

1

Internal Ducting Preparation
in the ceiling

- 1.1 Circular
- 1.2 Rectangular



2

Preparing the False Ceiling

- 2.1 Cut
- 2.2 constrains
- 2.3 Weights and distances
- 2.4 Reinforcement suggestions



3

Hood Installation

- 3.1 Hood preparation
- 3.2 Connection to Circular Ducting
- 3.3 Connection to rectangular Ducting



4

- Super Easy installation



Recycling & External Blowers

- Recycling Box KIT0148450



- Duct out to Recycling



- External Blower

- Kit Condensing Water Separator



TUTORIALS BY STEPS



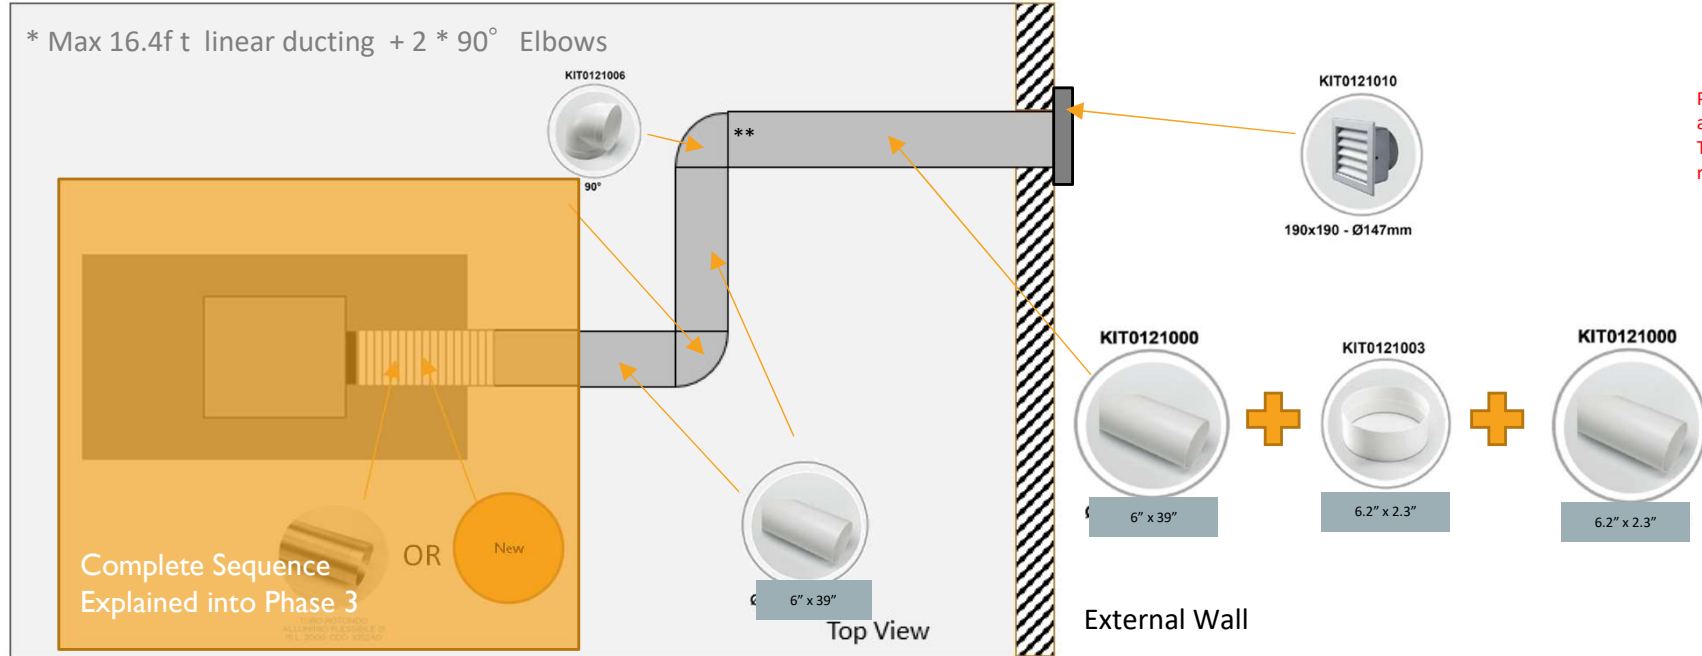
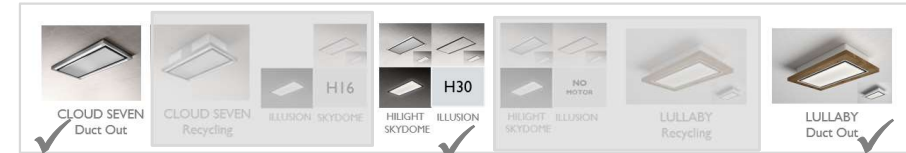



1 1.1 Internal Ducting Preparation in the ceiling: example of Circular $\varnothing 6''$



- * Max length suggested to have optimal performances
- ** For Ducting connection is also possible to use screw to create a more rigid Joint Beetween components

TUTORIALS BY STEPS





	 CLOUD SEVEN Duct Out	 CLOUD SEVEN Recycling	 ILLUSION SKYDOME H16	 HILIGHT SKYDOME H30	 HILIGHT ILLUSION NO MOTOR	 LULLABY Recycling	 LULLABY Duct Out
Hood 1 Internal Ducting Preparation in the ceiling <ul style="list-style-type: none"> - 1.1 Circular - 1.2 Rectangular 	✓		✓	✓	✓		✓
2 Preparing the False Ceiling <ul style="list-style-type: none"> - 2.1 Cut - 2.2 constrains - 2.3 Weights and distances - 2.4 Reinforcement suggestions 	✓		✓	✓	✓		✓
3 Hood Installation <ul style="list-style-type: none"> - 3.1 Hood preparation - 3.2 Connection to Circular Ducting - 3.3 Connection to rectangular Ducting 	✓	✓	✓	✓	✓	✓	✓
4 - Super Easy installation			✓	✓	✓		
Recycling & External Blowers <ul style="list-style-type: none"> - Recycling Box KIT0148450 			✓	✓			
<ul style="list-style-type: none"> - Duct out to Recycling 				✓			
<ul style="list-style-type: none"> - External Blower 					✓		
<ul style="list-style-type: none"> - Kit Condensing Water Separator 	✓		✓	✓	✓		✓

TUTORIALS BY STEPS




2 Preparing the False Ceiling

- 2.1 Ceiling Cut A X B

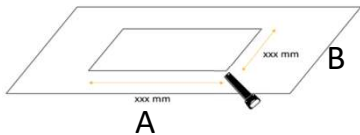


38.6" x 18.89



38.6" x 21.65


- 2.2 Ceiling Constrains : Min False Ceiling Space



Min 11.8

Min 11.8

- 2.3 Weights* and false Ceiling Distances

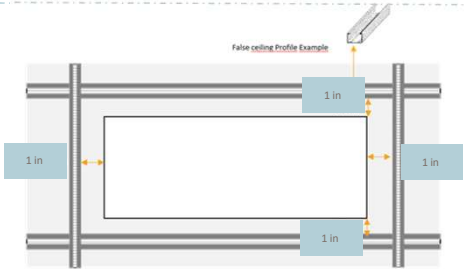

52.24 lb

58.2 lb


* Weight evaluated respect to Heavier Product

TUTORIALS BY STEPS



2 Preparing the False Ceiling

- 2.4 **Reinforcement suggestion:**
if your false ceiling it's not able to respect the weight of the Hood, please create a reinforce structure like the one showed below.

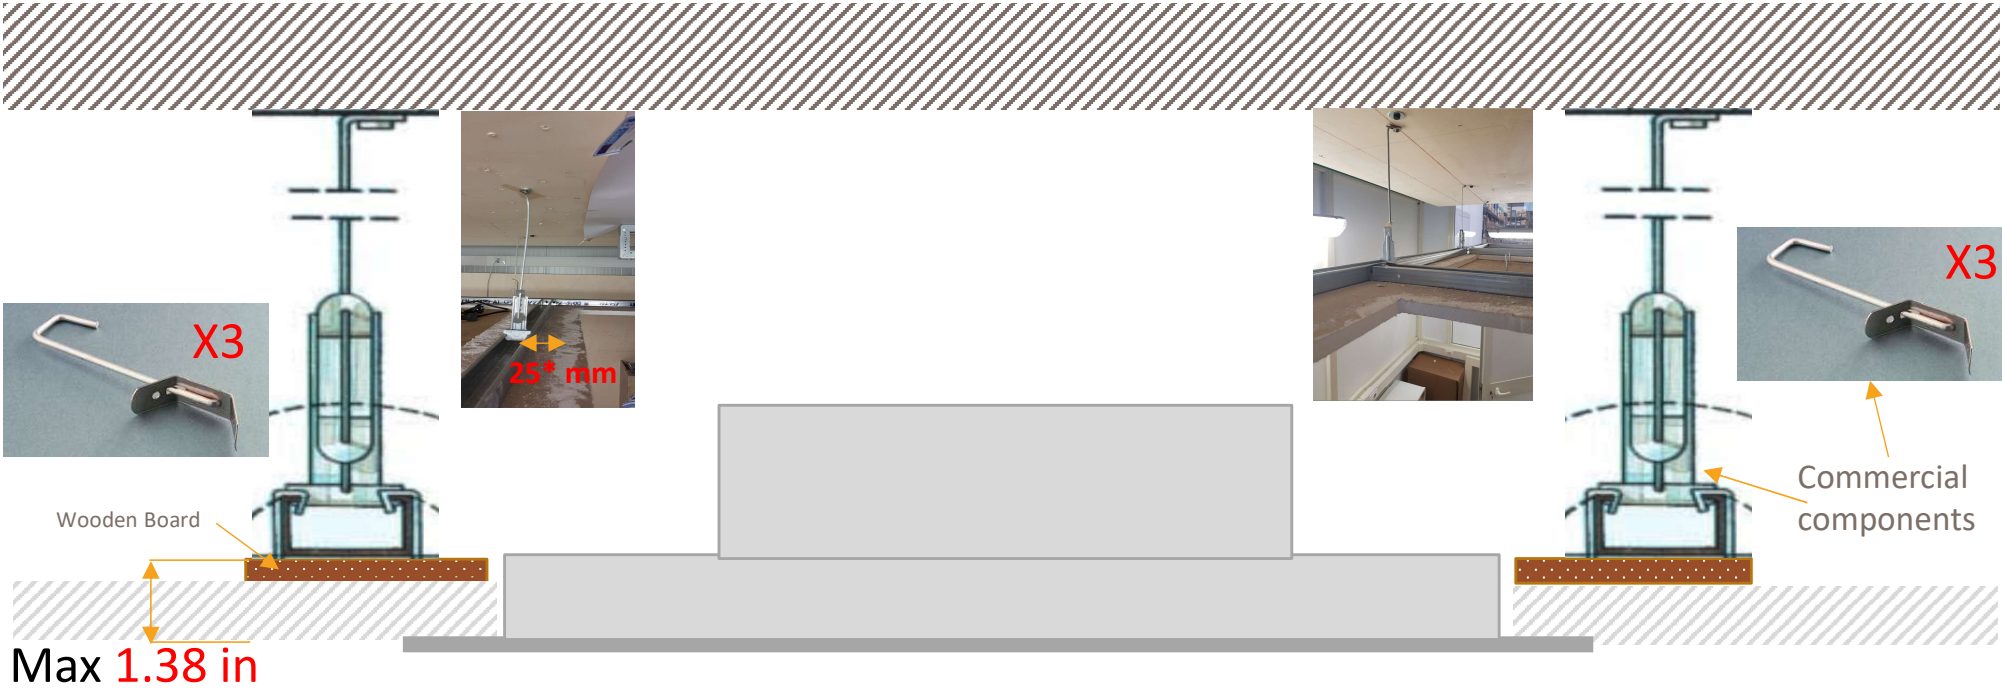

* As indicated on Product Manual


TUTORIALS BY STEPS




CLOUD SEVEN
Duct Out




CLOUD SEVEN
Recycling



ILLUSION SKYDOME



HIGHLIGHT SKYDOME



HIGHLIGHT SKYDOME



LULLABY
Recycling



LULLABY
Duct Out

Hood


1	Internal Ducting Preparation in the ceiling	✓		✓	✓	✓		✓
	- 1.1 Circular							
	- 1.2 Rectangular							
2	Preparing the False Ceiling	✓		✓	✓	✓		✓
	- 2.1 Cut							
	- 2.2 constrains							
	- 2.3 Weights and distances							
	- 2.4 Reinforcement suggestions							
3	Hood Installation	✓	✓	✓	✓	✓	✓	✓
	- 3.1 Hood preparation							
	- 3.2 Connection to Circular Ducting							
	- 3.3 Connection to rectangular Ducting							
4	- Super Easy installation			✓	✓	✓		
Recycling & External Blowers								
	- Recycling Box KIT0148450			✓	✓			
	- Duct out to Recycling				✓			
	- External Blower					✓		
	- Kit Condensing Water Separator	✓		✓	✓	✓		✓

TUTORIALS BY STEPS


3.1 Hood Preparing : H30




1) Unscrew upper blower connection




2) unmount Blower



3) Assembly the blower in upper direction or on the side required for ducting connection




4- complete installation mounting aesthetical parts e mounting grease filters e perimetral panels.



TUTORIALS BY STEPS



3 3.1 Hood installation : Connection to circular duct

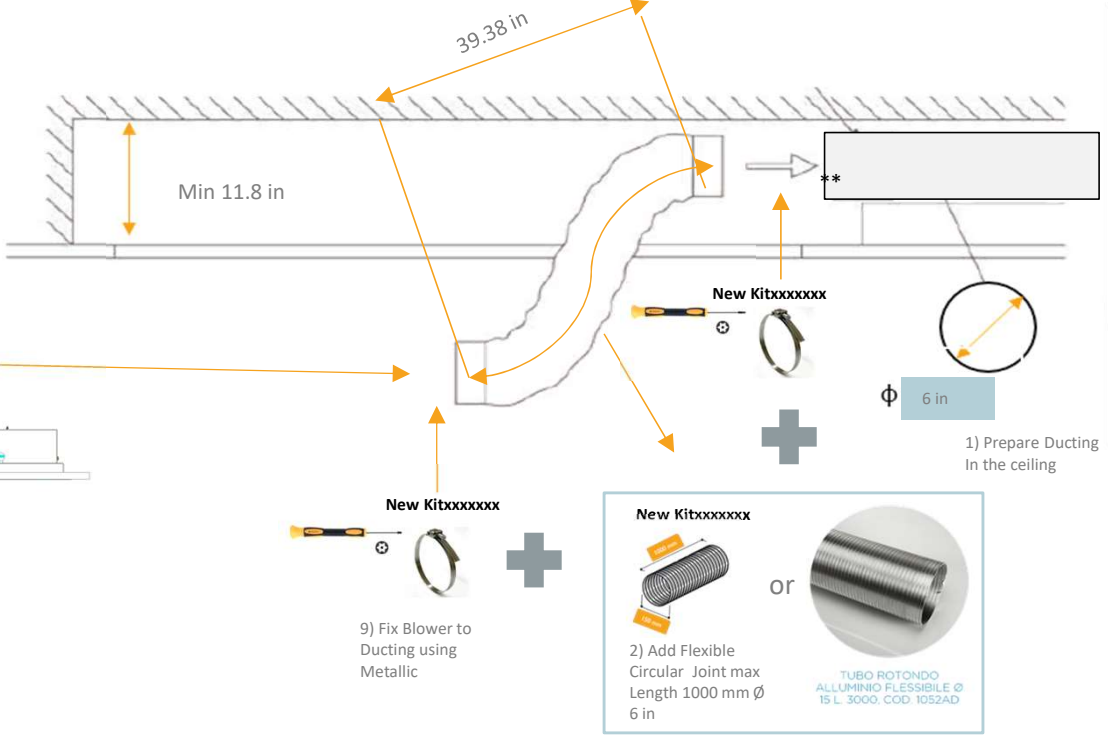

** For Ducting connection is also possible to use screw to create a more rigid Joint Between components

TUTORIALS BY STEPS



CLOUD SEVEN
Duct Out




CLOUD SEVEN
Recycling



ILLUSION



SKYDOME



HILIGHT
SKYDOME



ILLUSION



HILIGHT
SKYDOME



ILLUSION



LULLABY
Recycling



LULLABY
Duct Out

Hood

1

- Internal Ducting Preparation in the ceiling
- 1.1 Circular
- 1.2 Rectangular



2

- Preparing the False Ceiling
- 2.1 Cut
- 2.2 constraints
- 2.3 Weights and distances
- 2.4 Reinforcement suggestions



3

- Hood Installation
- 3.1 Hood preparation
- 3.2 Connection to Circular Ducting
- 3.3 Connection to rectangular Ducting



4

- Super Easy installation



Recycling & External Blowers

- Recycling Box KIT0148450



- Duct out to Recycling



- External Blower



- Kit Condensing Water Separator




TUTORIALS BY STEPS

4 SUPER EASY INSTALLATION (S.E.I.)

Installing the Ceiling range of models needs to be straightforward and safe. That is why Elica has introduced the new Super Easy Installation system. With this system, installation takes just a few, simple steps in complete safety, ensuring both the product's aesthetics and the integrity of the false ceiling.




A




BRING THE PRODUCT TO THE COMPARTMENT IN THE FALSE CEILING.

B





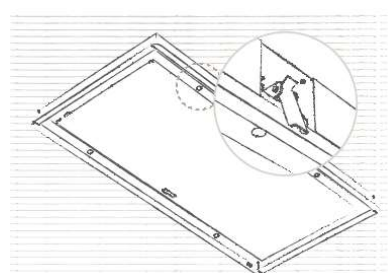


PUSH THE PRODUCT INTO THE PRACTICAL OPENING. THE BRACKETS HOLD THE PRODUCT IN THE FALSE CEILING

C

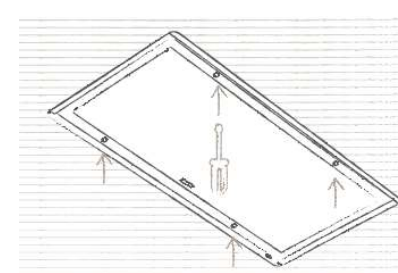

TIGHTEN THE SCREWS TO DEFINITELY FIX THE PRODUCT.
THANKS TO SEI THE PRODUCT FIT CLOSER TO THE FALSE CEILING WITH A PERFECT SURFACE ALIGNMENT.

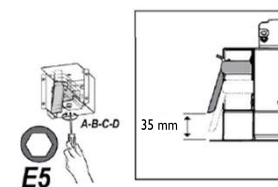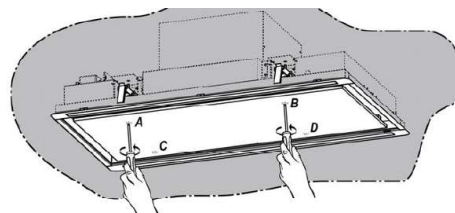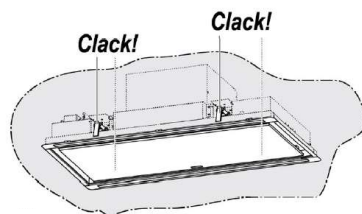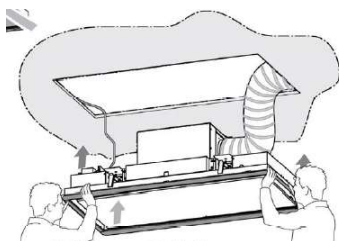


TUTORIALS BY STEPS




CLOUD SEVEN
Duct Out



CLOUD SEVEN
Recycling



ILLUSION SKYDOME



HIGHLIGHT SKYDOME



HIGHLIGHT SKYDOME



LULLABY
Recycling



LULLABY
Duct Out

Hood

1

- Internal Ducting Preparation in the ceiling
- 1.1 Circular
- 1.2 Rectangular



2

- Preparing the False Ceiling
- 2.1 Cut
- 2.2 constraints
- 2.3 Weights and distances
- 2.4 Reinforcement suggestions



3

- Hood Installation
- 3.1 Hood preparation
- 3.2 Connection to Circular Ducting
- 3.3 Connection to rectangular Ducting



4

- Super Easy installation



Recycling

- Recycling Box KIT0167875



- Duct out to Recycling



- External Blower




- Kit Condensing Water Separator



Recycling & Others

Duct Out to Recycling: KIT0167875

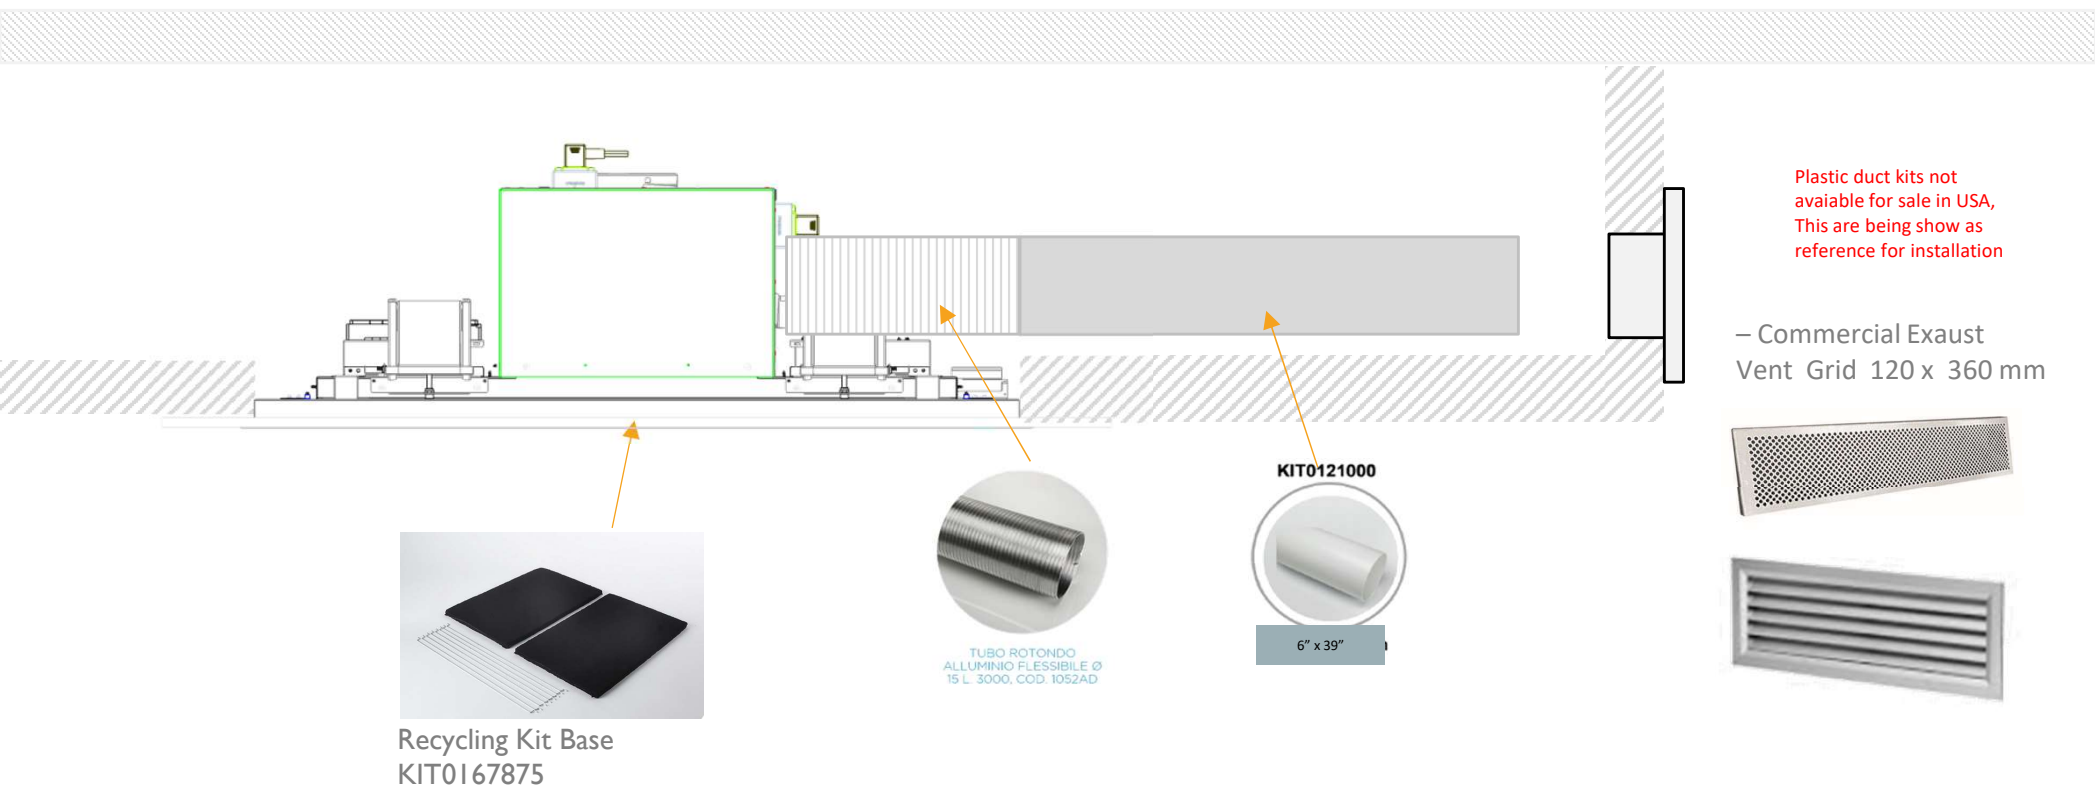

Plastic duct kits not available for sale in USA, This are being show as reference for installation

– Commercial Exhaust Vent Grid 120 x 360 mm



** For Ducting connection is also possible to use screw to create a more rigid Joint Between components

